




Programmable Logic Controller
XGB Series



LSIS

Programmable Logic Controller

XGB Series

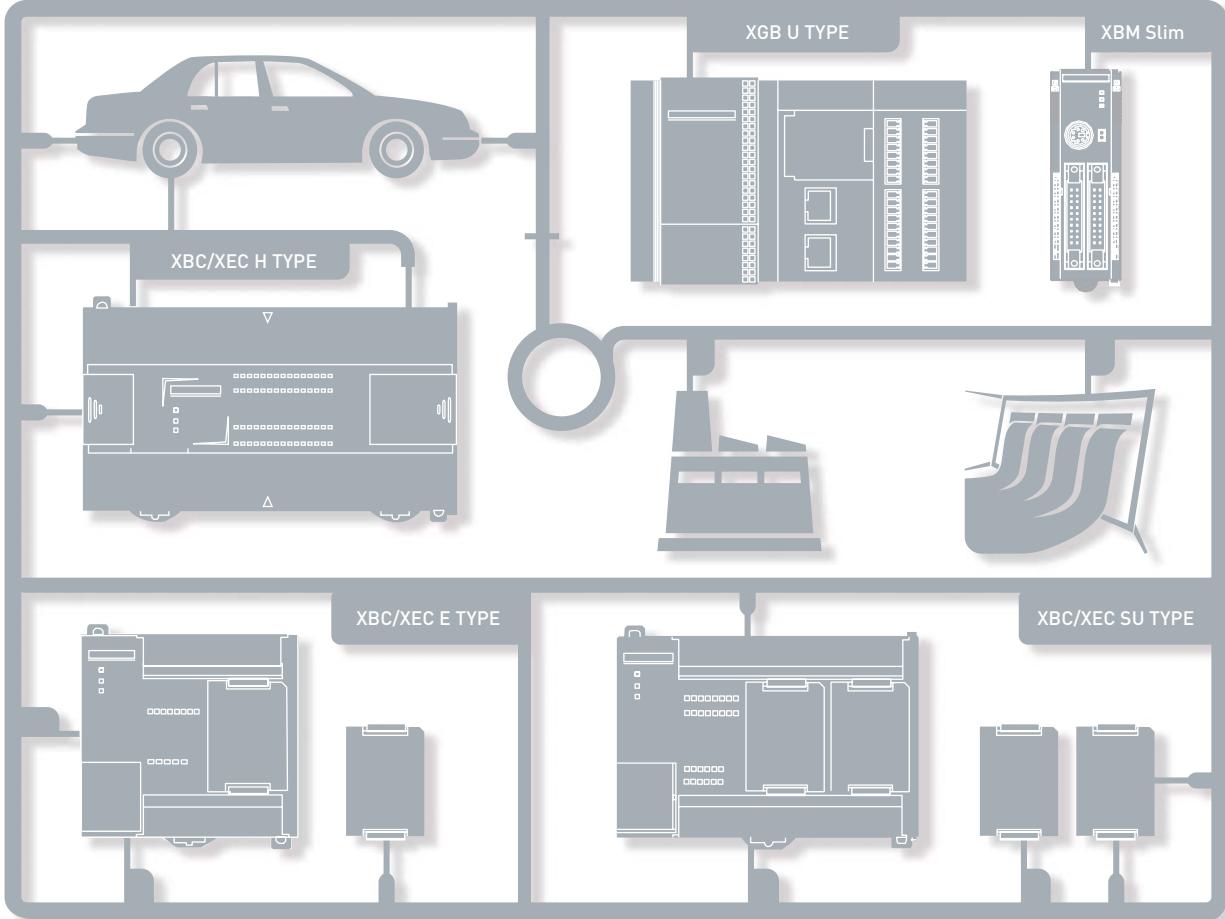


EASINESS
COMPACTNESS
FUNCTIONALITY
CONVENIENCE
HIGH PERFORMANCE

Programmable Logic Controller
XGB Series




URES


4 ~ 15




XBC/XEC U
16 ~ 23



XBC/XEC H
24 ~ 29



XBC/XEC SU
30 ~ 33



XBC/XEC E
40 ~ 47



XBM Slim
48 ~ 61



APPLICATION
62 ~ 120

FEATURES

XGB U

XBC/XEC H

XBC/XEC SU

XBC/XEC E

XBM Slim

APPLICATION

All-In-One PLC

With Next Generation Technology



XGB

XGB is a micro PLC that offers maximum performance at minimum cost.

With its high functionality, XGB supports from simple control system to complex task.

Strengthening its communication functions, XGB offers user-oriented integrated control.

Based on its strengths, XGB can be used in many application fields.



Series


It's Slim
It's Powerful



It's Slim

Item Size(W×H×D)	XBC/XEC U Type (Standard)	XBC/XEC H Type	XBC/XEC SU Type	XBC/XEC E Type	XBM Slim Type
Size(W×H×D)	150×64×90	114×64×90	135×64×90	100×64×90	30×60×90

Expansion	Special Module	Communication Module
Size (W×H×D)	$20 \times 63 \times 90$	$27 \times 63 \times 90$

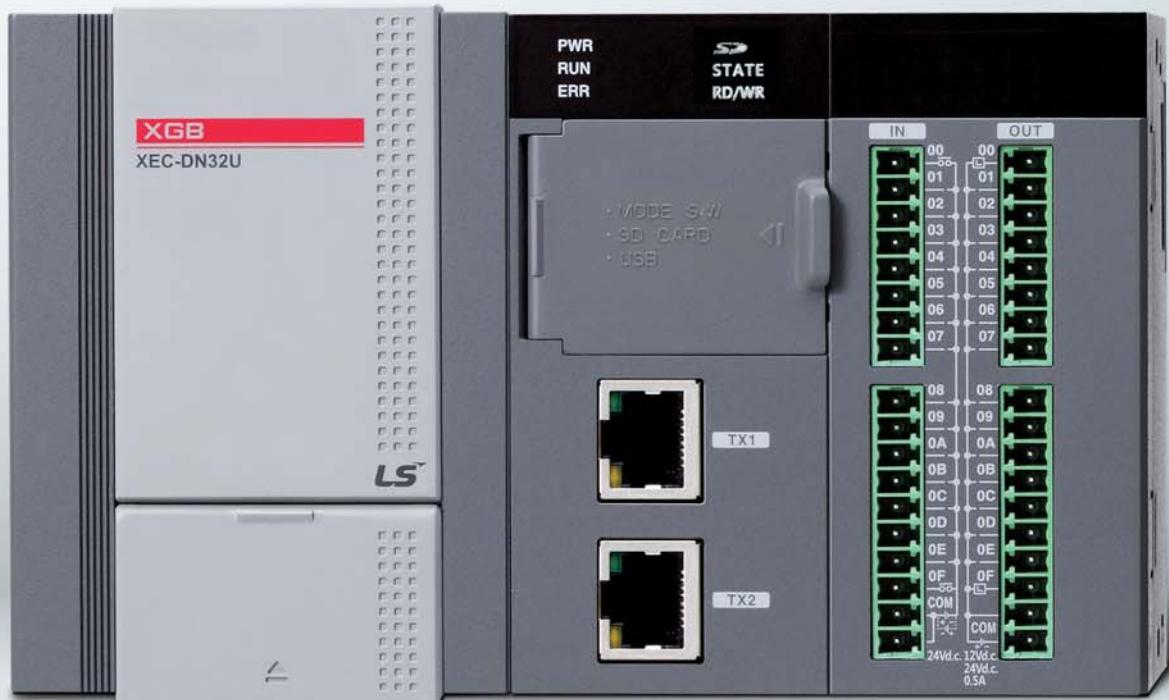

* The actual size of the product

It's Powerful



* XBC/XEC U Type

What you have dreamed of, we make it happen.

XGB U sets new standards in **Ultimate performance** with its many innovations

IoT (Internet of Things) realizes smart factories

XGB-U is a **user-oriented** controller




Various Expansion

- Compatible with XGB expansion modules
- Max. 2 High speed backplane expansion modules
- Max. 10 expansion modules
- Max. 352 I/O points
- Expansion I/O module
 - DC24 input, Transistor output, Relay output
- Special module
 - Analog input, Analog output, RTD, Thermocouple, High-speed counter, Positioning (Line drive 2 axes, EtherCAT network 8 axes)
- Communication modules
 - RS-232C, RS-422/485, Ethernet, CANopen (Master/Slave), Profibus-DP (Master/Slave), DeviceNet (Slave), EtherNet/IP, RAPIEnet


Expansion(XBC/XEC U Type)

- Max. 10 expansion modules
- Max. 2 High speed backplane modules
- Max. 2 Communication modules

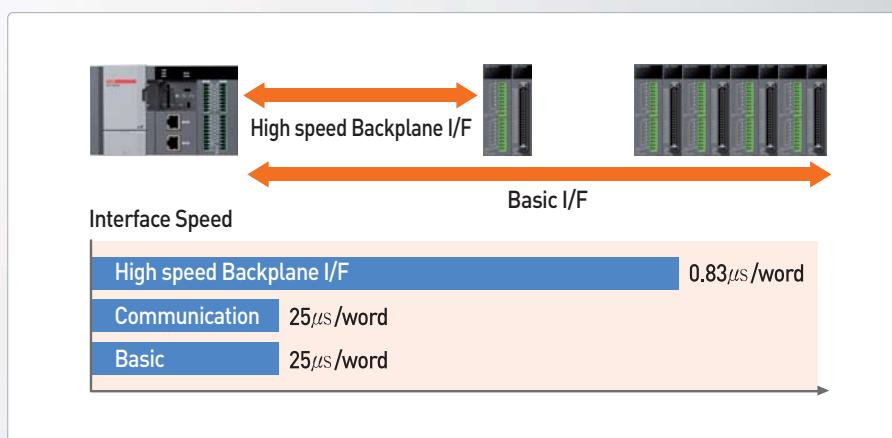


Data Log

- Easy parameter set up for [General save], [Trigger save], [Event save] without instruction
- 16GB of operation data storables
- Additional function
 - SD memory format, FTP link, Diagnosis, Sending email attached with a data log file
 - PLC program upload/download
 - O/S update

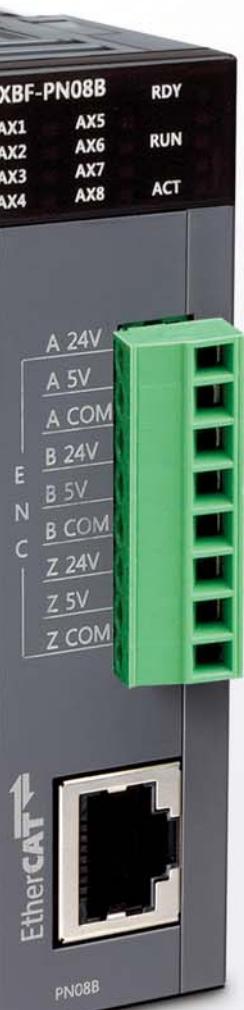


Dual Port Ethernet(XBC/XEC U type)

- 2 ports unmanaged Ethernet switch support
- Cost saving through simple wiring
- FTP server support (Data logging)

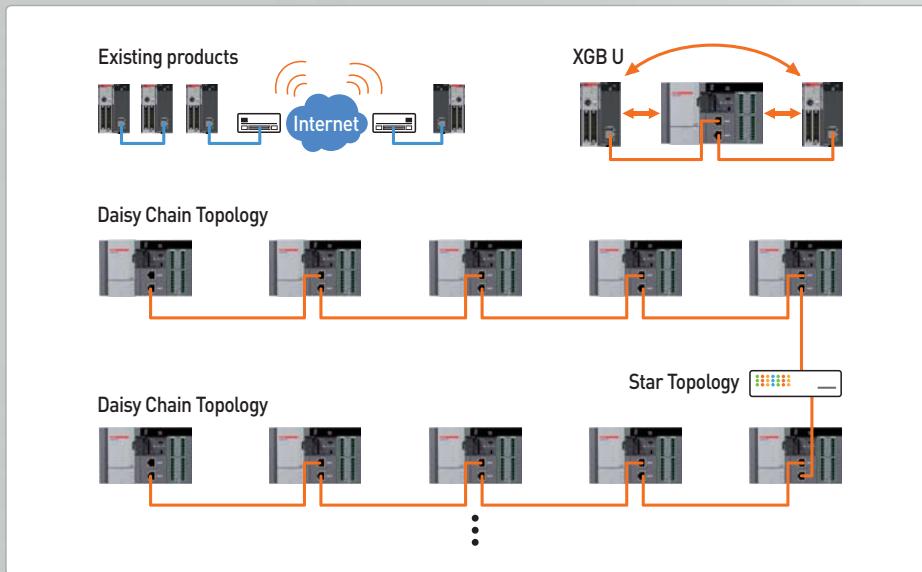

Web Server

- Monitoring of PLC information and data through web browser (PLC basic info., module info., diagnosis, device monitoring, flag monitoring, data log file download, O/S update, ladder program update, etc.)
- Time synchronization by setting basic parameters (SNTP: Simple Network Time Protocol)
- Email service through commercial email (SMTP: Simple Mail Transfer Protocol)

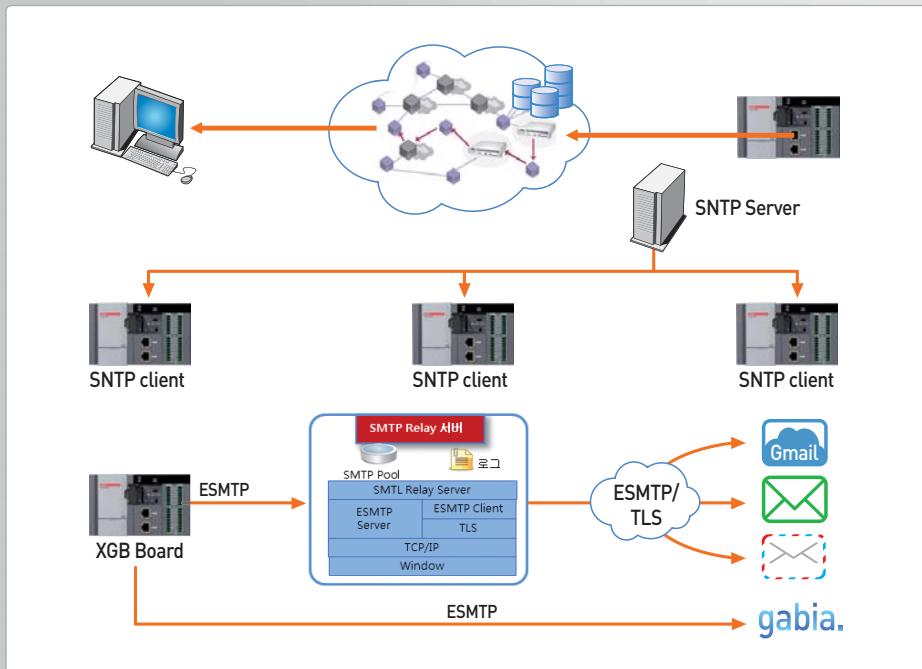

Ultimate Performance Universal IoT User Oriented



U will experience the utmost efficiency for your applications with U's outstanding features

Powerful built-in function

Built-in high speed counter

Phase	XBC/XEC				XBM
	U	H	SU	E	
1 Phase	100kHz(8Ch)	100kHz(4Ch)	100kHz(2Ch)	4kHz	20kHz
		20kHz(4Ch)	20kHz(6Ch)		
	8Ch	8Ch	8Ch	4Ch	4Ch
2 Phase	50kHz(4Ch)	50kHz(4Ch)	50kHz(1Ch)	2kHz	2 multiplication: 10kHz
		10kHz(4Ch)	8kHz(3Ch)		4 multiplication: 8kHz
	4Ch	4Ch	4Ch	2Ch	2Ch



Built-in PID function


- It supports built-in PID control function up to 16 loops.
 - It provides parameter setting using XG5000, convenient loop state monitoring through trend monitor.
 - It can simply get a coefficient value by improved auto-tuning algorithm
 - Control accuracy improvement by using various additional functions such as PWM output, Δ MV, Δ PV, SV Ramp, etc.
 - It provides various control modes such as forward/reverse mixed operation, 2-stage SV PID control, cascade control, etc.
 - Various alarm functions such as MV high/low limit, PV high/low limit, PV variation

Built-in analog I/O function (Available for XBC/XEC-DN32UA type only)

- Built-in analog input 4 channels (voltage/current, 14bit)
- Built-in analog output 4 channels (voltage/current 14bit)

Built-in position control function (Available for XBC/XEC-DN32UP type only)


- Line drive output positioning function with up to 2Mpps 4-axis
- Parameter set up by XG-PM providing operation data edition, divers monitoring and diagnosis functions.

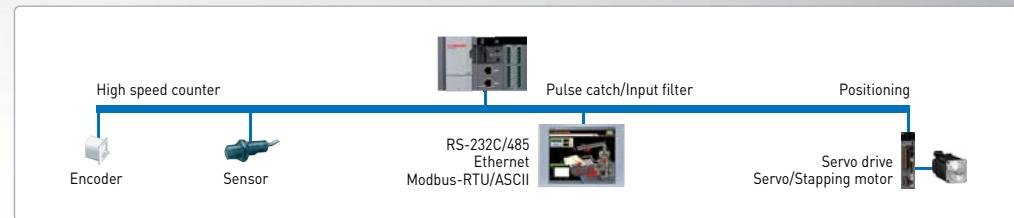

With its high-speed processing and system capability, XGB offers the utmost efficiency for your applications.




XBC/XEC U

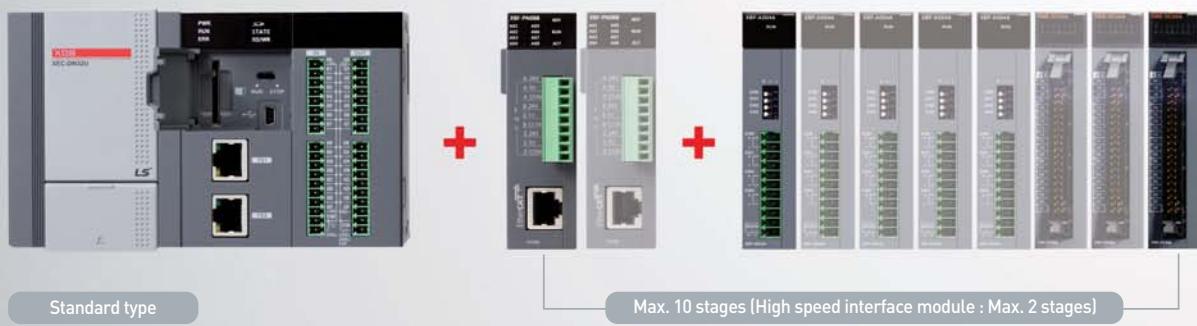


XBC/XEC H



XBC/XEC SU

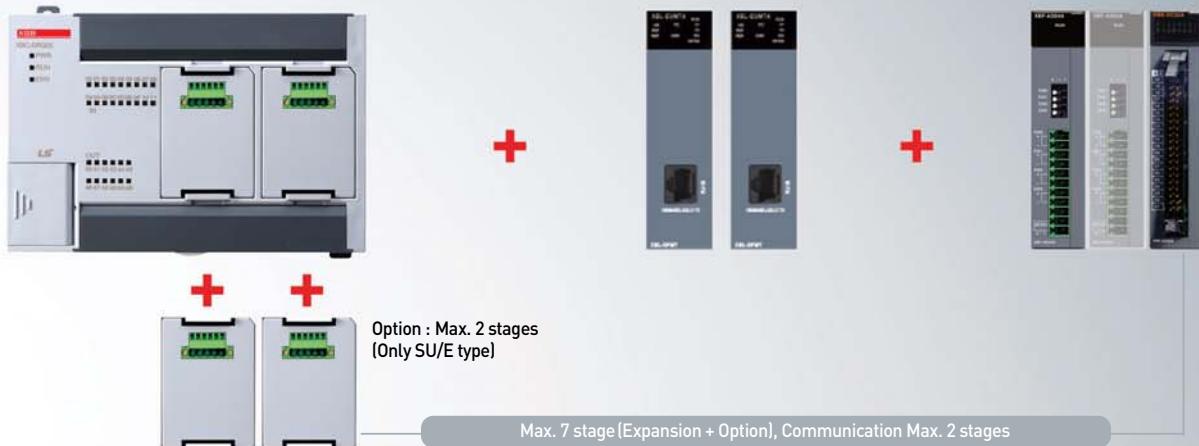


XBC/XEC E

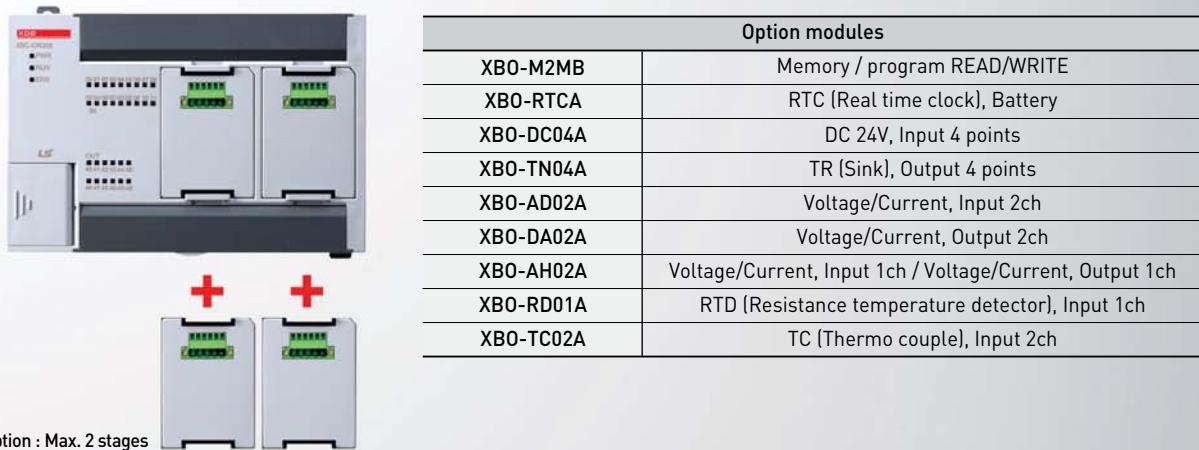



Option : Max. 2 stages

XBM Slim

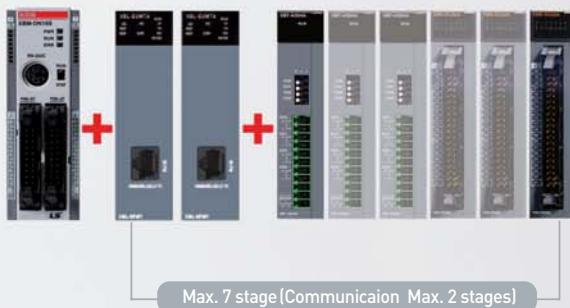

XBM/XEM H, H2, HP

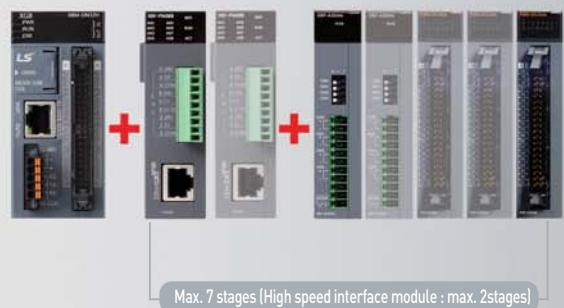



XGB U

Ultimate Performance
Universal IoT
User Oriented

Contents

General specifications	18
Performance specifications	19
Wiring	23





Block type unit
(U, H, SU, E)


Item	Descriptions			Standard	
Ambient temperature	0 ~ 55 °C				
Storage temperature	-25 ~ +70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration			IEC61131-2 10 times each direction (X, Y and Z)	
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	–	0.075mm		
	57 ≤ f ≤ 150Hz	9.8m/s ² (1G)	–		
	Continuous vibration				
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	–	0.035mm		
	57 ≤ f ≤ 150Hz	4.9m/s ² (0.5G)	–		
Shock resistance	<ul style="list-style-type: none"> Peak acceleration: 147m/s² (15g) Pulse waveform: Half-sine, 3times each direction per each axis Duration: 11ms			IEC61131-2	
Noise resistance	Square wave impulse noise	±500 V		LSIS Standard	
	Electrostatic discharge	4kV		IEC61131-2 IEC61000-4-2	
	Radiated electromagnetic field noise	80 ~ 1000MHz, 10V/m		IEC61131-2 IEC61000-4-3	
	Fast transient/Burst noise	Main unit	Expansion module	IEC61131-2 IEC61000-4-4	
Operating ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution level *1	Less than 2				
Cooling	Air-cooling				

*1) Pollution level indicates the degree to which conductive material is generated in the environment where the equipment is used. Pollution level 2 is the condition that only non-conductive pollution occurred but temporary conductivity may be produced due to condensing.

Performance specifications | Block type unit

XBC U

Performance specifications

Item	Specifications						Remark	
	XBC-DN(P)32U	XBC-DR28U	XBC-DN(P)32UA	XBC-DR28UA	XBC-DN(P)32UP	XBC-DR28UP		
Program control method	Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt							
I/O control method	Batch processing by simultaneous scan (Refresh method), Directed by program instruction							
Program language	Ladder Diagram, Instruction List							
Number of instructions	Basic	28						
	Application	677						
Processing speed (Basic instruction)	60ns/step							
Program capacity	32Kstep							
Max. I/O points	352points	348points	352points	348points	352points	348points	Main + 10 expansions	
Data area	P	P00000 ~ P2047F(32,768 point)						
	M	M00000 ~ M2047F(32,768 point)						
	K	K00000 ~ K8191F(131,072 point)						
	L	L00000 ~ L4095F (65,536 point)					Link	
	F	F00000 ~ F2047F (32,768 point)						
	T	100ms, 10ms, 1ms: T0000 ~ T2047 (2,048 point)						
	C	C000 ~ C2047 (2,048 point)					Counter	
	S	S00.00 ~ S127.99						
	D	D00000 ~ D19999(20000word)					Data register	
	U	U00.00 ~ U0B.31 (384 word)						
File register	Z	Z000~Z127 (128 word)						
	N	N0000~N10239(10,240 word)						
	R	RAM area 2 block (R0 ~ R16,383) FLASH area : 4 block (128Kbyte)						
Total program	256							
Initial task	Initial task	1						
	Cyclic task	Max 16						
	I/O task	Max 8						
	Internal device task	Max 16						
	High Speed Counter task	Max 8						
Operation mode	RUN, STOP, DEBUG							
Self-diagnosis function	Detects errors of scan time, memory, I/O and power supply							
Program port	USB 1 channel, Ethernet							
Retain data at power failure	Latch area setting in basic parameter							
Internal consumption current	700mA	990mA	780mA	1,040mA	1,250mA	1,550mA		
Weight	571g	630g	683g	732g	673g	722g		

*1) Auto-MDIX (Automatic medium-dependent interface crossover) :

It is the function to automatically detect whether the cable connected to the Ethernet port is peer-to-peer(straight) or cross cable

XEC U

Performance specifications

Item	Specifications						Remark	
	XEC-DN(P)32U	XEC-DR28U	XEC-DN(P)32UA	XEC-DR28UA	XEC-DN(P)32UP	XEC-DR28UP		
Program control method	Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt							
I/O control method	Batch processing by simultaneous scan (Refresh method), Directed by program instruction							
Program language	Ladder Diagram, Instruction List, SFC, ST							
Number of instructions	Operator	18						
	Basic function	136 + Floating-point Arithmetic Functions						
	Basic function block	43						
	Special function block	Each special module has own special function blocks						
Processing speed (Basic instruction)	60ns/step							
Program memory	384Kbyte							
Max. I/O points	352points	348points	352points	348points	352points	348points	Main + 10 expansions	
Data area	Symbolic variable(A)	64KB (Retain setting available)						
	Input variable(I)	2KB						
	Output variable(Q)	2KB						
	M	32KB (Retain setting available)						
	R	32KB * 2blocks						
	W	64KB					Same area with R	
	F	4KB						
	K	16KB						
	L	8KB						
	U	768 Byte						
	N	20KB						
Flash area	4blocks (128Kbyte)						Using R device	
Timer	No limit in points (Time range: 0.001~ 4,294,967.295)							
Counter	No limit in points (Counter range: 64 bit range)							
Total program	256							
Initial task	Initial task	1						
	Cyclic task	Max 16						
	Initial task	1						
	Cyclic task	Max 16						
	I/O task	Max 8						
	Internal device task	Max 16						
	High Speed Counter task	Max 8						
Operation mode	RUN, STOP, DEBUG							
Self-diagnosis function	Detects errors of scan time, memory, I/O and power supply							
Program port	USB 1 channel							
Retain data at power failure	Latch area setting in basic parameter							
Internal consumption current	700mA	990mA	780mA	1,040mA	1,250mA	1,550mA		
Weight	571g	630g	683g	732g	673g	722g		

Built-in function

Item	Specifications						Remark		
	XBC/XEC-DN(P)32U	XBC/XEC-DR28U	XBC/XEC-DN(P)32UA	XBC/XEC-DR28UA	XBC/XEC-DN(P)32UP	XBC/XEC-DR28UP			
PID control	Control by instruction, auto-tunning, PWM output, Forced output, Operation scan time setting, Antiwindup, Delta MV, PV tracking, Hybrid operation, Cascade operation								
Serial	Protocol	Dedicated protocol, Modbus protocol User defined protocol , LS bus(inverter protocol)				Embedded00 P2P:01			
		RS-232C 1 port and RS-485 1 port							
Ethernet	Transfer spec	Cable: 100Base-TX Speed: 100Mbps Auto-MDIX *1 IEEE 802.3							
	Topology	Line, star							
	Diagnosis	Module information, service condition							
	Protocol	XGT dedicated Modbus TCP/IP user define frame					Embedded01 P2P:02 High-speed link:01		
	Service	P2P, High Speed link, Remote connection							
Datalog	Group	Max 10 group							
	Data set	32 per group							
	Extension	csv file							
	File size	Max 16Mbyte							
	SD memory type	SD,SDHC type(Recommend: SanDisk,Transcend)							
	Memory size	Max 16GB							
	File system	FAT32							
High Speed Counter	Performance	1-phase : 100KHz 8 channels 2-phase : 50KHz 4 channels							
	Counter mode	4 counter modes are supported based on input pulse and INC/DEC method • 1 pulse operation Mode : INC/DEC count by program • 1 pulse operation Mode : INC/DEC count by phase B pulse input • 2 pulse operation Mode : INC/DEC count by input pulse • 2 pulse operation Mode : INC/DEC count by difference of phase							
	Function	• Internal/external preset • Latch counter • Compare output • No. of rotation per unit time							

*1) Auto-MDIX(Automatic medium-dependent interface crossover) : It is the function to automatically detect whether the cable connected to the Ethernet port is peer-to-peer(straight) or cross cable

XEC U

Positioning

Item	Specifications	Remark
Basic Function	No. of control axis: 4axis Control Method:Position, Speed, Speed/Position, Feed Control Control Unit: Pulse ,mm, inch, degree Positioning Data: Each axis can have up to 400 data(Step number:1~400) Operation pattern: End, Keep, Continuous Operation method: Singular, Repeat	Available On UP type
interpolation	2/3/4 axis linear interpolation 2 axis circular interpolation 3 axis helical interpolation	
Positioning	Method: Absolute/Incremental method Address range: 2,147,483,648~2,147,483,647 Speed: Max 2Mpps(1~2,000,000pps) Acc /Dec process: Trapezoid type, S-type	
Homing method	DOG+HOME(Off), DOG+HOME(On), Upper limit + HOME,DOG, High speed, Upper/Lower limit, HOME	
Manual operation	Jog operation, MPG operation, Inchng operation	
Encoder input	Line drive(RS-422A) input 1Channel(Max 200kpps)	

Analog

Item	Specifications	Remark
Analog input	4channels (current/voltage)	Available On UP type
Channels	Voltage: 1~5V, 0~5V, 0~10V, -10~10V, Current: 4~20mA, 0~20mA	
Input Range	Current input or Voltage input can be selected through the external terminal wiring setting.	
Input resistance	1MΩ or more(voltage input), 250 Ω (current input)	
Max.Resolution	1/16000	
Accuracy	0.250mV(1 ~ 5V), 0.3125mV(0 ~ 5V) 0.625mV(0 ~ 10V), 1.250mV(±10V) 1.0 μA (4 ~ 20 mA) 1.25 μA (0 ~ 20 mA)	
Analog output	Voltage 2 channels ,Current 2 channels	Available On UP type
Channels	Voltage: 1~5V, 0~5V, 0~10V, -10~10V, Current: 4~20mA, 0~20mA	
Output Range	Output ranges are set in user program or I/O parameter per each channel.	
Load resistance	1MΩ or more(voltage output), 600 Ω or less(current output)	
Max.Resolution	1/16000	
Accuracy	0.250mV(1 ~ 5V), 0.3125mV(0 ~ 5V) 0.625mV(0 ~ 10V), 1.250mV(±10V) 1.0 μA (4 ~ 20 mA) 1.25 μA (0 ~ 20 mA)	

Wiring | XGB U input/output wiring

Programmable Logic Controller

XBC-DN(P)32U
(16 point input)

Circuit configuration		No.	Contact	No.	Contact	Type
TB1	0	TB1	8	TB1	TB1	
TB2	1	TB2	9	TB2	TB2	
TB3	2	TB3	A	TB3	TB3	
TB4	3	TB4	B	TB4	TB4	
TB5	4	TB5	C	TB5	TB5	
TB6	5	TB6	D	TB6	TB6	
TB7	6	TB7	E	TB7	TB7	
TB8	7	TB8	F	TB8	TB8	
		TB9	COM	TB9	TB9	
		TB10	COM	TB10	TB10	

Terminal block no.

XBC-DN32U
Transistor output
(Sink type)


Circuit configuration		No.	Contact	Type
TB1	0	TB1	0	TB1
TB2	1	TB2	1	TB2
TB3	2	TB3	2	TB3
TB4	3	TB4	3	TB4
TB5	4	TB5	4	TB5
TB6	5	TB6	5	TB6
TB7	6	TB7	6	TB7
TB8	7	TB8	7	TB8
TB1	8	TB1	8	TB1
TB2	9	TB2	9	TB2
TB3	A	TB3	A	TB3
TB4	B	TB4	B	TB4
TB5	C	TB5	C	TB5
TB6	D	TB6	D	TB6
TB7	E	TB7	E	TB7
TB8	F	TB8	F	TB8
TB9	DC12/24V	TB9	DC12/24V	TB9
TB10	COM	TB10	COM	TB10

Internal circuit

DC5V

DC12/24V

Terminal number




XBC/XEC H

High Performance

Contents

Performance specifications	26
Wiring	27



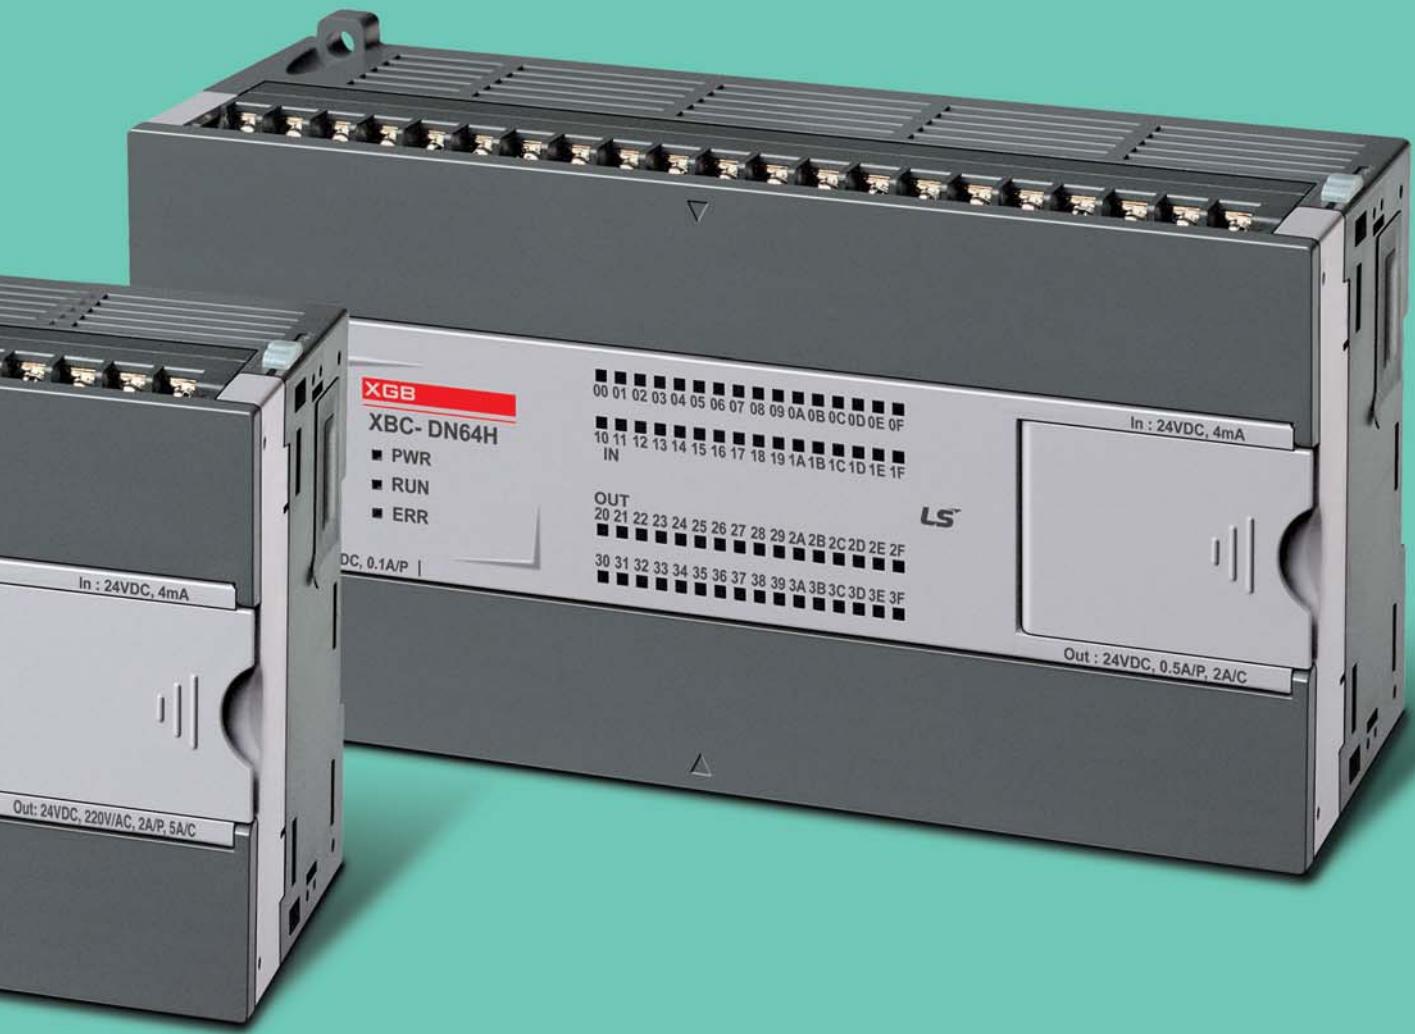

High performance type

Performance specifications

Item	XBC/XEC-DR32H XBC-DR32H/DC ^{*1} XEC-DR32H/DI	XBC/XEC-DN32H XEC-DP32H ^{*1} XBC-DN32H/DC	XBC/XEC-DR64H XBC-DR64H/DC ^{*1} XEC-DR64H/DI	XBC/XEC-DN64H XEC-DP64H ^{*1} XBC-DN64H/DC		
Control method	Repetitive, cyclic, interrupt, constant scan					
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction					
Programming language	Ladder diagram or IEC standard (LD, SFC, ST) ^{*1}					
Processing speed	83 ns / Step					
Program capacity	15Kstep (IEC type: 200KB)					
Main unit I/O points	32 (Input:16, Output:16)	32 (Input:16, Output:16)	64 (Input: 32, Output: 32)	64 (Input: 32, Output: 32)		
Max. I/O points (Main + Expansion 10 stages)	352 points		384 points			
Total program	128					
Operation mode	RUN, STOP, DEBUG					
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.					
Program port	USB (Rev 1.1), RS-232C 1 channel (Loader)					
Retain data at power failure	Latch area setting at basic parameter					
Built-in functions	RS-232C / RS-485(2 ch), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning, RTC					
Data memory						
XBC		XECA (IEC type)				
P	P0000 ~ P1023F (16,384 points)	Symbolic variable	A	32KB (Max. 16KB retain setting available)		
M	M0000 ~ M1023F (16,384 points)	Input variable	I	2KB (%IX 15.15.63)		
K	K0000 ~ K4095F (65,536 points)	Output variable	Q	2KB (%QX 15.15.63)		
L	L0000 ~ L2047F (32,768 points)	Direct variable	M	16KB (Max. 8KB retain setting available)		
F	F0000 ~ F1023F (16,384 points)		R	20KB (1 block)		
T	100ms, 10ms, 1ms: T0000 ~ T1023 (1,024)(Adjustable by parameter setting)		W	20KB		
C	C0000 ~ C1023 (1,024)		F	2KB		
S	S00.00 ~ S127.99		K	8KB		
D	D0000 ~ D10239 (10,240 word)	Flag variable	L	4KB		
U	U00.00 ~ U0A.31 (Analog data refresh area: 352 word)		N	10KB		
Z	Z000 ~ Z127 (128 word)		U	1KB		
N	N000 ~ N5119 (5,120 word)		Flash area	R 20KB (2 blocks)		

*1) XEC is IEC standard language programming.

Wiring | XBC/XEC H input/output wiring

XBC/XEC-DN(R)32H
XBC/XEC-DN/DR/DP32H

Input wiring
(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type																																																																										
<p>Terminal block no.</p>	TB2	485+	TB1	RX	<table border="1"> <tr><td>⊕</td><td></td><td>TB1</td></tr> <tr><td>RX</td><td></td><td>TB3</td></tr> <tr><td>TB2</td><td>485-</td><td>TB5</td></tr> <tr><td>TB3</td><td></td><td>TB7</td></tr> <tr><td>TB4</td><td>485-</td><td>TB9</td></tr> <tr><td>TB5</td><td></td><td>TB1</td></tr> <tr><td>TB6</td><td>00</td><td>TB1</td></tr> <tr><td>TB7</td><td>01</td><td>TB1</td></tr> <tr><td>TB8</td><td>02</td><td>TB1</td></tr> <tr><td>TB9</td><td>03</td><td>TB1</td></tr> <tr><td>TB10</td><td>04</td><td>TB1</td></tr> <tr><td>TB11</td><td>05</td><td>TB1</td></tr> <tr><td>TB12</td><td>06</td><td>TB1</td></tr> <tr><td>TB13</td><td>07</td><td>TB1</td></tr> <tr><td>TB14</td><td>08</td><td>TB1</td></tr> <tr><td>TB15</td><td>09</td><td>TB1</td></tr> <tr><td>TB16</td><td>0A</td><td>TB1</td></tr> <tr><td>TB17</td><td>0B</td><td>TB1</td></tr> <tr><td>TB18</td><td>0C</td><td>TB1</td></tr> <tr><td>TB19</td><td>0D</td><td>TB1</td></tr> <tr><td>TB20</td><td>0E</td><td>TB2</td></tr> <tr><td>TB21</td><td>0F</td><td>TB2</td></tr> <tr><td>TB22</td><td>COM</td><td>TB2</td></tr> <tr><td>TB23</td><td>24G</td><td>TB2</td></tr> <tr><td>TB24</td><td>24V</td><td>⊕</td></tr> </table>	⊕		TB1	RX		TB3	TB2	485-	TB5	TB3		TB7	TB4	485-	TB9	TB5		TB1	TB6	00	TB1	TB7	01	TB1	TB8	02	TB1	TB9	03	TB1	TB10	04	TB1	TB11	05	TB1	TB12	06	TB1	TB13	07	TB1	TB14	08	TB1	TB15	09	TB1	TB16	0A	TB1	TB17	0B	TB1	TB18	0C	TB1	TB19	0D	TB1	TB20	0E	TB2	TB21	0F	TB2	TB22	COM	TB2	TB23	24G	TB2	TB24	24V	⊕
⊕		TB1																																																																														
RX		TB3																																																																														
TB2	485-	TB5																																																																														
TB3		TB7																																																																														
TB4	485-	TB9																																																																														
TB5		TB1																																																																														
TB6	00	TB1																																																																														
TB7	01	TB1																																																																														
TB8	02	TB1																																																																														
TB9	03	TB1																																																																														
TB10	04	TB1																																																																														
TB11	05	TB1																																																																														
TB12	06	TB1																																																																														
TB13	07	TB1																																																																														
TB14	08	TB1																																																																														
TB15	09	TB1																																																																														
TB16	0A	TB1																																																																														
TB17	0B	TB1																																																																														
TB18	0C	TB1																																																																														
TB19	0D	TB1																																																																														
TB20	0E	TB2																																																																														
TB21	0F	TB2																																																																														
TB22	COM	TB2																																																																														
TB23	24G	TB2																																																																														
TB24	24V	⊕																																																																														
TB4	485-	TB3	TX																																																																													
TB6	00	TB5	SG																																																																													
TB8	02	TB7	01																																																																													
TB10	04	TB9	03																																																																													
TB12	06	TB1	05																																																																													
TB14	08	TB1	07																																																																													
TB16	0A	TB1	09																																																																													
TB18	0C	TB1	0B																																																																													
TB20	0E	TB1	0D																																																																													
TB22	COM	TB2	0F																																																																													
TB23	24G	TB2	24V																																																																													
TB24	24V	⊕	⊕																																																																													

XBC/XEC-DR32H
Relay output wiring type

Circuit configuration		No.	Contact	No.	Contact	Type																																									
<p>Terminal block no.</p>	TB2	PE	TB1	Power	<table border="1"> <tr><td>⊕</td><td></td><td>TB1</td></tr> <tr><td>PE</td><td>AC100-240V</td><td>TB3</td></tr> <tr><td>TB2</td><td>NC</td><td>TB5</td></tr> <tr><td>TB4</td><td></td><td>TB7</td></tr> <tr><td>TB6</td><td>21</td><td>TB9</td></tr> <tr><td>TB8</td><td>23</td><td>TB11</td></tr> <tr><td>TB10</td><td>24</td><td>TB13</td></tr> <tr><td>TB12</td><td>26</td><td>TB15</td></tr> <tr><td>TB14</td><td>COM1</td><td>TB17</td></tr> <tr><td>TB16</td><td>29</td><td>TB19</td></tr> <tr><td>TB18</td><td>28</td><td>TB21</td></tr> <tr><td>TB20</td><td>2C</td><td>TB23</td></tr> <tr><td>TB22</td><td>2E</td><td>TB25</td></tr> <tr><td>TB24</td><td>COM3</td><td>⊕</td></tr> </table>	⊕		TB1	PE	AC100-240V	TB3	TB2	NC	TB5	TB4		TB7	TB6	21	TB9	TB8	23	TB11	TB10	24	TB13	TB12	26	TB15	TB14	COM1	TB17	TB16	29	TB19	TB18	28	TB21	TB20	2C	TB23	TB22	2E	TB25	TB24	COM3	⊕
⊕		TB1																																													
PE	AC100-240V	TB3																																													
TB2	NC	TB5																																													
TB4		TB7																																													
TB6	21	TB9																																													
TB8	23	TB11																																													
TB10	24	TB13																																													
TB12	26	TB15																																													
TB14	COM1	TB17																																													
TB16	29	TB19																																													
TB18	28	TB21																																													
TB20	2C	TB23																																													
TB22	2E	TB25																																													
TB24	COM3	⊕																																													
TB3	NC	TB2	20																																												
TB5	21	TB4	22																																												
TB7	23	TB6	24																																												
TB9	25	TB8	26																																												
TB11	27	TB10	28																																												
TB13	29	TB12	2A																																												
TB15	2B	TB14	2C																																												
TB17	2D	TB16	2E																																												
TB19	2F	TB20	2G																																												
TB21	2H	TB22	2I																																												
TB23	2J	TB24	2K																																												

XBC/XEC-DN32H
Transistor output wiring
(sink type)


Circuit configuration		No.	Contact	No.	Contact	Type																																									
<p>Terminal block no.</p>	TB2	PE	TB1	Power	<table border="1"> <tr><td>⊕</td><td></td><td>TB1</td></tr> <tr><td>PE</td><td>AC100-240V</td><td>TB3</td></tr> <tr><td>TB2</td><td>DC12/24V</td><td>TB5</td></tr> <tr><td>TB4</td><td></td><td>TB7</td></tr> <tr><td>TB6</td><td>21</td><td>TB9</td></tr> <tr><td>TB8</td><td>23</td><td>TB11</td></tr> <tr><td>TB10</td><td>24</td><td>TB13</td></tr> <tr><td>TB12</td><td>26</td><td>TB15</td></tr> <tr><td>TB14</td><td>COM1</td><td>TB17</td></tr> <tr><td>TB16</td><td>29</td><td>TB19</td></tr> <tr><td>TB18</td><td>28</td><td>TB21</td></tr> <tr><td>TB20</td><td>2C</td><td>TB23</td></tr> <tr><td>TB22</td><td>2E</td><td>TB25</td></tr> <tr><td>TB24</td><td>COM3</td><td>⊕</td></tr> </table>	⊕		TB1	PE	AC100-240V	TB3	TB2	DC12/24V	TB5	TB4		TB7	TB6	21	TB9	TB8	23	TB11	TB10	24	TB13	TB12	26	TB15	TB14	COM1	TB17	TB16	29	TB19	TB18	28	TB21	TB20	2C	TB23	TB22	2E	TB25	TB24	COM3	⊕
⊕		TB1																																													
PE	AC100-240V	TB3																																													
TB2	DC12/24V	TB5																																													
TB4		TB7																																													
TB6	21	TB9																																													
TB8	23	TB11																																													
TB10	24	TB13																																													
TB12	26	TB15																																													
TB14	COM1	TB17																																													
TB16	29	TB19																																													
TB18	28	TB21																																													
TB20	2C	TB23																																													
TB22	2E	TB25																																													
TB24	COM3	⊕																																													
TB3	DC12/24V	TB2	20																																												
TB5	21	TB4	22																																												
TB7	23	TB6	24																																												
TB9	25	TB8	26																																												
TB11	27	TB10	28																																												
TB13	29	TB12	2A																																												
TB15	2B	TB14	2C																																												
TB17	2D	TB16	2E																																												
TB19	2F	TB20	2G																																												
TB21	2H	TB22	2I																																												
TB23	2J	TB24	2K																																												

* XBC input : P00~P1F, XEC input : I00~I31 * XBC output : P21~P3F, XEC output : Q00~Q31

XEC-DP32H


Transistor output wiring
(source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1		TB3	Power	
TB4	DC12/24V	TB2	PE	TB3	AC100~240V	TB1
TB6	21	TB4	DC12/24V	TB5	00	TB3
TB8	23	TB6	01	TB7	02	TB7
TB10	24	TB8	03	TB9	COM0	TB9
TB12	26	TB10	04	TB11	05	TB11
TB14	COM1	TB12	06	TB13	07	TB13
TB16	29	TB14	COM1	TB15	08	TB15
TB18	28	TB16	09	TB17	10	TB17
TB20	2C	TB18	11	TB19	COM2	TB19
TB22	2E	TB20	12	TB21	13	TB21
TB24	COM3	TB22	14	TB23	15	TB23
		TB24	2F			

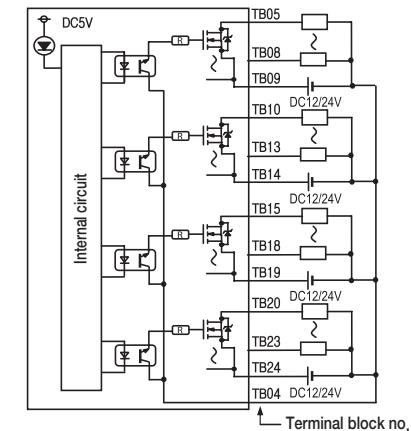**XBC-DN(R)64H****XEC-DN/DR/DP64H**


Input wiring
(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	485+	TB1	RX	TB3		
TB4	485-	TB3	TX	TB5		
TB6	00	TB5	SG	TB7	01	
TB8	02	TB7	01	TB9	03	
TB10	04	TB9	03	TB11	05	
TB12	06	TB11	05	TB13	07	
TB14	08	TB13	07	TB15	09	
TB16	0A	TB15	09	TB17	0B	
TB18	0O	TB17	0B	TB19	0D	
TB20	OE	TB19	0D	TB21	OF	
TB22	COM0	TB21	OF	TB23	MC	
TB24	10	TB23	MC	TB25	11	
TB26	12	TB25	11	TB27	13	
TB28	14	TB27	13	TB29	15	
TB30	16	TB29	15	TB31	17	
TB32	18	TB31	17	TB33	19	
TB34	1A	TB33	19	TB35	1B	
TB36	1C	TB35	1B	TB37	1D	
TB38	1E	TB37	1D	TB39	1F	
TB40	COM1	TB39	1F	TB41	24G	
TB42	24V	TB41	24G			

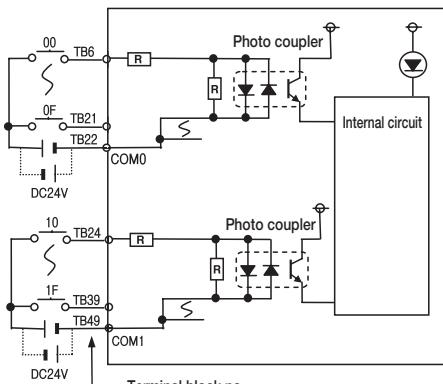**XBC-DR60H****XEC-DR64H**

Relay output wiring


Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1		TB3	Power	
TB4	NC	TB2	PE	TB3	AC100~240V	TB1
TB6	21	TB4	NC	TB5	00	TB3
TB8	23	TB6	01	TB7	02	TB7
TB10	24	TB8	03	TB9	COM0	TB9
TB12	26	TB10	04	TB11	05	TB11
TB14	COM1	TB12	06	TB13	07	TB13
TB16	29	TB14	COM1	TB15	08	TB15
TB18	2B	TB16	09	TB17	2A	TB17
TB20	2C	TB18	10	TB19	COM2	TB19
TB22	2E	TB20	11	TB21	2D	TB21
TB24	COM2	TB22	12	TB23	2F	TB23
TB26	31	TB24	COM2	TB25	30	TB25
TB28	33	TB26	31	TB27	32	TB27
TB30	35	TB28	33	TB29	34	TB29
TB32	37	TB30	35	TB31	36	TB31
TB34	38	TB32	37	TB33	COM4	TB33
TB36	3A	TB34	38	TB35	39	TB35
TB38	3C	TB36	3A	TB37	38	TB37
TB40	3E	TB38	3C	TB39	3D	TB39
TB42	COM5	TB40	3E	TB41	3F	TB41

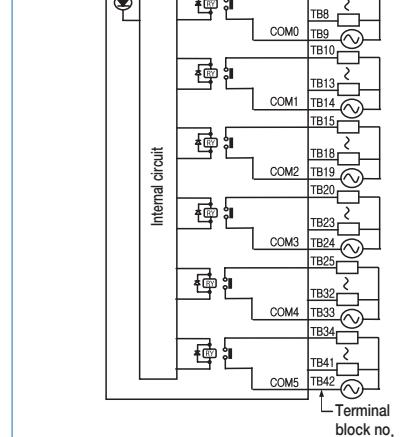

* XBC input : P00~P1F, XEC input : I00~I31 * XBC output : P21~P3F, XEC output : Q00~Q31

XBC-DP64HTransistor output wiring
(sink type)


Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1				
TB4	DC12/24V	TB3	Power			
TB6	21	TB5	20			
TB8	23	TB7	22			
TB10	24	TB9	COM0			
TB12	26	TB11	25			
TB14	COM1	TB13	27			
TB16	29	TB15	28			
TB18	2B	TB17	2A			
TB20	2C	TB19	COM2			
TB22	2E	TB21	2D			
TB24	COM2	TB23	2F			
TB26	31	TB25	30			
TB28	33	TB27	32			
TB30	35	TB29	34			
TB32	37	TB31	36			
TB34	38	TB33	COM4			
TB36	3A	TB35	39			
TB38	3C	TB37	38			
TB40	3E	TB39	3D			
TB42	COM5	TB41	3F			

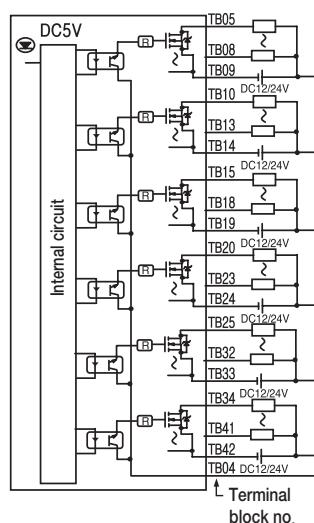**XBC-DP64H**Transistor output wiring
(source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	Power			
TB4	DC12/24V	TB3				
TB6	21	TB5	20			
TB8	23	TB7	22			
TB10	24	TB9	COM0			
TB12	26	TB11	25			
TB14	COM1	TB13	27			
TB16	29	TB15	28			
TB18	2B	TB17	2A			
TB20	2C	TB19	COM2			
TB22	2E	TB21	2D			
TB24	COM2	TB23	2F			
TB26	31	TB25	30			
TB28	33	TB27	32			
TB30	35	TB29	34			
TB32	37	TB31	36			
TB34	38	TB33	COM4			
TB36	3A	TB35	39			
TB38	3C	TB37	38			
TB40	3E	TB39	3D			
TB42	COM5	TB41	3F			

* XBC input : P00~P1F, XEC input : I00~I31

* XBC output : P21~P3F, XEC output : Q00~Q31



XBC/XEC SU

Standard

Contents

Performance specifications	32
Wiring	33





Standard type

Performance specifications

Item	XBC/XEC-DN20SU	XBC/XEC-DN30SU	XBC/XEC-DN40SU	XBC/XEC-DN60SU	
Control method	Repetitive, cyclic, interrupt, constant scan				
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction				
Programming language	Ladder diagram, Instruction List				
Processing speed	94 ns / Step				
Program capacity	15Kstep / 200KB				
Main unit I/O points	20 (Input:12, Output:8)	30 (Input:18, Output:12)	40 (Input:24, Output:16)	60 (Input:36, Output:24)	
Max. I/O points (Main + Expansion 7 stages)	244 points	254 points	264 points	284 points	
Total program	128				
Operation mode	RUN, STOP, DEBUG				
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.				
Program port	RS-232C 1 channel (Loader), USB 1 channel (U-type model)				
Retain data at power failure	Latch area setting at basic parameter				
Built-in functions	RS-232C / RS-485(2 ch), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning				
Data memory					
XBC			XEC		
Data area	P	P0000 ~ P1023F (16,384 points)	Symbolic variable	A	16KB (Max. 16KB retain setting available)
	M	M0000 ~ M1023F (16,384 points)		I	2KB (%IX 15.15.63)
	K	K0000 ~ K4095F (65,536 points)	Input variable	Q	2KB (%QX 15.15.63)
	L	L0000 ~ L2047F (32,768 points)	Output variable	M	8KB (Max. retain setting available)
	F	F0000 ~ F1023F (16,384 points)	Direct variable	R	20KB (1 block)
	T	100ms, 10ms, 1ms: T0000 ~ T1023 (1,024) (Adjustable by parameter setting)		W	20KB
	C	C0000 ~ C1023 (1,024)	Flag variable	F	2KB
	S	S00.00 ~ S127.99		K	8KB
	D	D0000 ~ D10239 (10,240 word)		L	4KB
	U	U00.00 ~ U0A.31 (Analog data refresh area: 352 word)		U	1KB
	Z	Z000 ~ Z127 (128 word)	Flash area	20KB (2 block)	
	R	N0000 ~ N10236 (10,240 word)			

*Some products are due in market soon.

Wiring | XBC/XEC SU input/output wiring

XBC/XEC-DR20SU
XBC/XEC-DN20SU
XBC/XEC-DP20SU
Input wiring
(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
<p>Terminal block no.</p>	TB2	485+	TB1	RX	TB1	
	TB4	485-	TB3	TX	TB3	
	TB6	00	TB5	SG	TB5	
	TB8	02	TB7	01	TB7	
	TB10	04	TB9	03	TB9	
	TB12	06	TB11	05	TB11	
	TB14	08	TB13	07	TB13	
	TB16	0A	TB15	09	TB15	
	TB18	NC	TB17	0B	TB17	
	TB20	NC	TB19	NC	TB19	
	TB22	NC	TB20	NC	TB21	
	TB24	COM	TB21	NC	TB23	
			TB23	NC		

XBC/XEC-DR20SU
Relay output wiring

Circuit configuration		No.	Contact	No.	Contact	Type
<p>Internal circuit</p> <p>Terminal block no.</p>	TB2	PE	TB1	AC100	TB1	
	TB3	-240V				
	TB4	COM0	TB3	-240V	TB3	
	TB5	COM1	TB4	40	TB5	
	TB6	COM2	TB5	41	TB7	
	TB7	COM3	TB6	42	TB9	
	TB8	43	TB7	41	TB11	
	TB9	44	TB8	42	TB13	
	TB10	45	TB9	44	TB15	
	TB11	46	TB10	43	TB17	
	TB12	47	TB11	46	TB19	
	TB13	NC	TB12	44	TB21	
	TB14	NC	TB13	44	TB23	
	TB15	NC	TB14	45		
	TB16	NC	TB15	46		
	TB17	NC	TB16	47		
	TB18	NC	TB17	NC		
	TB19	NC	TB18	NC		
	TB20	NC	TB19	NC		
	TB21	NC	TB20	NC		
	TB22	NC	TB21	NC		
	TB23	24V	TB22	NC		
	TB24	24G	TB23	24V		


XBC/XEC-DN20SU
Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	No.	Contact	Type
<p>Internal circuit</p> <p>Terminal block no.</p>	TB2	PE	TB1	AC100	TB1	
	TB3	-240V				
	TB4	COM0	TB2	PE	TB3	
	TB5	COM1	TB3	-240V	TB5	
	TB6	COM2	TB4	40	TB7	
	TB7	P	TB5	41	TB9	
	TB8	42	TB6	42	TB11	
	TB9	44	TB7	41	TB13	
	TB10	45	TB8	42	TB15	
	TB11	46	TB9	44	TB17	
	TB12	47	TB10	43	TB19	
	TB13	NC	TB11	46	TB21	
	TB14	NC	TB12	44	TB23	
	TB15	NC	TB13	44		
	TB16	NC	TB14	45		
	TB17	NC	TB15	46		
	TB18	NC	TB16	47		
	TB19	NC	TB17	NC		
	TB20	NC	TB18	NC		
	TB21	NC	TB19	NC		
	TB22	NC	TB20	NC		
	TB23	24V	TB21	NC		
	TB24	24G	TB22	NC		

* XBC input : P00~P23, XEC input : I00~I35 * XBC output : P40~P57, XEC output : Q00~Q23

XBC/XEC-DP32H

Transistor output wiring (source type)

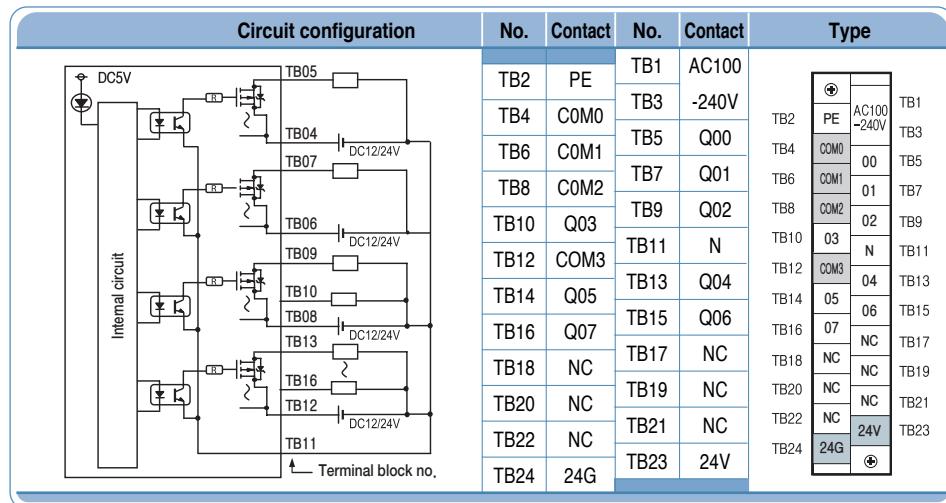


XBC/XEC-DR30SU

XBC/XEC-DN30SU


XBC/XEC-DP30SU

Input wiring (sink/source type)

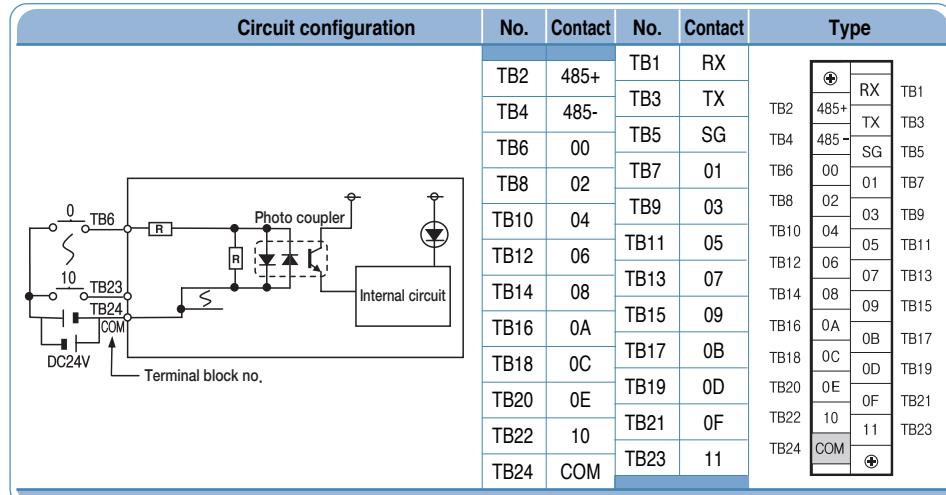

XBC/XEC-DR30SU


Relay output wiring

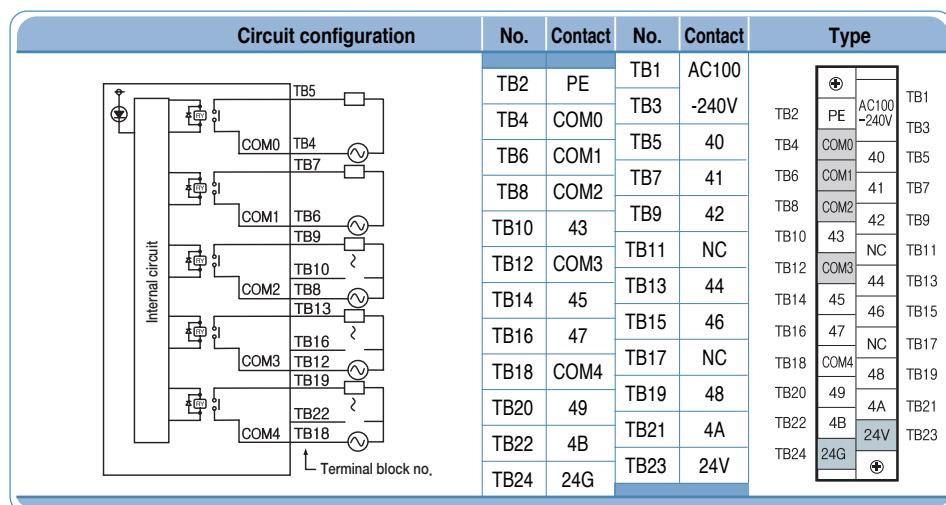

* XBC input : P00~P23, XEC input : I00~I35 * XBC output : P40~P57, XEC output : Q00~Q23


XBC/XEC-DN30SU

Transistor output wiring (sink type)

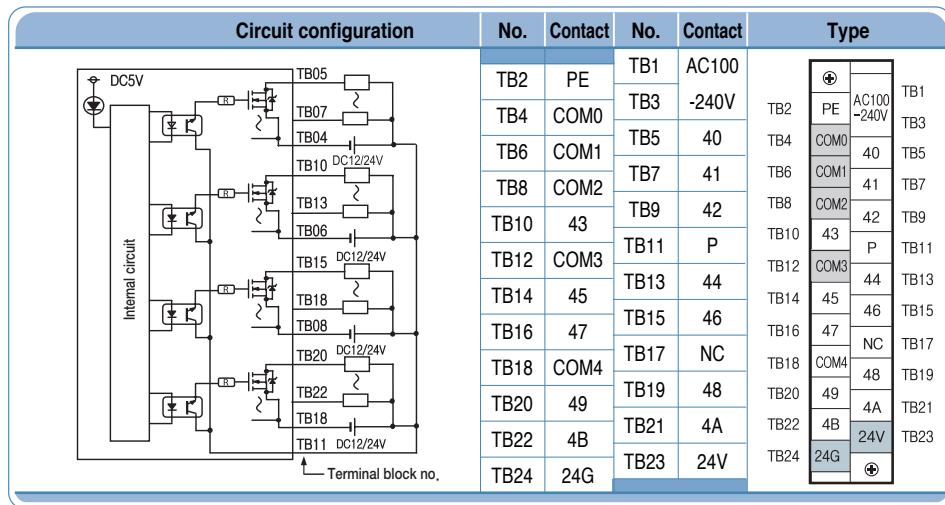

XBC/XEC-DP30SU

Transistor output wiring
(source type)

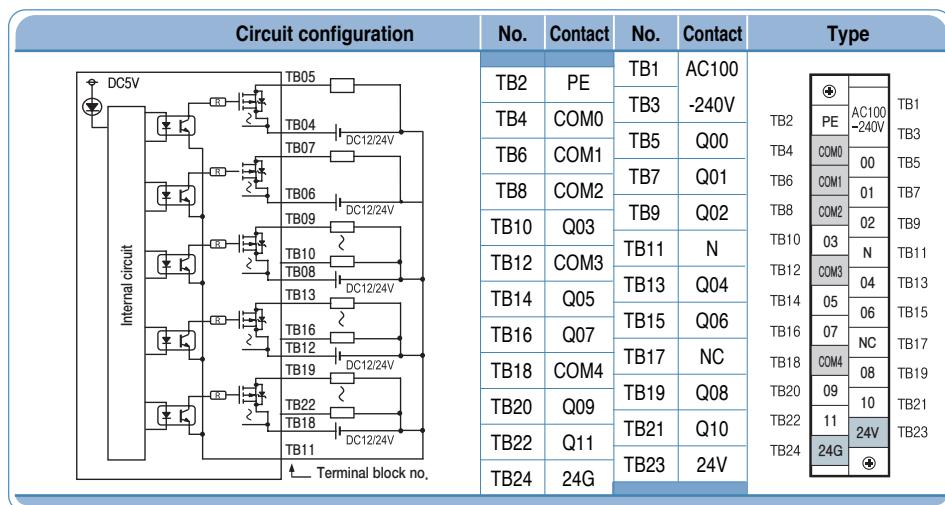


XBC/XEC-DR40SU

XBC/XEC-DN40SU


XBC/XEC-DP40SU

DC24 Input wiring (sink/source type)

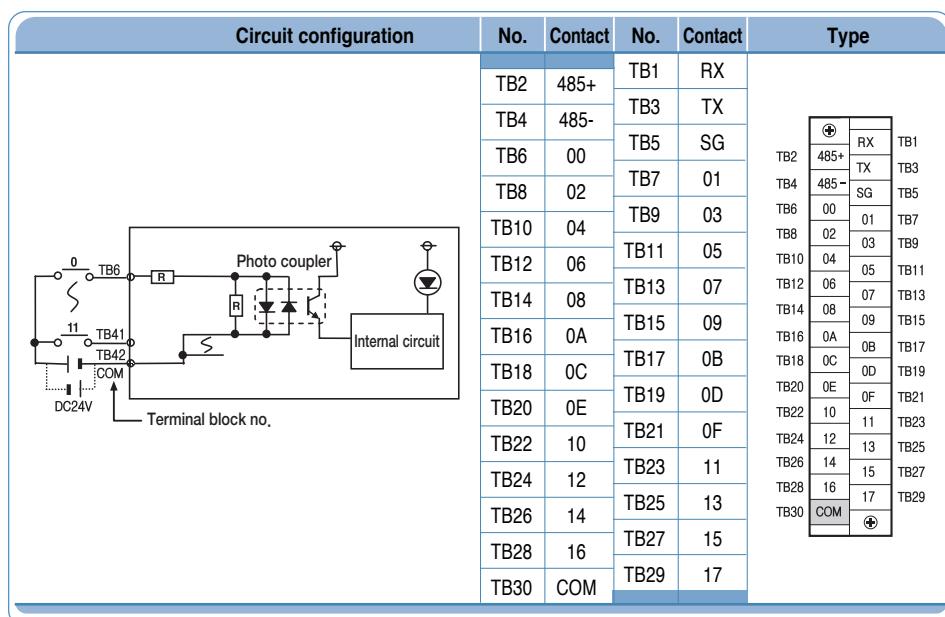


* XBC input : P00~P23, XEC input : I00~I35 * XBC output : P40~P57, XEC output : Q00~Q23

XBC/XEC-DR40SU Relay output wiring

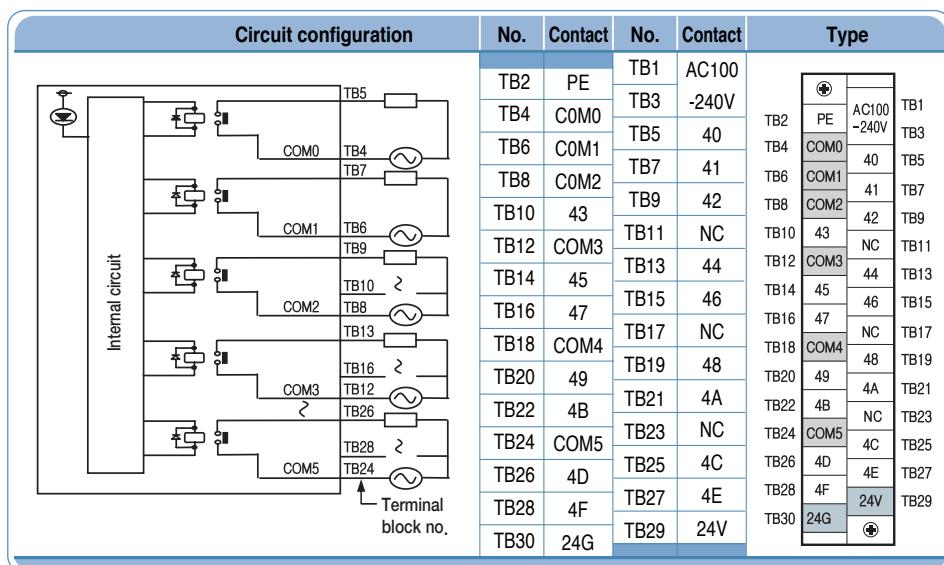


XBC/XEC-DN40SU

Transistor output wiring (sink type)

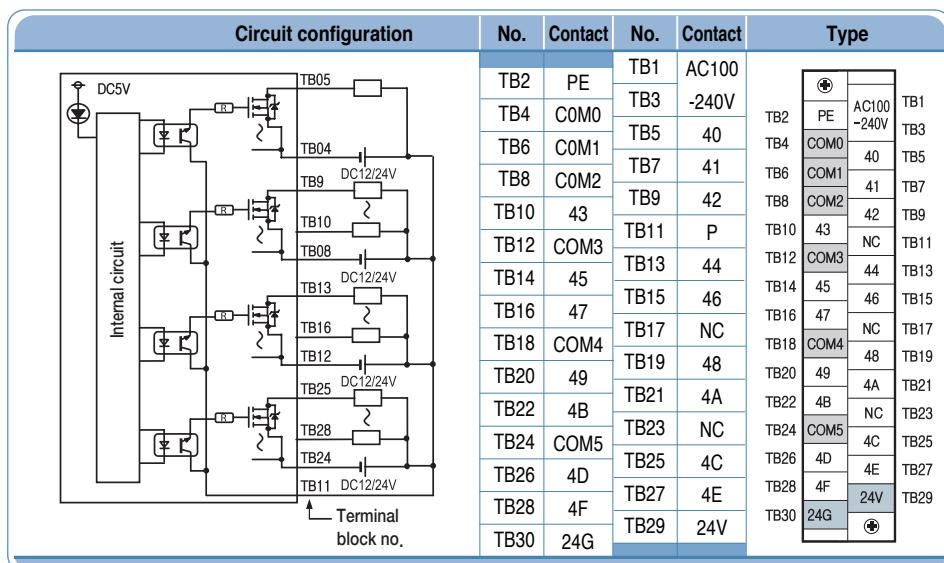

XBC/XEC-DP40SU

Transistor output wiring (source type)

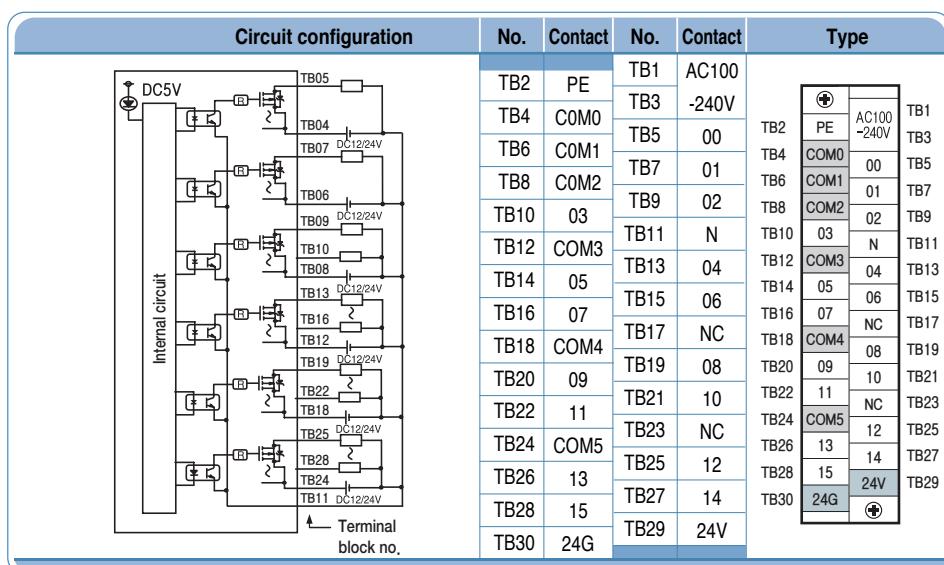

* XBC input : P00~P23, XEC input : I00~I35

* XBC output : P40~P57, XEC output : Q00~Q23


XBC/XEC-DR60SU

XBC/XEC-DN60SU

XBC/XEC-DP60SU

Input wiring
(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	485+	TB1	RX			
TB3		TB2				
TB4	485-	TB3	TX			
TB5		TB4				
TB6	00	TB5	SG			
TB7		TB6				
TB8	02	TB7	01			
TB9		TB8				
TB10	04	TB9	03			
TB11		TB10				
TB12	06	TB11	05			
TB13		TB12				
TB14	08	TB13	07			
TB15		TB14				
TB16	0A	TB15	09			
TB17		TB16				
TB18	0C	TB17	0B			
TB19		TB18				
TB20	0E	TB19	0D			
TB21		TB20				
TB22	10	TB21	0F			
TB23		TB22				
TB24	12	TB23	11			
TB25		TB24				
TB26	14	TB25	13			
TB27		TB26				
TB28	16	TB27	15			
TB29		TB28				
TB30	18	TB29	17			
TB31		TB30				
TB32	1A	TB31	19			
TB33		TB32				
TB34	1C	TB33	1B			
TB35		TB34				
TB36	1E	TB35	1D			
TB37		TB36				
TB38	20	TB37	1F			
TB39		TB38				
TB40	22	TB39	21			
TB41		TB40				
TB42	COM	TB41	23			

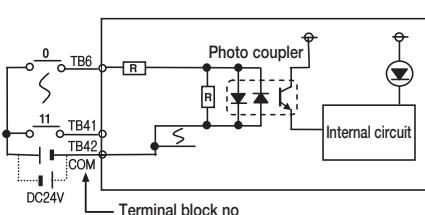

XBC/XEC-DR60SU

Relay output wiring


Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100			
TB3		TB2	-240V			
TB4	COM0	TB3				
TB5		TB4	40			
TB6	C0M1	TB5				
TB7		TB6				
TB8	C0M2	TB7	41			
TB9		TB8				
TB10	43	TB9	42			
TB11		TB10				
TB12	COM3	TB11	NC			
TB13		TB12				
TB14	45	TB13	44			
TB15		TB14				
TB16	47	TB15	46			
TB17		TB16				
TB18	COM4	TB17	NC			
TB19		TB18				
TB20	49	TB19	48			
TB21		TB20				
TB22	4B	TB21	4A			
TB23		TB22				
TB24	COM5	TB23	NC			
TB25		TB24				
TB26	4D	TB25	4C			
TB27		TB26				
TB28	4F	TB27	4E			
TB29		TB28				
TB30	COM6	TB29	NC			
TB31		TB30				
TB32	51	TB31	50			
TB33		TB32				
TB34	53	TB33	52			
TB35		TB34				
TB36	COM7	TB35	NC			
TB37		TB36				
TB38	55	TB37	54			
TB39		TB38				
TB40	57	TB39	56			
TB41		TB40				
TB42	24G	TB41	24V			

* XBC input : P00~P23, XEC input : I00~I35 * XBC output : P40~P57, XEC output : Q00~Q23

XBC/XEC-DN60SU

Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100			
TB4	COM0	TB3	-240V			
TB6	COM1	TB5	40			
TB8	COM2	TB7	41			
TB10	43	TB9	42			
TB12	COM3	TB11	P			
TB14	45	TB13	44			
TB16	47	TB15	46			
TB18	COM4	TB17	NC			
TB20	49	TB19	48			
TB22	4B	TB21	4A			
TB24	COM5	TB23	NC			
TB26	4D	TB25	4C			
TB28	4F	TB27	4E			
TB30	COM6	TB29	NC			
TB32	51	TB31	50			
TB34	53	TB33	52			
TB36	COM7	TB35	NC			
TB38	55	TB37	54			
TB40	57	TB39	56			
TB42	24G	TB41	24V			

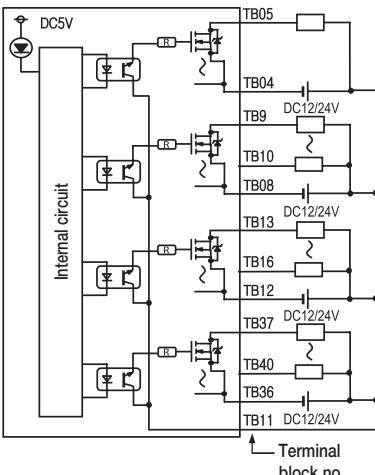

TB2	PE	AC100	TB1
TB4	COM0	-240V	TB3
TB6	COM1	40	TB5
TB8	COM2	41	TB7
TB10	43	42	TB9
TB12	COM3	P	TB11
TB14	45	44	TB13
TB16	47	46	TB15
TB18	COM4	NC	TB17
TB20	49	48	TB19
TB22	4B	4A	TB21
TB24	COM5	NC	TB23
TB26	4D	4C	TB25
TB28	4F	4E	TB27
TB30	COM6	NC	TB29
TB32	51	50	TB31
TB34	53	52	TB33
TB36	COM7	NC	TB35
TB38	55	54	TB37
TB40	57	56	TB39
TB42	24G	24V	TB41

XBC/XEC-DP60SU


Transistor output wiring
(source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100			
TB4	COM0	TB3	-240V			
TB6	COM1	TB5	00			
TB8	COM2	TB7	01			
TB10	03	TB9	02			
TB12	COM3	TB11	N			
TB14	05	TB13	04			
TB16	07	TB15	06			
TB18	COM4	TB17	NC			
TB20	09	TB19	08			
TB22	11	TB21	10			
TB24	COM5	TB23	NC			
TB26	13	TB25	12			
TB28	15	TB27	14			
TB30	COM6	TB29	NC			
TB32	17	TB31	16			
TB34	19	TB33	18			
TB36	COM7	TB35	NC			
TB38	21	TB37	20			
TB40	23	TB39	22			
TB42	24G	TB41	24V			

* XBC input : P00~P23, XEC input : I00~I37 * XBC output : P40~P57, XEC output : Q00~Q23

XBC/XEC SU





XBC/XEC E

Economic

C o n t e n t s

Performance specifications	42
Wiring	43



Economic

Performance specifications

Item	Specifications ('E' type)						
	XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E			
XBC/XEC-DN10E	Scan synchronized batch processing method (Refresh method)		Direct method by instruction				
XBC/XEC-DP10E	XBC/XEC-DN14E		XBC/XEC-DR20E	XBC/XEC-DN30E			
Program control method		Reiterative operation, Fixed cycle operation					
I/O control method		Ladder Diagram (LD), Sequential Function Chart (SFC) Structured Text (ST), Instruction List (IL)					
Program language		240 ns /step					
Processing speed (Basic instruction)		4 Kstep (XBC-D xxxxE), 50 KB (XEC-D xxxxE)					
Max. I/O points (Main+Option X)	14 point (1 option)	18 point (1 option)	28 point (2 option)	38 point (2 option)			
Operation Mode							
RUN, STOP, DEBUG							
Total number of program block							
Task	Initialization	128					
	Fixed period	1					
	External input	8					
	Internal device	4 (%I x 0.0 ~ %I x 0.3)					
Program port							
RS-232C 1 channel (Loader)							
Self - diagnostic functions							
Watchdog Timer, Memory error detection I/O error detection, etc.							
Built - in functions							
RS-232C or RS-485(1 ch), Pulse catch, Input filter, External interrupt, High-speed counter							
Retain data at power failure							
Latch area setting at basic parameter							

Wiring | XBC/XEC E input/output wiring

XBC/XEC-DR10E
XBC/XEC-DN10E
XBC/XEC-DP10E
Input ring
(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type																																																			
<p>Terminal block no.</p>	TB2	485+	TB1	RX	<table border="1"> <tr><td>⊕</td><td></td><td>RX</td><td>TB1</td></tr> <tr><td>485-</td><td></td><td>TX</td><td>TB3</td></tr> <tr><td>00</td><td></td><td>SG</td><td>TB5</td></tr> <tr><td>01</td><td></td><td></td><td>TB7</td></tr> <tr><td>02</td><td></td><td></td><td>TB9</td></tr> <tr><td>03</td><td></td><td></td><td>TB11</td></tr> <tr><td>04</td><td></td><td></td><td>TB13</td></tr> <tr><td>05</td><td></td><td></td><td></td></tr> <tr><td>NC</td><td></td><td>NC</td><td>TB12</td></tr> <tr><td>NC</td><td></td><td>NC</td><td>TB14</td></tr> <tr><td>COM</td><td></td><td>⊕</td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	⊕		RX	TB1	485-		TX	TB3	00		SG	TB5	01			TB7	02			TB9	03			TB11	04			TB13	05				NC		NC	TB12	NC		NC	TB14	COM		⊕									
⊕		RX	TB1																																																						
485-		TX	TB3																																																						
00		SG	TB5																																																						
01			TB7																																																						
02			TB9																																																						
03			TB11																																																						
04			TB13																																																						
05																																																									
NC		NC	TB12																																																						
NC		NC	TB14																																																						
COM		⊕																																																							
TB4	485-	TB3	TX																																																						
TB6	00	TB5	SG																																																						
TB8	02	TB7	01																																																						
TB10	04	TB9	03																																																						
TB12	NC	TB11	05																																																						
TB14	COM	TB13	NC																																																						

XBC/XEC-DR10E
Relay output wiring

Circuit configuration		No.	Contact	No.	Contact	Type																																																							
<p>Terminal block no.</p>	TB2	PE	TB1	AC100 -240V	<table border="1"> <tr><td>⊕</td><td></td><td>AC100 -240V</td><td>TB1</td></tr> <tr><td>PE</td><td></td><td>AC100 -240V</td><td>TB3</td></tr> <tr><td>COM0</td><td></td><td>40</td><td>TB5</td></tr> <tr><td>COM1</td><td></td><td>41</td><td>TB7</td></tr> <tr><td>COM2</td><td></td><td>42</td><td>TB9</td></tr> <tr><td>43</td><td></td><td>43</td><td>TB11</td></tr> <tr><td>NC</td><td></td><td>NC</td><td>TB12</td></tr> <tr><td>24V</td><td></td><td>24V</td><td>TB13</td></tr> <tr><td>24G</td><td></td><td>24G</td><td>TB14</td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	⊕		AC100 -240V	TB1	PE		AC100 -240V	TB3	COM0		40	TB5	COM1		41	TB7	COM2		42	TB9	43		43	TB11	NC		NC	TB12	24V		24V	TB13	24G		24G	TB14																				
⊕		AC100 -240V	TB1																																																										
PE		AC100 -240V	TB3																																																										
COM0		40	TB5																																																										
COM1		41	TB7																																																										
COM2		42	TB9																																																										
43		43	TB11																																																										
NC		NC	TB12																																																										
24V		24V	TB13																																																										
24G		24G	TB14																																																										
TB4	COM0	TB3	40																																																										
TB6	COM1	TB5	41																																																										
TB8	COM2	TB7	41																																																										
TB10	43	TB9	42																																																										
TB12	NC	TB11	NC																																																										
TB14	24G	TB13	24V																																																										

XBC/XEC-DN10E
Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	No.	Contact	Type																																																							
<p>Terminal block no.</p>	TB2	PE	TB1	AC100 -240V	<table border="1"> <tr><td>⊕</td><td></td><td>AC100 -240V</td><td>TB1</td></tr> <tr><td>PE</td><td></td><td>AC100 -240V</td><td>TB3</td></tr> <tr><td>P</td><td></td><td>00</td><td>TB5</td></tr> <tr><td>COM0</td><td></td><td>01</td><td>TB7</td></tr> <tr><td>COM1</td><td></td><td>02</td><td>TB9</td></tr> <tr><td>03</td><td></td><td>03</td><td>TB11</td></tr> <tr><td>NC</td><td></td><td>NC</td><td>TB12</td></tr> <tr><td>24V</td><td></td><td>24V</td><td>TB13</td></tr> <tr><td>24G</td><td></td><td>24G</td><td>TB14</td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	⊕		AC100 -240V	TB1	PE		AC100 -240V	TB3	P		00	TB5	COM0		01	TB7	COM1		02	TB9	03		03	TB11	NC		NC	TB12	24V		24V	TB13	24G		24G	TB14																				
⊕		AC100 -240V	TB1																																																										
PE		AC100 -240V	TB3																																																										
P		00	TB5																																																										
COM0		01	TB7																																																										
COM1		02	TB9																																																										
03		03	TB11																																																										
NC		NC	TB12																																																										
24V		24V	TB13																																																										
24G		24G	TB14																																																										
TB4	P	TB3	00																																																										
TB6	COM0	TB5	01																																																										
TB8	COM1	TB7	01																																																										
TB10	03	TB9	02																																																										
TB12	NC	TB11	NC																																																										
TB14	24V	TB13	24V																																																										




XBC/XEC-DP10E
Transistor output wiring
(source type)

Circuit configuration		No.	Contact	No.	Contact	Type																																																							
<p>Terminal block no.</p>	TB2	PE	TB1	AC100 -240V	<table border="1"> <tr><td>⊕</td><td></td><td>AC100 -240V</td><td>TB1</td></tr> <tr><td>PE</td><td></td><td>AC100 -240V</td><td>TB3</td></tr> <tr><td>N</td><td></td><td>00</td><td>TB5</td></tr> <tr><td>COM0</td><td></td><td>01</td><td>TB7</td></tr> <tr><td>COM1</td><td></td><td>02</td><td>TB9</td></tr> <tr><td>03</td><td></td><td>03</td><td>TB11</td></tr> <tr><td>NC</td><td></td><td>NC</td><td>TB12</td></tr> <tr><td>24V</td><td></td><td>24V</td><td>TB13</td></tr> <tr><td>24G</td><td></td><td>24G</td><td>TB14</td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	⊕		AC100 -240V	TB1	PE		AC100 -240V	TB3	N		00	TB5	COM0		01	TB7	COM1		02	TB9	03		03	TB11	NC		NC	TB12	24V		24V	TB13	24G		24G	TB14																				
⊕		AC100 -240V	TB1																																																										
PE		AC100 -240V	TB3																																																										
N		00	TB5																																																										
COM0		01	TB7																																																										
COM1		02	TB9																																																										
03		03	TB11																																																										
NC		NC	TB12																																																										
24V		24V	TB13																																																										
24G		24G	TB14																																																										
TB4	N	TB3	00																																																										
TB6	COM0	TB5	01																																																										
TB8	COM1	TB7	01																																																										
TB10	03	TB9	02																																																										
TB12	NC	TB11	NC																																																										
TB14	24V	TB13	24V																																																										




* XBC input : P00~P11, XEC input : I00~I17 * XBC output : P40~P4B, XEC output : Q00~Q11

XBC/XEC E




XBC/XEC-DR14E
XBC/XEC-DN14E
XBC/XEC-DP14E
 Input wiring
 (sink/source type)

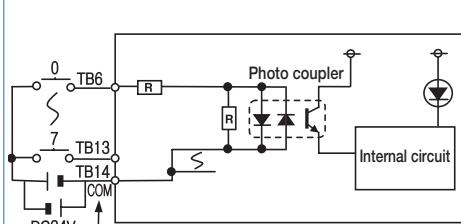Circuit configuration		No.	Contact	No.	Contact	Type
 <p>Terminal block no.</p>	TB2	485+	TB1	RX		
	TB4	485-	TB3	TX		
	TB6	00	TB5	SG		
	TB8	02	TB7	01		
	TB10	04	TB9	03		
	TB12	06	TB11	05		
	TB14	COM	TB13	07		




XBC-DR14E
 Relay output wiring

Circuit configuration		No.	Contact	No.	Contact	Type
 <p>Terminal block no.</p>	TB2	PE	TB1	AC100		
	TB4	COM0	TB3	-240V		
	TB6	COM1	TB5	40		
	TB8	COM2	TB7	41		
	TB10	43	TB9	42		
	TB12	NC	TB11	NC		
	TB14	24G	TB13	24V		

XBC/XEC-DN14E
 Transistor output wiring
 (sink type)

Circuit configuration		No.	Contact	No.	Contact	Type
 <p>Terminal block no.</p>	TB2	PE	TB1	AC100		
	TB4	P	TB3	-240V		
	TB6	COM0	TB5	00		
	TB8	COM1	TB7	01		
	TB10	03	TB9	02		
	TB12	05	TB11	04		
	TB14	24G	TB13	24V		

XBC/XEC-DP14E
 Transistor output wiring
 (source type)

Circuit configuration		No.	Contact	No.	Contact	Type
 <p>Terminal block no.</p>	TB2	PE	TB1	AC100		
	TB4	N	TB3	-240V		
	TB6	COM0	TB5	00		
	TB8	COM1	TB7	01		
	TB10	03	TB9	02		
	TB12	05	TB11	04		
	TB14	24G	TB13	24V		

* XBC input : P00~P11, XEC input : I00~I17 * XBC output : P40~P4B, XEC output : Q00~Q11

XBC/XEC-DR20E
XBC/XEC-DN20E
XBC/XEC-DP20E
Input ring
(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	485+	TB1	RX	TB2	485+ TX	TB1
TB4	485-	TB3	TX	TB3	485- SG	TB3
TB6	00	TB5	SG	TB5	00	TB5
TB8	02	TB7	01	TB7	01	TB7
TB10	04	TB9	03	TB9	02	TB9
TB12	06	TB11	05	TB11	04	TB11
TB14	08	TB13	07	TB13	06	TB13
TB16	0A	TB15	09	TB15	08	TB15
TB18	NC	TB17	0B	TB17	0A	TB17
TB20	NC	TB19	NC	TB19	NC	TB19
TB22	NC	TB21	NC	TB21	NC	TB21
TB24	COM	TB23	NC	TB23	NC	TB23

XBC-DR20E
Relay output wiring

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100	TB2	PE AC100	TB1
TB4	COM0	TB3	-240V	TB4	PE -240V	TB3
TB6	COM1	TB5	40	TB6	COM0 40	TB5
TB8	COM2	TB7	41	TB8	COM1 41	TB7
TB10	43	TB9	42	TB10	COM2 42	TB9
TB12	45	TB11	NC	TB12	COM3 43 NC	TB11
TB14	47	TB13	44	TB14	COM3 44	TB13
TB16	NC	TB15	46	TB16	45 NC	TB16
TB18	NC	TB17	NC	TB18	47 NC	TB17
TB20	NC	TB19	NC	TB20	NC NC	TB19
TB22	NC	TB21	NC	TB22	NC NC	TB21
TB24	24G	TB23	24V	TB24	24V	TB23

XBC/XEC-DN20E
Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100	TB2	PE AC100	TB1
TB3	-240V	TB3	-240V	TB3	PE -240V	TB3
TB4	P	TB5	00	TB4	P 00	TB5
TB6	COM0	TB6	01	TB6	COM0 01	TB6
TB8	COM1	TB7	02	TB8	COM1 02	TB7
TB10	03	TB9	02	TB10	03 NC	TB9
TB12	COM2	TB11	NC	TB12	COM2 04 NC	TB11
TB14	05	TB13	04	TB14	05 TB13	TB13
TB16	07	TB15	06	TB16	07 TB16	TB16
TB18	NC	TB17	NC	TB18	NC NC	TB17
TB20	NC	TB19	NC	TB20	NC NC	TB19
TB22	NC	TB21	NC	TB22	NC NC	TB21
TB24	24G	TB23	24V	TB24	24V	TB23

XBC/XEC-DP20E
Transistor output wiring
(source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100	TB2	PE AC100	TB1
TB3	-240V	TB3	-240V	TB3	PE -240V	TB3
TB4	N	TB5	00	TB4	N 00	TB5
TB6	COM0	TB6	01	TB6	COM0 01	TB6
TB8	COM1	TB7	02	TB8	COM1 02	TB7
TB10	03	TB9	02	TB10	03 NC	TB9
TB12	COM2	TB11	NC	TB12	COM2 04 NC	TB11
TB14	05	TB13	04	TB14	05 TB13	TB13
TB16	07	TB15	06	TB16	07 TB16	TB16
TB18	NC	TB17	NC	TB18	NC NC	TB17
TB20	NC	TB19	NC	TB20	NC NC	TB19
TB22	NC	TB21	NC	TB22	NC NC	TB21
TB24	24G	TB23	24V	TB24	24V	TB23

* XBC input : P00~P11, XEC input : I00~I17 * XBC output : P40~P4B, XEC output : Q00~Q11

XBC/XEC-DR30E

XBC/XEC-DN30E

XBC/XEC-DP30E

Input wiring

(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	485+	TB1	RX	TB1	RX	TB1
TB4	485-	TB3	TX	TB2	485+ TX	TB3
TB6	00	TB5	SG	TB4	485- SG	TB5
TB8	02	TB7	01	TB6	00 03	TB7
TB10	04	TB8	02 05	TB8	02 05	TB8
TB12	06	TB10	04 07	TB10	04 05	TB11
TB14	08	TB12	06 07	TB12	06 07	TB13
TB16	0A	TB14	08 09	TB14	08 09	TB16
TB18	OC	TB16	0A 0B	TB16	0A 0B	TB17
TB20	OE	TB18	OC OD	TB18	OC OD	TB19
TB22	10	TB20	OE OF	TB20	OE OF	TB21
TB24	COM	TB22	10 11	TB22	10 11	TB23
		TB24	COM	TB24	COM	

XBC-DR30E

Relay output wiring

Circuit configuration		No.	Contact	No.	Contact	Type
TB5	PE	TB1	AC100	TB1	AC100	TB1
TB4	COM0	TB2	-240V	TB2	PE -240V	TB3
TB6	COM1	TB3	40	TB3	40	TB5
TB8	COM2	TB4	41	TB4	41	TB7
TB10	43	TB5	42	TB5	42	TB9
TB12	COM3	TB6	43 NC	TB6	43 NC	TB11
TB14	45	TB7	44	TB7	44	TB13
TB16	47	TB8	45 46	TB8	45 46	TB16
TB18	COM4	TB9	47 NC	TB9	47 NC	TB17
TB20	49	TB10	48	TB10	48	TB19
TB22	4B	TB11	4A	TB11	4A	TB21
TB24	24G	TB12	24V	TB12	24V	TB23
		TB13	24G	TB13	24G	

XBC/XEC-DN30E

Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100	TB1	AC100	TB1
TB3	-240V	TB2	PE -240V	TB2	PE -240V	TB3
TB5	00	TB3	00	TB3	00	TB5
TB6	COM0	TB4	01	TB4	01	TB7
TB8	COM1	TB5	02	TB5	02	TB9
TB10	03	TB6	03 NC	TB6	03 NC	TB11
TB12	COM2	TB7	04	TB7	04	TB13
TB14	05	TB8	05 06	TB8	05 06	TB16
TB16	07	TB9	07 NC	TB9	07 NC	TB17
TB18	COM3	TB10	08	TB10	08	TB19
TB20	09	TB11	09 10	TB11	09 10	TB21
TB22	11	TB12	11 24V	TB12	11 24V	TB23
TB24	24G	TB13	24G	TB13	24G	


XBC/XEC-DP30E

Transistor output wiring
(source type)

Circuit configuration		No.	Contact	No.	Contact	Type
TB2	PE	TB1	AC100	TB1	AC100	TB1
TB3	-240V	TB2	PE -240V	TB2	PE -240V	TB3
TB5	00	TB3	00	TB3	00	TB5
TB6	COM0	TB4	01	TB4	01	TB7
TB8	COM1	TB5	02	TB5	02	TB9
TB10	03	TB6	03 NC	TB6	03 NC	TB11
TB12	COM2	TB7	04	TB7	04	TB13
TB14	05	TB8	05 06	TB8	05 06	TB16
TB16	07	TB9	07 NC	TB9	07 NC	TB17
TB18	COM3	TB10	08	TB10	08	TB19
TB20	09	TB11	09 10	TB11	09 10	TB21
TB22	11	TB12	11 24V	TB12	11 24V	TB23
TB24	24G	TB13	24G	TB13	24G	

* XBC input : P00~P11, XEC input : I00~I17 * XBC output : P40~P4B, XEC output : Q00~Q11

XBC/XEC E



XBM Slim

Slim

C o n t e n t s

General specification	50
Performance specifications	51
Wiring	55





Slim

Modular type unit
(XBM-DN32H, DN32HP,
DN32S, DR16S, DN16S)



Item	Descriptions			Standard	
Ambient temperature	0 ~ 55 °C				
Storage temperature	-25 ~ +70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration			IEC61131-2 10 times each direction (X, Y and Z)	
	Frequency	Acceleration	Pulse width		
	10 ≤ f < 57Hz	–	0.075mm		
	57 ≤ f ≤ 150Hz	9.8m/s ² (1G)	–		
	Continuous vibration				
	Frequency	Acceleration	Pulse width		
Shock resistance	10 ≤ f < 57Hz	–	0.035mm	IEC61131-2	
	57 ≤ f ≤ 150Hz	4.9m/s ² (0.5G)	–		
Noise resistance	Square wave impulse noise	±500 V		LSIS Standard	
	Electrostatic discharge	4kV		IEC61131-2 IEC61000-4-2	
	Radiated electromagnetic field noise	80 ~ 1000MHz, 10V/m		IEC61131-2 IEC61000-4-3	
	Fast transient/Burst noise	Main unit 2kV	Expansion module 1kV	IEC61131-2 IEC61000-4-4	
Operating ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution level ^{*)}	Less than 2				
Cooling	Air-cooling				

^{*)}1) Pollution level indicates the degree to which conductive material is generated in the environment where the equipment is used.
Pollution level 2 is the condition that only non-conductive pollution occurred but temporary conductivity may be produced due to condensing.

Performance specifications

Common performance specifications for CPU



Item		Specifications XBM-DN32HP / H2	Remark
Program control method		Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt	
I/O control method		Batch processing by simultaneous scan (Refresh method), Directed by program instruction	
Program language		LD(Ladder Diagram), Instruction List, SFC (Sequential Function Chart)ST (Structured Text)	
Number of instructions	Basic	28	
	Application	677	
Processing speed (Basic instruction)		40ns/step	
Program capacity		64kStep	
Max. I/O points		256 points (Main + Expansion 7 stages)	
Data area	P	P0000 ~ P2047F (32,768 points)	Input/Output
	M	M0000 ~ M2047F (32,768 points)	
	K	K0000 ~ K4095F (65,536 points)	
	L	L0000 ~ L4095F (65,536 points)	Link
	F	F0000 ~ F2047F (32,768 points)	
	T	100 ^{ms} , 10 ^{ms} , 1 ^{ms} : T0000 ~ T2047 (set by parameter)	Timer
	C	C0000 ~ C2047	Counter
	S	S00.00 ~ S127.99	Step
	D	D0000 ~ D32767	Data register
	U	U0.0 ~ U08.31	Analog Data
File register	Z	Z000 ~ Z127 (128word)	
	N	N0000 ~ N10239 (10,240 word)	
Total program		256	
Initial task	Initial task	1	
	Cyclic task	Max 16	
	I/O task	Max 8	
	Internal device task	Max 16	
	High Speed Counter task	Max 4	
	File register	1	
Operation mode		RUN, STOP, DEBUG	
Self-diagnosis function		Detects errors of scan time, memory, I/O and power supply	
Program port		USB 1 channel	
Back-up method		Latch area setting in basic parameter	
Internal consumption current		540mA	
Weight		134g	

XBM Slim

Common performance specifications for CPU



Item	Specifications		Remark
	XEM-DN32H2/XEM-DN32HP		
Program control method	Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt		
I/O control method	Batch processing by simultaneous scan (Refresh method), Directed by program instruction		
Program language	LD (Ladder Diagram), Instruction List, SFC (Sequential Function Chart) ST(Structured Text)		
Number of instructions	Operator	18	
	Basic function	136+Real number operation function	
	Basic function block	43	
	Dedicated function block	Special function dedicated function	
Processing speed (Basic instruction)	40ns/step		
Program capacity	384KB		
Max. I/O points	256 points (Main + Expansion 7 stages)		
Data area	Automatic variable (A)	64KB (All area retain setting available)	
	Input variable (I)	2 KB (%IX15.15.63)	
	Output variable (Q)	2 KB (%QX15.15.63)	
	Direct variable	M 32KB (All area retain setting available)	
		R 32KB (2block)	
		W 64KB	
	Flag variable	F 4KB	
		K 8KB	
		L 8KB	
		U 576KB	
	N0000 ~ N10239 (10,240 word)		
Total program	256		
Initial task	Initial task	1	
	Cyclic task	Max 16	
	I/O task	Max 8	
	Internal device task	Max 16	
	High speed counter task	Max 4	
	Positioning task	1	
Operation mode	RUN, STOP, DEBUG		
Self-diagnosis function	Detects errors of scan time, memory, I/O and power supply		
Program port	USB 1 channel		
Back-up method	Latch area setting in basic parameter		
Internal consumption current	540mA		
Weight	134g		

Built in Function

Item	
PID control	Control by instruction, auto-tuning, PWM output, Forced output, Operation scan time setting,Antiwindup, Delta MV, SV lamp, Hybrid operation, Cascade operation
Cnet	PID control Dedicated protocol(XGT) Modbus protocol User defined protocol , LS bus(inverter protocol)
	Channel RS-232C 1 port and RS-485 1 port
Enet	Transfer spec Cable: 100Base-TX, Speed: 100Mbps, Auto-MDIX*1, IEEE 802.3
	Topology Star
	Diagnosis Module information, Service condition
	Protocol XGT dedicated, Modbus TCP/IP, user define frame
	Service P2P, High Speed link, Remote connection,SMTP,SNTP, Auto scan
High speed counter	Performance 1 phase: 200B'(2 phase: 100B')
	channels 1phase 4 channels, 2 phase 2 channels
	Counter mode 4 counter modes are supported based on input pulse and INC/DEC method • 1 pulse operation Mode : INC/DEC count by program • 1 pulse operation Mode : INC/DEC count by phase B pulse input • 2 pulse operation Mode : INC/DEC count by input pulse • 2 pulse operation Mode : INC/DEC count by difference of phase
	Function • Internal/external preset • Latch counter • Compare output • No. of rotation per unit time
Position	Basic function No. of control axis: 6axis(XBM / XEM-DN32H2: 2 axis) Control method : Position control, Speed control, Speed/Position control, Position/Speed control Control Unit: Pulse, mm, inch, degree Position data: 400 steps for each axis(1~400) Operation mode: end, keep, continuous Operation method: single, repeat
	Interpolation function • 2/3/4/5/6 axis linear interpolation (XBM/XEM-DN32H2: 2 axis linear interpolation) • 2 axis circular interpolation • 3 axis helical interpolation(not supported in XBM / XEM-DN32H2)
	Position Absolute method / Incremental method Position address range: -2,147,483,648 ~ 2,147,483,647(Pulse) Speed: max. 200kpps Acc/dec processing: Trapezoid-shaped , S-curve
	Origin return method DOG + HOME (Off), DOG + HOME(On), Upper / Lower limit + HOME, DOG, High speed, / Lower limit, HOME
	Jog operation Jog Operation, MPG Operation, Inchng Operation
Pulse catch 10 μ s 4point (%IX0.0~%IX0.3), 50 μ s 4point (%IX0.0.4~%IX0.0.7)	
External point interrupt 10 μ s 4point (%IX0.0~%IX0.3), 50 μ s 4point (%IX0.0.4~%IX0.0.7)	
Input filter 1,3,5,10,20,70,100ms	

*1 Auto-MDIX(Automatic medium-dependent interface crossover) :
It is the function to automatically detect whether the cable connected to the Ethernet port is peer-to-peer(straight) or cross cable

Common performance specifications for CPU



Item	Specifications		Remark
	XBM-DN32H		
Program control method	Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt		
I/O control method	Batch processing by simultaneous scan (Refresh method), Directed by program instruction		
Program language	LD(Ladder Diagram), Instruction List, SFC (Sequential Function Chart)ST (Structured Text)		
Number of instructions	Basic	28	
	Application	677	
Processing speed (Basic instruction)	40ns/step		
Program capacity	64kStep		
Max. I/O points	256 points (Main + Expansion 7 stages)		
Data area	P	P0000 ~ P2047F (32,768 points)	Input/Output
	M	M0000 ~ M2047F (32,768 points)	
	K	K0000 ~ K4095F (65,536 points)	
	L	L0000 ~ L4095F (65,536 points)	Link
	F	F0000 ~ F2047F (32,768 points)	
	T	100 ^{ms} , 10 ^{ms} , 1 ^{ms} : T0000 ~ T2047 (set by parameter)	Timer
	C	C0000 ~ C2047	Counter
	S	S00.00 ~ S127.99	Step
	D	D0000 ~ D32767	Data register
	U	U0.0 ~ U08.31	Analog Data
	Z	Z000 ~ Z127 (128word)	
N	N0000 ~ N10239 (10,240 word)		
File register	P	RAM area 8block (R00000 ~ R32,767)	
Total program	256		
Initial task	Initial task	1	
	Cyclic task	Max 16	
	I/O task	Max 8	
	Internal device task	Max 16	
	High Speed Counter task	Max 4	
	File register	1	
Operation mode	RUN, STOP, DEBUG		
Self-diagnosis function	Detects errors of scan time, memory, I/O and power supply		
Program port	USB 1 channel		
Back-up method	Latch area setting in basic parameter		
Internal consumption current	540mA		
Weight	134g		

Modular type unit

Slim

Performance specifications


Item	XBM-DR16S	XBM-DN16S	XBM-DN32S			
Control method	Repetitive, cyclic, fixed cycle operation, constant scan					
I/O control method	Refresh mode (Batch processing by scan synchronization), Direct mode by instruction					
Programming language	Ladder diagram, Instruction List					
Processing speed	160 ns/Step					
Program capacity	10Kstep					
Main unit I/O points	16 points (Input:8, Output:8)	16 points (Input:8, Output:8)	32 points (Input:16, Output:16)			
Max. I/O points (Main + Expansion 7 stages)	240 points		256 points			
Total program	128					
Operation mode	RUN, STOP, DEBUG					
Self diagnosis	Detects errors of scan time, memory error, I/O error, battery error, power error, etc.					
Program port	RS-232C 1 channel (Loader)					
Retain data at power failure	Latch area setting at basic parameter					
Built-in functions	RS-232C/RS-485(2 ch), Pulse catch, Input filter, External interrupt, PID control, High-speed counter, Positioning ^{*1}					
Data memory						
XBM						
Data area	P	P0000 ~ P127F (2,048 points)				
	M	M0000 ~ M255F (4,096 points)				
	K	K0000 ~ K2559F (Special area: K2600~K2559F) (40,960 points)				
	L	L0000 ~ L1279F (20,480 points)				
	F	F000 ~ F255F (4,096 points)				
	T	100ms, 10ms, 1ms: T000 ~ T255 (256) (Adjustable by parameter setting)				
	C	C000 ~ C255 (256)				
	S	S00.00 ~ S127.99				
	D	D0000 ~ D5119 (5,120 word)				
	U	U00.00 ~ U07.31 (Analog data refresh area: 256 word)				
	Z	Z000 ~ Z127 (128 word)				
	N	N0000 ~ N3935 (3,936 word)				

^{*1}) XBM-DR16S does not have built-in positioning function.

XBM-DN32HP

16 point DC24V input wiring
(Source/Sink type)

Circuit configuration		No.	Contact	No.	Contact	Type
B20	00	A20	20			
B19	01	A19	21			
B18	02	A18	22			
B17	03	A17	23			
B16	04	A16	24			
B15	05	A15	25			
B14	06	A14	26			
B13	07	A13	27			
B12	08	A12	28			
B11	09	A11	29			
B10	0A	A10	2A			
B09	0B	A9	2B			
B08	0C	A8	2C			
B07	0D	A7	2D			
B06	0E	A6	2E			
B05	0F	A5	2F			
B04	NC	A4	P			
B03	NC	A3	P			
B02	IN_COM	A2	OUT_COM			
B01	IN_COM	A1	OUT_COM			

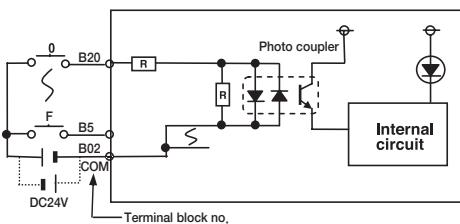


The diagram shows a 16-point DC24V input configuration. It includes a terminal block labeled 'Terminal block no.' with pins B20, B19, B18, B17, B16, B15, B14, B13, B12, B11, B10, B09, B08, B07, B06, B05, B04, B03, B02, and B01. Pin B02 is connected to COM. A 'DC24V' power source is connected to pin B02 and ground. A 'Photo coupler' is used to interface between the external input and the internal circuit. The internal circuit is represented by a box labeled 'Internal circuit'.

XBM-DN32HP

16 point transistor output
(Sink type)

Circuit configuration		No.	Contact		Type
B20	00	A20	20		
B19	01	A19	21		
B18	02	A18	22		
B17	03	A17	23		
B16	04	A16	24		
B15	05	A15	25		
B14	06	A14	26		
B13	07	A13	27		
B12	08	A12	28		
B11	09	A11	29		
B10	0A	A10	2A		
B09	0B	A9	2B		
B08	0C	A8	2C		
B07	0D	A7	2D		
B06	0E	A6	2E		
B05	0F	A5	2F		
B04	NC	A4	P		
B03	NC	A3	P		
B02	IN_COM	A2	OUT_COM		
B01	IN_COM	A1	OUT_COM		

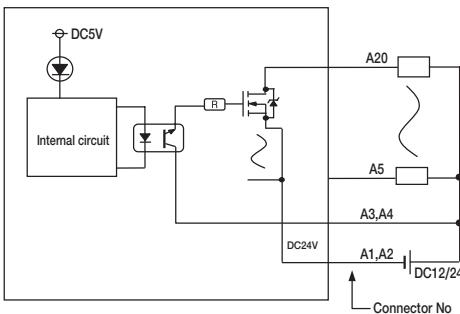

The diagram shows a 16-point transistor output configuration. It includes a connector labeled 'Connector No.' with pins A20, A19, A18, A17, A16, A15, A14, A13, A12, A11, A10, A09, A08, A07, A06, A05, A04, A03, A02, and A01. A 'DC24V' power source is connected to pin A19 and ground. A 'DC12/24V' power source is connected to pin A1 and ground. An 'Internal circuit' is connected to the outputs. A 'DC5V' power source is connected to the internal circuit. The internal circuit is represented by a box labeled 'Internal circuit'.


XGB Slim input/output wiring

Programmable Logic Controller

XBM-DN32H

Input wiring
(Sink / Source type)


Circuit configuration		No.	Contact	No.	Contact	Type
B20	00	A20	20			
B19	01	A19	21			
B18	02	A18	22			
B17	03	A17	23			
B16	04	A16	24			
B15	05	A15	25			
B14	06	A14	26			
B13	07	A13	27			
B12	08	A12	28			
B11	09	A11	29			
B10	0A	A10	2A			
B09	0B	A9	2B			
B08	0C	A8	2C			
B07	0D	A7	2D			
B06	0E	A6	2E			
B05	0F	A5	2F			
B04	NC	A4	P			
B03	NC	A3	P			
B02	IN_COM	A2	OUT_COM			
B01	IN_COM	A1	OUT_COM			

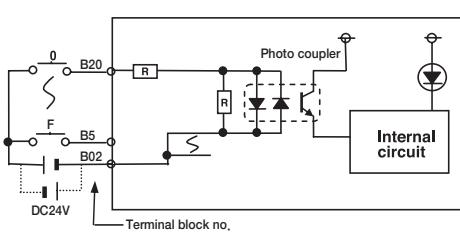

XBM-DN32H

Transistor output
(Sink type)

Circuit configuration		No.	Contact	Type
B20	00	A20	20	
B19	01	A19	21	
B18	02	A18	22	
B17	03	A17	23	
B16	04	A16	24	
B15	05	A15	25	
B14	06	A14	26	
B13	07	A13	27	
B12	08	A12	28	
B11	09	A11	29	
B10	0A	A10	2A	
B09	0B	A9	2B	
B08	0C	A8	2C	
B07	0D	A7	2D	
B06	0E	A6	2E	
B05	0F	A5	2F	
B04	NC	A4	P	
B03	NC	A3	P	
B02	IN_COM	A2	OUT_COM	
B01	IN_COM	A1	OUT_COM	

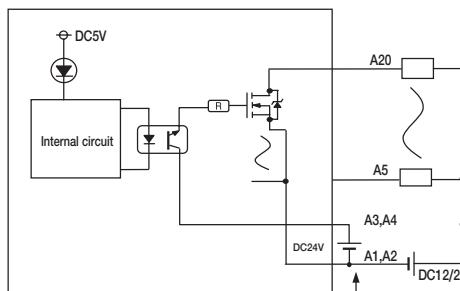

XBM Slim

XBM-DR16S

Input wiring
(sink/source type)

Circuit configuration		No.	Contact	Type
TB1	0	TB1		
TB2	1	TB2		
TB3	2	TB3		
TB4	3	TB4		
TB5	4	TB5		
TB6	5	TB6		
TB7	6	TB7		
TB8	7	TB8		
TB9	COM	TB9	COM	

XBM-DR16S

Relay output wiring

Circuit configuration		No.	Contact	Type
TB1	20	TB1		
TB2	21	TB2		
TB3	22	TB3		
TB4	23	TB4		
TB5	24	TB5		
TB6	25	TB6		
TB7	26	TB7		
TB8	27	TB8		
TB9	COM	TB9	COM	

XBM-DN16S

Input wiring(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
B10	0	A10	NC	B10		
B09	1	A09	NC	B09		
B08	2	A08	NC	B08		
B07	3	A07	NC	B07		
B06	4	A06	NC	B06		
B05	5	A05	NC	B05		
B04	6	A04	NC	B04		
B03	7	A03	NC	B03		
B02	COM	A02	NC	B02		
B01	COM	A01	NC	B01		

XBM-DR16S

Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	Type
B10	20	B10		A10
B09	21	B09		A09
B08	22	B08		A08
B07	23	B07		A07
B06	24	B06		A06
B05	25	B05		A05
B04	26	B04		A04
B03	27	B03		A03
B02	DC12/24V	B02		A02
B01	NC	B01		A01
A09	NC			
A08	NC			
A07	NC			
A06	NC			
A05	NC			
A04	NC			
A03	NC			
A02	COM			
A01	COM			

Terminal block no.

XBM-DN16S

Input wiring(sink/source type)

Circuit configuration		No.	Contact	No.	Contact	Type
B10	0	A10	NC	B10		A10
B09	1	A09	NC	B09		A09
B08	2	A08	NC	B08		A08
B07	3	A07	NC	B07		A07
B06	4	A06	NC	B06		A06
B05	5	A05	NC	B05		A05
B04	6	A04	NC	B04		A04
B03	7	A03	NC	B03		A03
B02	COM	A02	COM	B02		A02
B01	COM	A01	COM	B01		A01

Terminal block no.

XBM-DR16S

Transistor output wiring
(sink type)

Circuit configuration		No.	Contact	Type
B10	20	B10		A10
B09	21	B09		A09
B08	22	B08		A08
B07	23	B07		A07
B06	24	B06		A06
B05	25	B05		A05
B04	26	B04		A04
B03	27	B03		A03
B02	DC12/24V	B02		A02
B01	2A	B01		A01
A09	2B	A09		
A08	2C	A08		
A07	2D	A07		
A06	2E	A06		
A05	2F	A05		
A04	2F	A04		
A03	COM	A03		
A02	COM	A02		
A01	COM	A01		

Terminal block no.

Slim**Transistor output wiring**
(XBM-DN16S)

Circuit configuration		No.	Contact	Type
B10	20			
B09	21			
B08	22			
B07	23			
B06	24			
B05	25			
B04	26			
B03	27			
B02	DC12/24V			
B01	24V			
A10	NC			
A09	NC			
A08	NC			
A07	NC			
A06	NC			
A05	NC			
A04	NC			
A03	NC			
A02				COM
A01				COM

Input wiring
(XBM-DN32S)

Circuit configuration		No.	Contact	No.	Contact	Type
B10	00	A10	08			
B09	01	A09	09			
B08	02	A08	0A			
B07	03	A07	0B			
B06	04	A06	0C			
B05	05	A05	0D			
B04	06	A04	0E			
B03	07	A03	0F			
B02	COM	A02	COM			
B01	COM	A01	COM			

Transistor output wiring
(XBM-DN32S)

Circuit configuration		No.	Contact	Type
B10	20			
B09	21			
B08	22			
B07	23			
B06	24			
B05	25			
B04	26			
B03	27			
B02	DC12/24V			
B01	24V			
A10	28			
A09	29			
A08	2A			
A07	2B			
A06	2C			
A05	2D			
A04	2E			
A03	2F			
A02				COM
A01				COM



Application

XGB Series

Contents

Input/Output specification	64
Names and functions	71
Built-in functions	75
Expansion	86
DC Input	86
Transistor Output	87
Relay Output	88
DC Input/Relay Output	89
Analog Input	91
Analog Output	92
Analog Input/Output	93
RTD	94
Thermocouple	95
Temperature controller module	96
Load Cell input module	98
Positioning module	99
EtherCAT positioning module	100
High Speed counter module	102
Modular type	103
Communication	104
Option modules/Smart link	108
Software	109
XGT Panel iXP Series	110
XGT Panel eXP Series	111
XGT Panel XP Series	112
Product list	114
Dimension	117





U type

Input specification

Item	XEC-DN32U/XEC-DN32UP/XEC-DN32UA XEC-DR28U/XEC-DR28UP/XEC-DR28UA
Input point	16 point
Insulation method	Photo coupler insulation
Rated input voltage	DC24V
Rated input current	About 4mA (Contact point 0~3: about 7mA)
Operation voltage range	DC20.4~28.8V (within ripple rate 5%)
On voltage / On current	DC19V or higher / 3mA or higher
Off voltage / Off current	DC6V or lower / 1mA or lower
Input resistance	About 5.6 kΩ (P00~P07: about 4.7 kΩ)
Response time	Off → On 1/3/5/10/20/70/100ms (Set by I/O parameter) Default: 3ms On → Off
Insulation pressure	AC560Vrms/3 cycle (altitude 2000m)
Insulation resistance	10ms or more by MegOhmMeter
Common method	16 point/COM
Proper cable size	0.3~0.75mm²
Operation indicator	LED On when Input On
External connection method	8 point terminal block + 10point terminal connector
Weight	571g

Transistor output specification

Item	XEC-DN32U/XEC-DN32UP/XEC-DN32UA
Output point	16 point
Insulation method	Photo coupler insulation
Rated load voltage	DC 12/24V
Operation load voltage range	DC 10.2 ~ 26.4V
Max. load current	0.5A/1 point, 2A/1COM
Off leakage current	0.1mA or less
Max. inrush current	4A/10ms or less
Max. voltage drop when On	DC 0.4V or less
Surge absorber	Zener diode
Response time	Off → On 1ms or less On → Off 1ms or less (rated load, resistive load)
Common method	16 point/COM
Proper wire size	Stranded wire 0.3~0.75mm² (external diameter 2.8mm or less)
External power	Voltage DC12/24V ± 10% (Ripple voltage 4 Vp-p or less) Current 10mA or less (When connecting DC24V)
Operation indicator	LED On when Output On
External connection method	8 point terminal block connector + 10 point terminal block connector
Weight	571g

High performance type

Input specification

Item	XBC/XEC-DR32H	XBC/XEC-DN32H XEC-DP32H	XBC/XEC-DR64H	XBC/XEC-DN64H XEC-DP64H	XEC-DR32H/D1 XEC-DR64H/D1		
Input points	16 points	32 points		16 points			
Rated input voltage	DC 24V			DC 12/24V			
Rated input current	4mA (Contact 0~7: 9mA)			5/10mA (Contact 0~7: 7/15mA)			
Operation voltage range	DC 20.4 ~ 28.8V (Ripple rate < 5%)			DC 9.5~30V (Ripple rate < 5%)			
On voltage / On current	DC 19V or more/3mA or more			DC 9V or more/3mA or more			
Off voltage / Off current	DC 6V or less/1mA or less			DC 5V or less/1mA or less			
Input resistance	5.6kΩ (P00 ~ P07: 2.7kΩ)			2.7kΩ (%IX0.0.0~%IX0.0.7:1.8kΩ)			
Response time	Off → On	1/3/5/10/20/70/100 ms					
	On → Off	(Setting by CPU parameter) Initial value: 3ms					

Relay output specification

Item	XBC/XEC-DR32H	XBC/XEC-DR64H
Output point	16 points	32 points
Insulation method	Relay insulation	
Rated load voltage / current	DC 24V 2A (Resistive load)/AC 220V 2A ($\text{COS } \phi = 1$), 5A/COM	
Min. load voltage / current	DC 5V/1mA	
Max. load voltage	AC 250V, DC 125V	
Off leakage current	0.1mA (AC 220V, 60Hz)	
Max. On / Off frequency	3,600 times/hr	
Service life	Mechanical	20millions times or more
	Electrical	Rated load voltage/current 100,000 times or more
		AC 200V/1.5A, AC 240V/1A ($\text{COS } \phi = 0.7$) 100,000 times or more
		AC 200V/1A, AC 240V/0.5A ($\text{COS } \phi = 0.35$) 100,000 times or more
		DC 24V/1A, DC 100V/0.1A (L / R = 7ms) 100,000 times or more
Response time	Off → On	10ms or less
	On → Off	12ms or less
Common method	4 points/COM	P20 ~ 2F: 4 points/COM P30 ~ 3F: 8 points/COM

Transistor output specification

Item	XBC-DN32H/XEC-DN(P)32H	XBC-DN64H/XEC-DN(P)64H
Output point	16 points	32 points
Insulation method	Photo coupler insulation	
Rated load voltage	DC 12/24V	
Load voltage range	DC 10.2 ~ 26.4 V	
Max. load voltage	0.5A / 1 point (P20 ~ 23: 0.1A/point)	
Off leakage current	0.1mA or less	
Max. inrush current	4A/10ms or less	
Max. voltage drop (On)	DC 0.4V or less	
Surge absorber	Zener Diode	
Response time	Off → On	1ms or less
	On → Off	1ms or less (Rated load, resistive load)
Common method	4 points/COM	P20 ~ 2F: 4 points/COM P30 ~ 3F: 8 points/COM
External power supply	Voltage	DC 12/24V ± 10% (Ripple voltage 4 Vp-p or less)
	Current	10mA or less (DC 24V connection)

Standard type

Input specification

Item	XBC/XEC-DN20SU XBC/XEC-DR20SU	XBC/XEC-DN30SU XBC/XEC-DR30SU	XBC/XEC-DN40SU XBC/XEC-DR40SU	XBC/XEC-DN60SU XBC/XEC-DR60SU
Input point	12 points	18 points	24 points	36 points
Rated input voltage		DC 24V		
Rated input current	4mA (Contact point 0~1:16mA, 2~7:10mA), DN20SU (DN30SU) : 4mA (Contact point 0~7: 10mA)			
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)		
On voltage / On current		DC 19V or more/3mA or more		
Off voltage / Off current		DC 6V or less/1mA or less		
Input resistance		5.6kΩ (P00 ~ P07 : 2.7kΩ)		
Response time	Off → On On → Off	1/3/5/10/20/70/100ms (Setting by CPU parameter) Initial value : 3ms		

Transistor output specification (Sink/Source type)

Item	XBC/XEC-DN20SU XBC/XEC-DR20SU XBC/XEC-DP20SU	XBC/XEC-DN30SU XBC/XEC-DR30SU XBC/XEC-DP30SU	XBC/XEC-DN40SU XBC/XEC-DR40SU XBC/XEC-DP40SU	XBC/XEC-DN60SU XBC/XEC-DR60SU XBC/XEC-DP60SU
Output point	8 points	12 points	16 points	24 points
Insulation method		Photo coupler insulation		
Rated load voltage		DC 12/24V		
Load voltage range		DC 10.2 ~ 26.4V		
Max. load voltage		0.5A/1 point, 2A/1COM		
Off leakage current		0.1mA or less		
Max. inrush current		4A/10ms or less		
Max voltage drop (on)		DC 0.4V or less		
Surge absorbe		Zener Diode		
Response time	Off → On On → Off	DC 12/24V± 10% (Ripple voltage 4Vp-p or less) 25mA or less (DC 24V connection)		

Relay output specification

Item	XBC/XEC-DR20SU	XBC/XEC-DR30SU	XBC/XEC-DR40SU	XBC/XEC-DR60SU
Output point	8 points	12 points	16 points	24 points
Insulation method		Relay insulation		
Rated load voltage/current		DC 24V 2A/AC 220V 2A (COS φ = 1), 5A/COM		
Min. load voltage/current		DC 5V/1mA		
Max. load Current		AC 250V, DC 125V		
Off leakage current		0.1mA (AC 220V, 60Hz)		
Surge absorber		-		
Response time	Off → On On → Off	10ms or less 12ms or less		
Common method (/ COM)	4 points/COM (P40, P41 : 1 point/COM), (P42 P43 : 2 points/COM)			
Life-cycle	Mechanical	Rated load voltage/Current 10 million times or more		
	Electrical	AC 220V/1.5A, AC 240V/1A (COS φ= 0.7) 10 million times or more		
		AC 200V/1A, AC 240V/0.5A (COS φ= 0.35) 10 million times or more		
		DC 24V/1A, DC 100V/0.1A (L/ R = 7ms) 10 million times or more		

Economic type

Input specification

Specification	Modal				Main unit			
	XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E	XBC/XEC-DN10E	XBC/XEC-DN14E	XBC/XEC-DN20E	XBC/XEC-DN30E
Input point	6 points	8 points	12 points	18 points				
Insulation method					Photo coupler insulation			
Rated input voltage					DC 24V			
Rated input current					About 4mA (Contact point 0~3: about 7mA)			
Operation voltage range					DC 20.4~28.8V (Within ripple rate 5%)			
On voltage / On current					DC 19V or higher / 3mA or higher			
Off voltage / Off current					DC 6V or lower / 1mA or lower			
Input resistance					About 5.6kΩ (%I × 0.0.0~%I × 0.3: about 2.7kΩ)			
Response time	Off → On On → Off				1 / 3 / 5 / 10 / 20 / 70 / 100ms (Set by I/O parameter) Default: 3ms			
Insulation pressure					AC 560Vrms / 3 cycle (Altitude 2000m)			
Insulation resistance					10kΩ or more by MegOhmMeter			
Common method		6 points / COM	8 points / COM	12 points / COM	18 points / COM			
Proper cable size						0.3mm²		
Operation indicator						LED On when Input On		
External connection method		14 point terminal block connector (M3 × 6 screw)		24 point terminal block connector (M3 × 6 screw)				
Weight		330g	340g	450g	465g			
		313g	315g	418g	423g			

Relay output specification

Specification	Modal				Main unit			
	XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E	XBC/XEC-DR10E	XBC/XEC-DR14E	XBC/XEC-DR20E	XBC/XEC-DR30E
Output point	4 points	6 points	8 points	12 points				
Insulation method					Relay insulation			
Rated load voltage/Current					DC 24V 2A (resistive load) / AC 220V 2A (COSΦ = 1), 5A / COM			
Min. load voltage/Current					DC 5V / 1mA			
Max. load voltage					AC 250V, DC 125V			
Off leakage current					0.1mA (AC 220V, 60Hz)			
Max. On/Off frequency					3,600 times / hour			
Surge absorber					None			
Service life	Mechanical				20 million times or more			
					Rated load voltage / Current 100,000 times or more			
	Electrical				AC 200V / 1.5A, AC 240V / 1A (CO \emptyset = 0.7) 100,000 times or more			
					AC 200V / 1A, AC 240V / 0.5A (CO \emptyset = 0.35) 100,000 times or more			
					DC 24V / 1A, DC 100V / 0.1A (L / R = 7ms) 100,000 times or more			
Response time	Off → On				10ms or less			
	On → Off				12ms or less			
Common method	2 points / COM	4 points / COM	4 points / COM	4 points / COM				
Proper cable size		Stranded cable 0.3~0.75mm² (External diameter 2.8mm or less)						
Operation indicator					LED On when Output On			
External connection method	14 point terminal block connector (M3 × 6 screw)		24 point terminal block connector (M3 × 6 screw)					

Economic type

Transistor output specification
(Sink / Source type)

Specification	Modal	Main unit			
		XBC/XEC-DN10E XBC/XEC-DP10E	XBC/XEC-DN14E XBC/XEC-DP14E	XBC/XEC-DN20E XBC/XEC-DP20E	XBC/XEC-DN30E XBC/XEC-DP30E
Output point		4 points	6 points	8 points	12 points
Insulation method		Photo coupler insulation			
Rated load voltage		DC 12/24V			
Operation load voltage range		DC 10.2~26.4V			
Max. load current		0.5A/1 point, 2A/1COM			
Off leakage current		0.1mA or less			
Max. inrush current		4A/10ms or less			
Max. voltage drop when On		DC 0.4V or less			
Surge absorber		Zener diode			
Response time	Off → On	1ms less			
	On → Off	1ms less (Rated load, resistive load)			
Common method		4 point / COM			
Proper wire size		Stranded wire 0.3~0.75 mm ² (External diameter 2.8mm or less)			
External power	Voltage	DC 12/24V ±10% (Ripple voltage 4 Vp-p or less)			
	Current	25mA or less (When connecting DC 24V)			
Operation indicator		LED On when Output On			
External connection method		14 point terminal block connector (M3 × 6 screw)	24 point terminal block connector (M3 × 6 screw)		

Slim type

XBM H

Input specification

Specification	Model		Main unit
			XBM-DN32H
Input point			16 point
Insulation method			Photo coupler insulation
Rated input voltage			DC24V
Rated input current			About 4mA (Contact point 0~3: about 5mA)
Operation voltage range			DC20.4~28.8V (within ripple rate 5%)
On voltage / On current			DC19V or higher / 3mA or higher
Off voltage / Off current			DC6V or lower / 1mA or lower
Input resistance Mechanical			About 5.6 kΩ / (P00~P03: about 4.7 kΩ)
Response time	Off → On On → Off	1/3/5/10/20/70/100 ms (Set by I/O parameter) Default: 3 ms	
Insulation pressure			AC560Vrms / 3 cycle (altitude 2000m)
Insulation resistance			10 MΩ or more by MegOhmMeter
Common method			16 point / COM
Proper cable size			0.3~0.75 mm²
Operation indicator			LED On when Input On
External connection method			40point terminal connector
Weight			134g

Transistor output specification

Specification	Model		Main unit
			XBM-DN32H
Output point			16 point
Insulation method			Photo coupler insulation
Rated load voltage			DC 12/24V
Operation load voltage range			DC 10.2 ~ 26.4V
Max. load current	0.5A / 1 point, position (p00,p01,p02,p03) 0.1A/1 point 2A / 1COM		2A / 1COM
Off leakage current			0.1mA or less
Max. inrush current			4A / 10 ms or less
Max. voltage drop when On			DC 0.4V or less
Surge absorber			Zener diode
Response time	Off → On On → Off	1 ms or less 1 ms or less (rated load, resistive load)	
Common method			16 point / COM
Proper wire size			Stranded wire 0.3~0.75 mm² (external diameter 2.8mm or less)
External power	Voltage Current	DC12/24V ±10% (Ripple voltage 4 Vp-p or less) 10mA or less (When connecting DC24V)	
Operation indicator			LED On when Output On
External connection method			4 point terminal block connector
Weight			134g

Slim type

Input specification

Item	XBM-DR16S	XBM-DN16S	XBM-DN32S
Input point	8 points	8 points	16 points
Rated input voltage		DC 24V	
Rated input current		4mA (00 ~ 03: 7mA)	
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)	
Response time	Off → On On → Off	1/3/5/10/20/70/100ms (Set by CPU parameter) Default : 3ms	
Common method		8 points/COM	16 points/COM

Relay output specification

Item	XBM-DR16S	
Output point	8 points	
Insulation method	Relay insulation	
Rated load voltage / current	DC 24V 2A (Resistive load)/AC 220V 2A ($\text{COS } \phi = 1$), 5A/COM	
Min. load voltage / current	DC 5V/1mA	
Max. load voltage	AC 250V, DC 125V	
Off leakage current	0.1mA (AC 220V, 60Hz)	
Max. On / Off frequency	3,600 times/hr	
Service life	Mechanical	20 millions times or more
		Rated load voltage/Current 100,000 times or more
	Electrical	AC 200V/1.5A, AC 240V/1A ($\text{COS } \phi = 0.7$) 100,000 times or more
		AC 200V/1A, AC 240V/0.5A ($\text{COS } \phi = 0.35$) 100,000 times or more
		DC 24V/1A, DC 100V/0.1A (L / R = 7ms) 100,000 times or more
Response time	Off → On On → Off	10ms or less 12ms or less
Common method	8 points / COM	


Transistor output specification

Item	XBM-DN16S	XBM-DN32S
Output point	8 point	16 point
Insulation method	Photo coupler insulation	
Rated load voltage	DC 12/24V	
Load voltage range	DC 10.2 ~ 26.4V	
Max. load voltage	0.2A/1 point (P20 ~ 23: 0.1A/Point)	
Max. inrush current	4A/10ms or less	
Max. voltage drop (On)	DC 0.4V or less	
Response time	Off → On	1ms or less
	On → Off	1ms or less (Rated load, Resistive load)
Common method	8 point / COM	16 point / COM
External power supply	Voltage	DC 12/24V $\pm 10\%$ (Ripple voltage 4 Vp-p or less)
	Current	25mA or less (DC 24V connection)
External connection method	20pin connector	

Names and functions


Programmable Logic Controller

Block type unit (U)

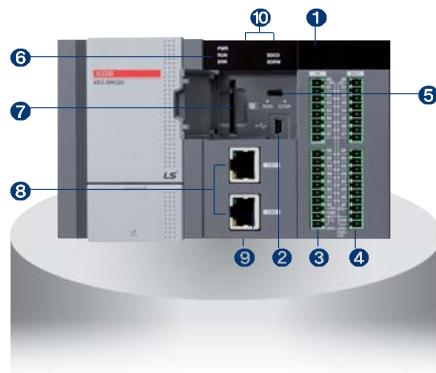


No.	Name	Descriptions	Remark
①	LED for displaying input, output	Displays the On/Off status of input, output contacts	
②	Connector for PADT	Connector (USB 1channel) to access to XG5000	
③	Input terminal block	Terminal block receiving the actual input signal	
④	Output terminal block	Terminal block outputting the actual output signal	
⑤	RUN/STOP mode switch	Sets the basic unit's operation mode. - STOP → RUN : Program's operation is executed. - RUN → STOP : Program's operation is stopped. (In case of STOP, the remote operation is available.)	
⑥	Status display LED	Displays the basic unit's operation status. - PWR (Red light On) : The power is supplied. - RUN (Green light On) : During RUN mode - ERR (Flickering red light) : Occurrence of errors during operation - STATE (Red light On/flickering Red light) : When the SD card is installed, the red light is turned On; when the SD card error occurs, the red light is flickering. - RD/WR (Flickering red light) : During SD card Write	
⑦	SD card connector	Connector with the SD memory card	
⑧	Terminal block for the embedded Enet communication	Terminal block for the embedded Enet communication	
⑨	Terminal block for the embedded communication	Terminal block (lower part of the product) for the embedded RS-232C/485 communication	
⑩	Battery holder	Battery holder (upper part of the product)	

Block type unit
(High performance,
Standard, Economic)

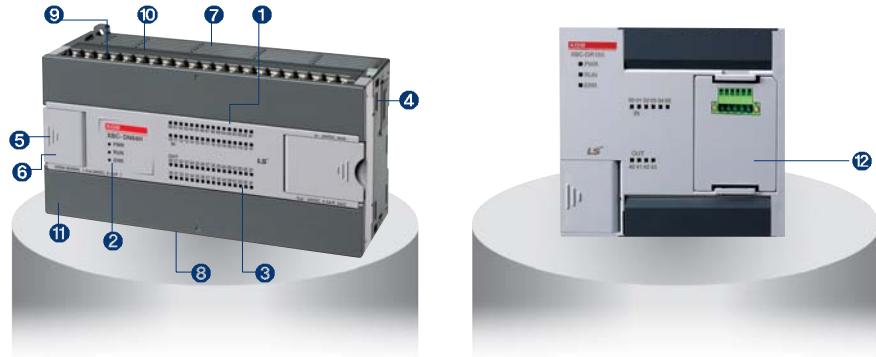

No.	Name	Descriptions	Descriptions	Remark
①	Input LED	Input indication	Red On: Input signal On Red Off: Input signal Off	
②	Condition LED	PWR: Power indication RUN: RUN indication ERR: Error indication	Red On: Power On Red Off: Power Off Green On: PLC Run Green Off: PLC Stop Red On-and-Off: PLC Error Red Off: PLC Normal condition	
③	Output LED	Output LED	On: Output signal On Off: Output signal Off	
④	Expansion module connector	Expansion module connector	Connection of expansion module (I/O, Special function, Communication)	
⑤	PADC connector	PADC connection	Connector for XG5000/XG-PD connection	
⑥	Mode switch	Mode setting	Setting Run/Stop mode of PLC	
⑦	Input terminal block	Input wiring connection	-	
⑧	Output terminal block	Output wiring connection	-	
⑨	Built-in RS-485 connector	Built-in RS-485 connection	RS-485 +/- terminal connection	
⑩	Built-in RS-232C connector	Built-in RS-232C connection	RS-232C TxD, RxD, SG terminal connection	
⑪	Power terminal	Power supply terminal	AC 100-240V power supply	
⑫	Option module slot	Slot for option module	-	

Modular type unit
[XBM-DN32H]

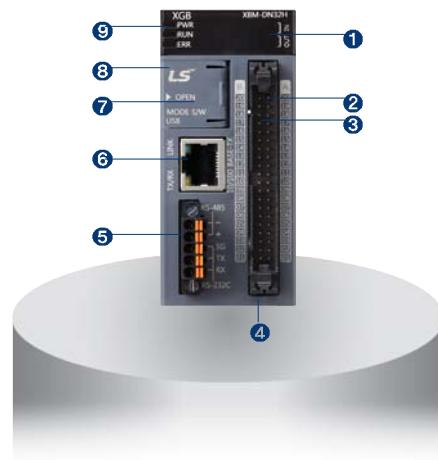

No.	Name	Descriptions
①	LED for displaying input, output	Displays the On/Off status of input, output contacts
②	Input connector	Terminal block receiving the actual input signal
③	Output connector	Terminal block outputting the actual output signal
④	Power supply connector	Power supply connector (24V)
⑤	Built-in serial communication connecting connector	Built-in RS-232C/485 connecting connector
⑥	Built-in ethernet connecting connector	Built-in Enet connecting connector
⑦	PADT connecting connector	PADT connecting connector
⑧	RUN/STOP mode switch	<ul style="list-style-type: none"> • Sets the basic unit's operation mode. - STOP→RUN : Program's operation is executed. - RUN→STOP : Program's operation is stopped. (In case of STOP, the remote operation is available.)
⑨	Status display LED	<ul style="list-style-type: none"> • Displays the basic unit's operation status. - PWR(Red light On) : The power is supplied. - RUN(Green light On) : During RUN mode - ERR(Flickering red light) : Occurrence of errors during operation - STATE(Red light On/flickering Red light) : When the SD card is installed, the red light is turned On; when the SD card error occurs, the red light is flickering. - RD/WR(Flickering red light) : During SD card Write

Modular type unit
(XBM-DR16S, DN16S, DN32S)



No.	Name	Descriptions	Descriptions	Remark
①	Input LED	Input indication	Red On: Input signal On Red Off: Input signal Off	
②	Condition LED	PWR: Power indication RUN: RUN indication ERR: Error indication	Red On: Power On Red Off: Power Off Green On: PLC Run Green Off: PLC Stop Red On-and-Off: PLC Error Red Off: PLC Normal condition	
③	Output LED	Output LED	On: Output signal On Off: Output signal Off	
④	Expansion module connector	Expansion module connector	Connection of expansion module (I/O, Special function, Communication)	
⑤	PADT connector	PADT connection	Connector for XG5000/XG-PD connection	
⑥	Mode switch	Mode setting	Setting Run/Stop mode of PLC	
⑦	Input connector / Terminal block	Input wiring connection	–	
⑧	Output connector / Terminal block	Output wiring connection	–	
⑨	Built-in RS-485 connector	Built-in RS-485 connection	RS-485 +/- terminal connection	
⑩	Built-in RS-232C connector	Built-in RS-232C connection	RS-232C TxD, RxD, SG terminal connection	
⑪	Power connector	Power supply connection	DC 24V power supply	

Built-in functions

Programmable Logic Controller

XGB U

Performance specifications

Items		Specification	Remark
PID control		Control by instruction, auto-tunning, PWM output, Forced output, Operation scan time setting, Antiwindup, Delta MV, PV tracking, Hybrid operation, Cascade operation	
Serial	Protocol	Dedicated protocol, Modbus protocol User defined protocol , LS bus (inverter protocol)	Embedded00 P2P:01
	Channel	RS-232C 1 port and RS-485 1 port	
Ethernet	Transfer spec	Cable: 100Base-TX Speed: 100Mbps Auto-MDIX ¹ IEEE 802.3	
	Topology	Line, star	
	Diagnosis	Module information, service condition	
	Protocol	XGT dedicated Modbus TCP/IP user define frame	Embedded01 P2P:02 High-speed link:01
	Service	P2P, High Speed link, Remote connection	
Datalog	Group	Max 10 group	
	Data set	32 per group	
	Extension	csv file	
	File size	Max 16Mbyte	
	SD memory type	SD,SDHC type (Recommand: SanDisk,Transcend)	
	Memory size	Max 16GB	
	File system	FAT32	
High speed counter	Performance	1-phase : 100MHz 8 channels 2-phase : 50MHz 4 channels	
	Counter mode	4 counter modes are supported based on input pulse and INC/DEC method <ul style="list-style-type: none"> • 1 pulse operation Mode : INC/DEC count by program • 1 pulse operation Mode : INC/DEC count by phase B pulse input • 2 pulse operation Mode : INC/DEC count by input pulse • 2 pulse operation Mode : INC/DEC count by difference of phase 	
	Function	<ul style="list-style-type: none"> • Internal/external preset • Latch counter • Compare output • No. of rotation per unit time 	

¹ Auto-MDIX (Automatic medium-dependent interface crossover) : It is the function to automatically detect whether the cable connected to the Ethernet port is peer-to-peer (straight) or cross cable

XGB U

Built-in positioning function
(XBC/XEC-DxxxUP)

Items	Specification	Remark
Basic function	No. of control axis: 4axis Control Method:Position, Speed, Speed/Position, Feed Control Control Unit: Pulse ,mm, inch, degree Positioning Data: Each axis can have up to 400 data (Step number:1~400) Operation pattern: End, Keep, Continuous Operation method: Singular, Repeat	
Interpolation	2/3/4 axis linear interpolation 2 axis circular interpolation 3 axis helical interpolation	
Positioning	Method: Absolute/Incremental method Address range: 2, 147, 483, 648~2, 147, 483, 647 Speed: Max 2Mpps (1~2,000,000pps) Acc /Dec process: Trapezoid type, S-type	Available on Analog
Homing method	DOG+HOME (Off), DOG+HOME (On), Upper limit + HOME, DOG, High speed, Upper/Lower limit, HOME	
Manual operation	Jog operation, MPG operation, Inchng operation	
Encoder input	Line drive (RS-422A) input 1Channel (Max 200kpps)	

Built-in analog function
(XBC/XEC-DxxxUA)

Items	Specification	Remark
Analog input	Channels 4channels (current/voltage)	
	Specification	
	Input Range Voltage: 1~5V, 0~5V, 0~10V, -10~10V Current: 4~20 mA, 0~20 mA	
	Input resistance Current input or Voltage input can be selected through the external terminal wiring setting.	
	Max. resolution 1MΩ or more (voltage input), 250Ω (current input) 1/16000 0.250 mV (1 ~ 5V) 0.3125 mV (0 ~ 5V) 0.625 mV (0 ~ 10V) 1.250 mV (±10V)	1.0 μA (4 ~ 20 mA) 1.25 μA (0 ~ 20 mA)
	Accuracy ±0.2% or less (When ambient temperature is 25°C) ±0.3% or less (When ambient temperature is 0 ~ 55°C)	
Analog output	Channels Voltage 2 channels ,Current 2 channels	
	Specification	
	Output Range Voltage: 1~5V, 0~5V, 0~10V, -10~10V Current: 4~20 mA, 0~20 mA	
	Load resistance Output ranges are set in user program or I/O parameter per each channel.	
	Max. resolution 1MΩ or more(voltage output), 600Ω or less(current output) 1/16000 0.250 mV (1 ~ 5V) 0.3125 mV (0 ~ 5V) 0.625 mV (0 ~ 10V) 1.250 mV (±10V)	1.0 μA (4 ~ 20 mA) 1.25 μA (0 ~ 20 mA)
	Accuracy ±0.2% or less (When ambient temperature is 25°C) ±0.3% or less (When ambient temperature is 0 ~ 55°C)	

XGB H/SU/E, XBM S

Performance specifications

Classification		Description					
		Block type unit			Modular type		
		H	SU	E	XBM		
Count input Signal	Signal	A-phase, B-phase					
	Input type	Voltage input (Open collector)					
	Signal level	DC 24V					
Max. count speed		100kpps	100kpps	4kpps	20kpps		
Number of channels	1 phase	100kpps 4ch/20kpps 4ch	100kpps 2ch/20kpps 6ch	4kpps 4ch	20kpps 4ch		
	2 phase	50kpps 2ch/10kpps 2ch	50kpps 1ch	2kpps 2ch	2 multiplication: 10kpps		
		50kpps 2ch/8kpps 2ch	8kpps 3ch		4 multiplication: 8kpps		
Count range		Signed 32bit (-2,147,483,648 ~ 2,147,483,647)					
Count mode (Program setting)		Linear count (If 32bit range exceeded, Carry / Borrow occurs)					
		Ring count (Repeated count within setting range)					
Input mode (Program setting)		1-phase input					
		2-phase input					
		CW/CCW input					
Signal type		Voltage					
Up/Down setting	1 phase input	Increasing/Decreasing operation setting by B-phase input					
		Increasing/Decreasing operation setting by program					
	2 phase input	Automatic setting by difference in phase					
		A-phase input: increasing operation					
Multiplication function	CW/CCW	B-phase input: decreasing operation					
		1 multiplication					
	1 phase input	4 multiplication					
		1 multiplication					
Control input	Signal	Preset instruction input					
		DC 24V input type					
	Signal type	Voltage					
External output	Output points	2 point / channel (for each channel): output contact point of basic unit available		1 point / channel (for each channel): output contact point of basic unit available			
		Select program setting, signal-compared (>, >=, =, <=, <) or section compared output (Included or excluded)					
	Output type	Relay, Open-collector output (Sink)					
Count enable		To be set through program					
Preset function		To be set through terminal (contact) or program					
Auxiliary mode		Count latch					

Input specification

Item	Description
Input voltage	24V DC (20.4V ~ 28.8V)
Input current	4mA
On voltage (min.)	20.4V
Off voltage (max.)	6V

XBM HP

Built in function

Items		Specification		Remark
		XBM-DN32HP		
	PID control	Control by instruction, auto-tuning, PWM output, Forced output, Operation scan time setting, Antiwindup, Delta MV, SV lamp, Hybrid operation, Cascade operation		
Cnet	PID control	Dedicated protocol(XGT) Modbus protocol User defined protocol , LS bus(inverter protocol)		
	Channel	RS-232C 1 port and RS-485 1 port		
	Transfer spec	Cable: 100Base-TX Speed: 100Mbps Auto-MDIX ^{*1} IEEE 802.3		
Enet	Topology	Star		
	Diagnosis	Module information, Service condition		
	Protocol	XGT dedicated, Modbus TCP/IP, user define frame		
	Service	P2P, High Speed link, Remote connection, SMTP, SNTP, Auto scan		
XBM HP Built-in Function	Performance	1 phase: 200 kHz (2 phase: 100 kHz)		
	channels	1phase 4 channels, 2 phase 2 channels		
	Counter mode	4 counter modes are supported based on input pulse and INC/DEC method		
		<ul style="list-style-type: none"> • 1 pulse operation Mode : INC/DEC count by program • 1 pulse operation Mode : INC/DEC count by phase B pulse input • 2 pulse operation Mode : INC/DEC count by input pulse • 2 pulse operation Mode : INC/DEC count by difference of phase 		
	Function	<ul style="list-style-type: none"> • Internal/external preset • Latch counter • Compare output • No. of rotation per unit time 		
	Position	No. of control axis: 2axis Pulse output type : pulse+ direction Position data: 80 steps for each axis(1~80) Operation mode: end, keep, continuous Operation method: single, repeat		
			<ul style="list-style-type: none"> • 2/3/4/5/6 axis linear interpolation(XBMH: 2 axis linear interpolation) • 2 axis circular interpolation • 3 axis helical interpolation(not supported in XBMH) 	
	Position	Absolute method / Incremental method Position address range: -2,147,483,648 ~ 2,147,483,647(Pulse) Speed range: 1~100,000pps(1pps unit) Acc/dec processing: Trapezoid-shaped		
	Origin return method	DOG + HOME (Off), DOG + HOME(On), Upper/Lower limit + HOME, DOG, High speed, Upper/Lower limit, HOME		
	Jog operation	Jog Operation, MPG Operation, Inchng Operation		
Pulse catch		10 μs 4point(P0000 ~ P0003), 50 μs 4point(P0004 ~ P0007)		
External point Interrupt		10 μs 4point(P0000 ~ P0003), 50 μs 4point(P0004 ~ P0007)		
Input filter		1,3,5,10,20,70,100 ms		

^{*1} Auto-MDIX(Automatic medium-dependent interface crossover) : It is the function to automatically detect whether the cable connected to the Ethernet port is peer-to-peer(straight) or cross cable

XBM H

Built in function

Items		Specification		Remark
		XBM-DN32H		
	PID control	Control by instruction, auto-tuning, PWM output, Forced output, Operation scan time setting, Antiwindup, Delta MV, SV lamp, Hybrid operation, Cascade operation		
Cnet	PID control	Dedicated protocol(XGT) Modbus protocol User defined protocol , LS bus(inverter protocol)		
	Channel	RS-232C 1 port and RS-485 1 port		
	Transfer spec	Cable: 100Base-TX Speed: 100Mbps Auto-MDIX [†] IEEE 802.3		
Enet	Topology	Star		
	Diagnosis	Module information, Service condition		
	Protocol	XGT dedicated, Modbus TCP/IP, user define frame		
	Service	P2P, High Speed link, Remote connection, SMTP, SNTP, Auto scan		
Built-in Function	Performance	1 phase: 200 kHz(2 phase: 100 kHz)		
	channels	1phase 4 channels, 2 phase 2 channels		
	Counter mode	4 counter modes are supported based on input pulse and INC/DEC method <ul style="list-style-type: none"> • 1 pulse operation Mode : INC/DEC count by program • 1 pulse operation Mode : INC/DEC count by phase B pulse input • 2 pulse operation Mode : INC/DEC count by input pulse • 2 pulse operation Mode : INC/DEC count by difference of phase 		
	Function	<ul style="list-style-type: none"> • Internal/external preset • Latch counter • Compare output • No. of rotation per unit time 		
	Basic function	No. of control axis: 2axis Pulse output type : pulse+ direction Position data: 80 steps for each axis(1~80) Operation mode: end, keep, continuous Operation method: single, repeat		
	Interpolation function	2/3/4/5/6 axis linear interpolation(XBMH: 2 axis linear interpolation) 2 axis circular interpolation 3 axis helical interpolation(not supported in XBMH)		
	Position	Absolute method / Incremental method Position address range: -2,147,483,648 ~ 2,147,483,647(Pulse) Speed range: 1~100,000pps(1pps unit) Acc/dec processing: Trapezoid-shaped		
	Origin return method	DOG + HOME (Off), DOG + HOME(On), Upper/Lower limit + HOME, DOG, High speed, Upper/Lower limit, HOME		
	Jog operation	Jog Operation, MPG Operation, Inchng Operation		
	Pulse catch	10 µs 4point(P0000 ~ P0003), 50 µs 4point(P0004 ~ P0007)		
	External point Interrupt	10 µs 4point(P0000 ~ P0003), 50 µs 4point(P0004 ~ P0007)		
	Input filter	1,3,5,10,20,70,100 ms		

[†] Auto-MDIX(Automatic medium-dependent interface crossover) : It is the function to automatically detect whether the cable connected to the Ethernet port is peer-to-peer(straight) or cross cable

Parts designation | Block type unit

High performance type
(XBC-H)

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
P005	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
P006	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
P007	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
P008	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P009	Ch1 preset 24V	-	Preset input terminal	No use
P00A	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P00B	Ch4 preset 24V	-	Preset input terminal	No use
P00C	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
P00D	Ch6 preset 24V	-	Preset input terminal	No use
P00E	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
P00F	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

High performance type
(XEC-H)

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
IX0.0.0	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
IX0.0.1	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
IX0.0.2	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
IX0.0.3	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
IX0.0.4	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
IX0.0.5	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
IX0.0.6	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
IX0.0.7	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
IX0.0.8	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
IX0.0.9	Ch1 preset 24V	-	Preset input terminal	No use
IX0.0.10	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
IX0.0.11	Ch4 preset 24V	-	Preset input terminal	No use
IX0.0.12	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
IX0.0.13	Ch6 preset 24V	-	Preset input terminal	No use
IX0.0.14	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
IX0.0.15	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

Standard type
(XBC-SU)

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch4 counter input	Ch4 A-phase input	Counter input terminal	A-phase input
P005	Ch5 counter input	Ch4 B-phase input	Counter input terminal	B-phase input
P006	Ch6 counter input	Ch6 A-phase input	Counter input terminal	A-phase input
P007	Ch7 counter input	Ch6 B-phase input	Counter input terminal	B-phase input
P008	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P009	Ch1 preset 24V	-	Preset input terminal	No use
P00A	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P00B	Ch4 preset 24V	-	Preset input terminal	No use
P00C	Ch5 preset 24V	Ch4 preset 24V	Preset input terminal	Preset input terminal
P00D	Ch6 preset 24V	-	Preset input terminal	No use
P00E	Ch7 preset 24V	Ch6 preset 24V	Preset input terminal	Preset input terminal
P00F	Ch8 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Input common	Input common

Parts designation | Block type unit

Economic type
(XBC-E)


Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P005	Ch1 preset 24V	-	Preset input terminal	No use
P006	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P007	Ch4 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Common terminal	Common terminal

Parts designation | Modular type unit

Modular type
(XBM)

Terminal No.	Name		Usage	
	1-phase	2-Phase	1-phase	2-Phase
P000	Ch0 counter input	Ch0 A-phase input	Counter input terminal	A-phase input
P001	Ch1 counter input	Ch0 B-phase input	Counter input terminal	B-phase input
P002	Ch2 counter input	Ch2 A-phase input	Counter input terminal	A-phase input
P003	Ch3 counter input	Ch2 B-phase input	Counter input terminal	B-phase input
P004	Ch0 preset 24V	Ch0 preset 24V	Preset input terminal	Preset input terminal
P005	Ch1 preset 24V	-	Preset input terminal	No use
P006	Ch2 preset 24V	Ch2 preset 24V	Preset input terminal	Preset input terminal
P007	Ch3 preset 24V	-	Preset input terminal	No use
COM0	Input common	Input common	Common terminal	Common terminal

Wiring

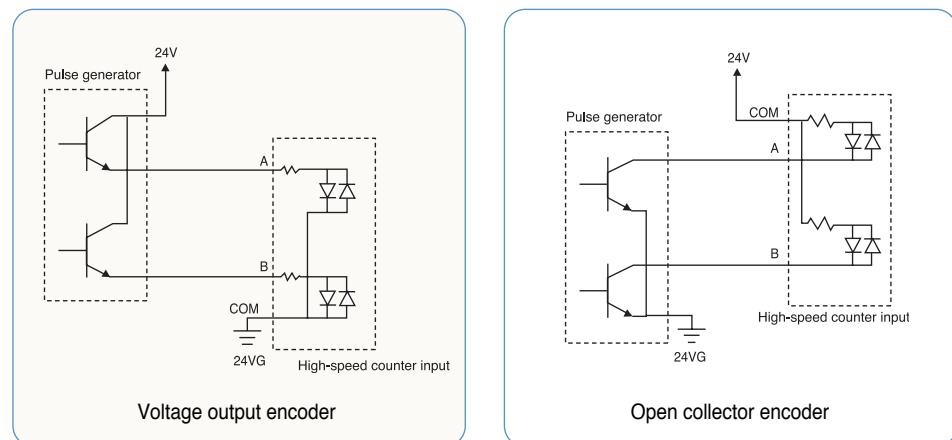

Performance specification

Classification		Description		
		Block type unit		Modular type
		H-type	SU-type	S-type
No. of control axis	2 axes			
Interpolation	2-axis linear interpolation			
Control mode	Position control, Speed control, Speed/Position switching control, Position/Speed switching control			
Control unit	Pulse			
Positioning data	30-step pattern for each axis (XBC: 80step) (operation step number : 1~ 30, XBC : 1~ 80)			
Positioning monitor	Dedicated monitoring function for positioning in XG5000			
Back-up	Permanent backup of downloaded parameter (FLASH memory)			
	2-month Super Cap backup of parameter / Data modified during operation(XBM) battery back-up (XBC)			
	Permanent backup of parameter / Data in RAM by instruction (FLASH memory)			
Positioning	Positioning method	Absolute/incremental method		
	Positioning range	-2,147,483,648 ~ 2,147,483,647		
	Speed range	1 ~ 100,000 (pulse/sec)		
	Acceleration / Deceleration type	Trapezoidal acceleration/Deceleration		
	Acceleration / Deceleration time	1 ~ 10,000 ms (4 patterns each can be set)		
Max. output pulse		100 Kpps		
Max. distance of connection		2m		

* Economic block type unit (E-type) dose not support built-in positioning functions

Electrical specification

Output	Signal	Rated input voltage	Load voltage range	Max. load current/inrush current	Max. voltage drop (On)	Leakage current (Off)	Response time
	Output pulse	DC 5~24V	DC 4.75~26.4V	100mA (1 point) 1A/10ms or less	DC 0.3V or less	0.1mA or less	100 μs or less
Input	Signal	Rated input voltage/Current	Load voltage range	On voltage / Current	Off voltage / Current	Input resistance	Response time
	External high limit	DC 24V/7mA	DC 20.4 ~ 28.8V	DC 19V/5.7mA or more	DC 6V/1.8mA or less	3.3Ω	0.5ms or less
	External low limit	DC 24V/7mA		DC 19V/3.4mA or more	DC 6V/1.1mA or less	5.6Ω	
	Approximate zero zero	DC 24V/4mA					

I/O specifications | Block type unit

High performance type
(XBC/XEC-H)

Item	XBC pin number (XEC pin number)		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00008 (%IX0.0.8)	P0000A (%IX0.0.10)	Limit L	Low limit	←	4mA/ 24V
	P00009 (%IX0.0.9)	P0000B (%IX0.0.11)	Limit H	High limit	←	
	P0000C (%IX0.0.12)	P0000E (%IX0.0.14)	DOG	Near point	←	
	P0000D (%IX0.0.13)	P0000F (%IX0.0.15)	Origin	Zero signal (+24V)	←	
	COM		Input COM	Common	←	
Output	P00020 (%QX0.0.0)	P00021 (%QX0.0.1)	Pulse	Pulse/CW (Open collector)	→	DC 12~24V
	P00022 (%QX0.0.2)	P00023 (%QX0.0.3)	Direction	Direction/CCW (Open collector)	→	
	P		DC 12V~24V	External power supply	→	
	COM 0~3		Output COM	External 24V GND	→	

Standard type
(XBC/XEC-SU)

Item	XBC pin number		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00008 (%IX0.0.8)	P0000A (%IX0.0.10)	Limit L	Low limit	←	4mA/ 24V
	P00009 (%IX0.0.9)	P0000B (%IX0.0.11)	Limit H	High limit	←	
	P0000C (%IX0.0.12)	P0000E (%IX0.0.14)	DOG	Near point	←	
	P0000D (%IX0.0.13)	P0000F (%IX0.0.15)	Origin	Zero signal (+24V)	←	
	COM		Input COM	Common	←	
Output	P00040 (%QX0.0.0)	P00041 (%QX0.0.1)	Pulse	Pulse/CW (Open collector)	→	DC 12~24V
	P00042 (%QX0.0.2)	P00043 (%QX0.0.3)	Direction	Direction/CCW (Open collector)	→	
	P		DC 12V~24V	External power supply	→	
	COM 0~3		Output COM	External 24V GND	→	

I/O specifications | Modular type unit

Standard type

Item	XBM pin number		Signal name		Direction of positioning signal to external	Operating condition
	X axis	Y axis				
Input	P00000	P00002	Limit L	Low limit	↑	Edge
	P00001	P00003	Limit H	High limit	↑	Edge
	P00004	P00006	DOG	Near point	↑	Edge
	P00005	P00007	Origin	Zero signal (+24V)	↑	Edge
	COM		Input COM	Common	↑	-
Output	P00020	P00021	Pulse	Pulse/CW (Open collector)	→	-
	P00022	P00023	Direction	Direction/CCW (Open collector)	→	-
	12/24V		DC 12/24V	External power supply	→	-
	COM		Output COM	External 24V GND	→	-


Performance specification (PID)

Classification		Description		
		Block type unit		Modular type
	H	SU	S	
No. of control loop		16-loop independent control		
Control mode		P control, PI control, PD control, PID control		
Control period		10ms ~ 6,553.5ms (Setting unit: 0.1ms)		
Function	Forward/Reverse Mixed control	Switching control direction automatically when exceeding dead band		
	Cascade	Improved control precision by serial connection between master loop and slave loop		
	SV Ramp	Preventing overload caused by excessive SV change by setting variation slope		
	Alarm	Improved control stability with various alarm function such as MV high limit / Low limit, PV high limit/low limit, PV variation width		
	Auto tuning	Auto tuning with improved auto-tuning algorithm		
	Additional function	PWM output, PV Tracking, Δ MV, Δ PV, etc		

* Economic block type unit (E-type) dose not support built-in PID functions

Pulse catch


When On-condition time of input signal is shorter than 1 scan time (Min. 50 μ s), Pulse catch processes the input signal as normal input.

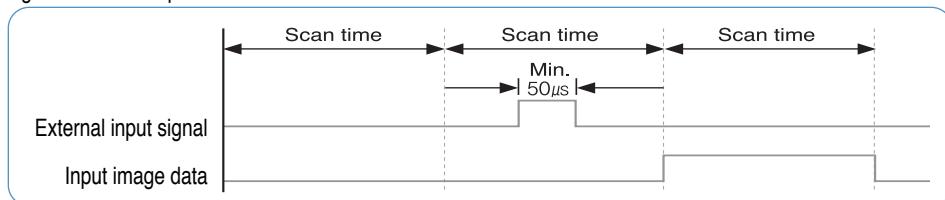

Item	Description			
	Block type unit			Modular type
	H	SU	E	S
Pulse catch	10 μ s: 4 points (P00000~P00003) 50 μ s: 4 points (P00004~P00007)	10 μ s: 2 points (P00000~P00001) 50 μ s: 6 points (P00002~P00007)	50 μ s: 4 points (P00000~P00003)	50 μ s: 8 points (P00000~P00007)

Input filter

Input filter prevents processing of the input signal that is shorter than the filtering time. (Filtering time is set by parameter) In the application site where noise is frequently generated, input filter prevents wrong input caused by noise.

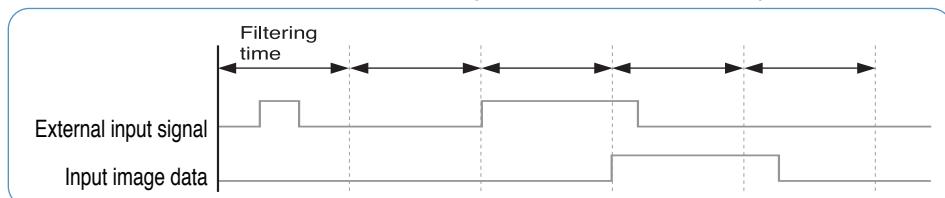

Classification	Description			
	Block type unit			Modular type
	H	SU	E	S
No. of setting points	Every input contact			
Input filtering time setting	Assigning for each module			
Setting range	1 ~ 100 ms (1, 3, 5, 10, 20, 70, 100)			

I/O specifications | Block type unit

Task

Task function is the processing method of internal/external signal generated periodically or aperiodically. It stops operation of scan program for the moment and then execute the assigned task.


Classification	Description			
	Block type unit			Modular type
	H	SU	E	S
Initial task	1(_INT)			
Cyclic task	8			
I/O task	8	8	4	8
Internal device task	8			
External interrupt	10 μ s: 4 points (P00000~P00003) 50 μ s: 4 points (P00004~P00007)	10 μ s: 2 points (P00000~P00001) 50 μ s: 6 points (P00002~P00007)	50 μ s: 4 points (P00000~P00003)	50 μ s: 8 points (P00000~P00007)

RTC

RTC function is for time management of system and error log. RTC function is executed steadily when power is off or instantaneous power cut status. Current time of RTC is renewed every scan by system operation status information flag.

Classification	Description			
	Block type unit			Modular type
	H	SU	E	S
RTC	Built-in	Option module	Option module	Not available


Specification

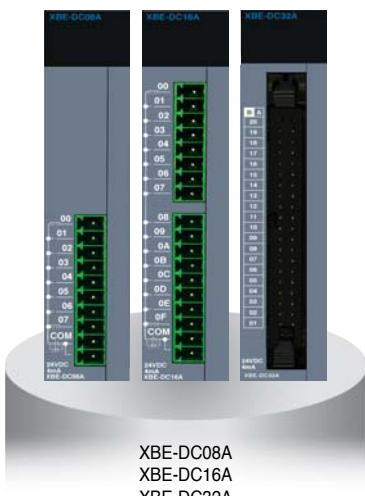


Specification	Model	XBE-DC08A	XBE-DC16A	XBE-DC32A
Input point		8 points	16 points	32 points
Rated input voltage/current			DC 24V / 4mA	
Operation voltage range			DC 20.4 ~ 28.8V (Ripple rate < 5%)	
Input resistance	Response time	5.6kΩ		
			1 / 3 / 5 / 10 / 20 / 70 / 100ms (setting by CPU parameter) Initial value: 3ms	
Insulation pressure			AC 560Vrms / 3 Cycle (altitude 2000m)	
Insulation resistance			10MΩ or more by megger	
COMMON method		8 points / COM	16 points / COM	32 points / COM
Internal current consumption		30mA	40mA	50mA

Wiring

(XBE-DC08A/DC16A)

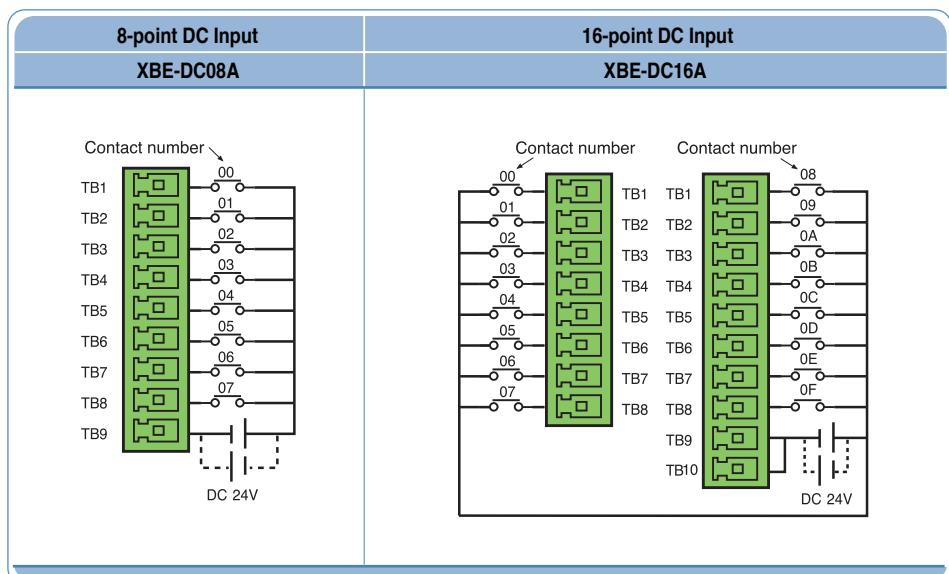


Specification

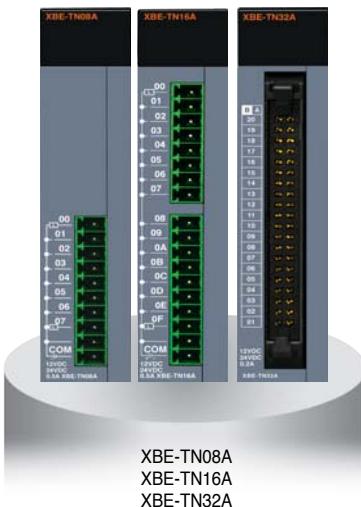


Specification	Model	XBE-TN08A	XBE-TP08A	XBE-TN16A	XBE-TP16A	XBE-TN32A	XBE-TP32A
Type		Sink	Source	Sink	Source	Sink	Source
Output point		8 point		16 point		32 point	
Rated load voltage				DC 12 / 24V			
Load voltage range				DC 10.2 ~ 26.4 V			
Max. load current		0.2A / 1 point		0.2A / 1 point, 2A / COM			
Off leakage current				0.1mA or less			
Max. voltage drop (On)				DC 0.4V			
Response time	Off → On			1mA or less			
	On → Off			1mA or less (Rated load, resistive load)			
Common method		8 points / COM		16 points / COM		32 points / COM	
Internal current consumption		40mA		60mA		120mA	
External power supply	Voltage			DC 12 / 24V ± 10% (Ripple voltage ≤ 4 Vp-p)			
	Current			10mA or less (DC 24V connection)		20mA or less (DC 24V connection)	

Item		XBF-AD04C	
Analog range	Item	Voltage	Current
	Range	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V, DC -10 ~ 10V (Input resistance 1MΩ min)	DC 4 ~ 20mA DC 0 ~ 20mA (Input resistance 250MΩ)
Digital Output Range	Type	16bit binary data (Data : 14bit)	
Digital Output Range	Unsigned value	0 ~ 16000	
	Signed value	-8000 ~ 8000	
Digital Output Range	Precise value	1000 ~ 5000 (1 ~ 5V), 0 ~ 5000 (0 ~ 5V), 0 ~ 10000 (0 ~ 10V)	4000 ~ 20000 (4 ~ 20mA), 0 ~ 20000 (0 ~ 20mA)
	Percentile value	0 ~ 10000	
Resolution		1/16000	
		0.250mV (1 ~ 5V) 0.3125mV(0 ~ 5V) 0.625mV (0 ~ 10V) 1.250mV(±10V)	1.0µA (4 ~ 20mA) 1.25µA (0 ~ 20mA)
Max. conversion speed		1ms/channel	
Max. absolute input		DC ±15V	DC ±3mA
Analog Input Channels		4 channel/module	
Insulation method		Photo-coupler insulation between input terminal and PLC power (no insulation between channels)	
Connection terminal		15-point terminal block	
Occupied I/O points		Fixed type : 64points	
Current consumption	DC 5V	110mA	
	DC 24V	100mA	

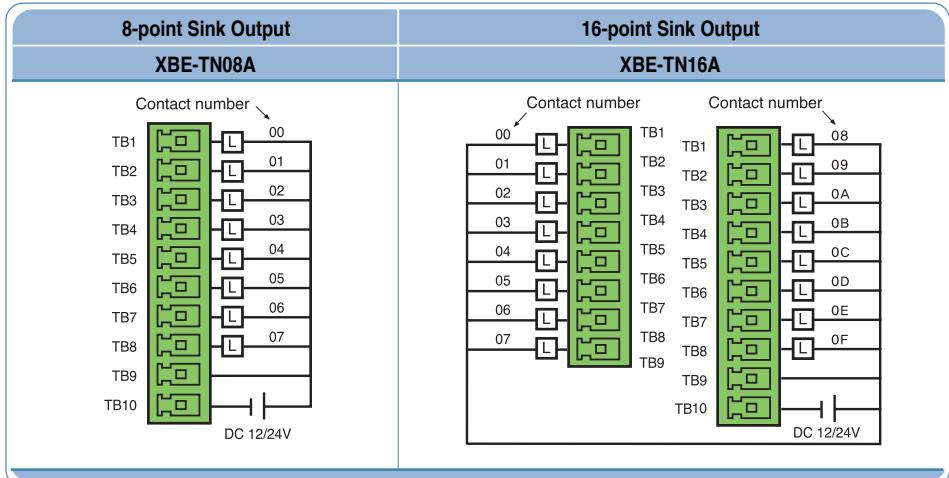Wiring
(XBE-TN08A/TN16A)


Specification

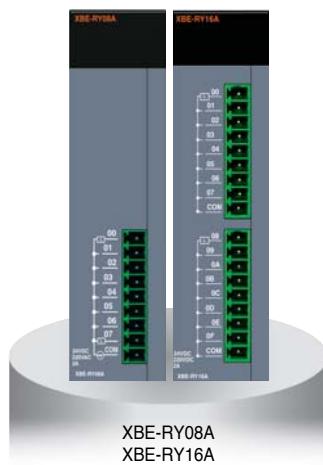

Specification	Model	XBE-RY08A	XBE-RY16A
Output point		8 points	16 points
Insulation method		Relay insulation	
Rated input voltage/Current		DC 24V 2A (resistive load)/AC 220V 2A ($\cos \varphi = 1$), 5A /COM	
Min. load voltage/Current		DC 5V 1mA	
Max. load voltage		AC 250V, DC 125V	
Off leakage current		0.1mA (AC 220V, 60Hz)	
Max. on/Off frequency		3,600 times / hr	
Surge absorber		None	
Service life	Mechanical	20million times or more	
	Electrical	Rated load voltage/Current 100,000 times or more AC 200V/1.5A, AC 240V/1A ($\cos \varphi = 0.7$) 100,000 times or more AC 200V/1A, AC 240V/0.5 ($\cos \varphi = 0.35$) 100,000 times or more DC 24V/1A, DC 100V/0.1A (L / R = 7ms) 100,000 times or more	
Response time	Off → On	10ms or less	
	On → Off	12ms or less	
COMMON method		8 points / 1COM	
Internal current consumption		230mA	420mA
Operation indicator		Output On, LED On	
External connection method		9-pin terminal block connector	9-pin terminal block connector × 2

Item		XBF-DV04C	XBF-DC04C
Analog range	Item	Voltage	Current
	Range	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V, DC -10 ~ 10V (Input resistance 1kΩ or more)	DC 4 ~ 20mA DC 0 ~ 20mA (Input resistance 600M Ω or less)
Digital Output Range	Type	16bit binary data (Data : 14bit)	
	Unsigned value	0 ~ 16000	
	Signed value	-8000 ~ 8000	
	Precise value	1000 ~ 5000 (1 ~ 5V), 0 ~ 5000 (0 ~ 5V), 0 ~ 10000 (0 ~ 10V)	4000 ~ 20000 (4 ~ 20mA), 0 ~ 20000 (0 ~ 20mA)
	Percentile value	0 ~ 10000 1/16000	
Resolution		0.250mV (1 ~ 5V) 0.3125mV (0 ~ 5V) 0.625m V(0 ~ 10V) 1.250mV (±10V)	1.0μA (4 ~ 20mA) 1.25μA (0 ~ 20mA)
Max. conversion speed		1ms/channel	
Analog Input Channels		4 channel/module	
Insulation method		Photo-coupler insulation between output terminal and PLC power (no insulation between channels)	
Connection terminal		11-point terminal block	
Occupied I/O points		Fixed type : 64points	
Current consumption	DC 5V	75mA	
	DC 24V	170mA	


DC Input specification

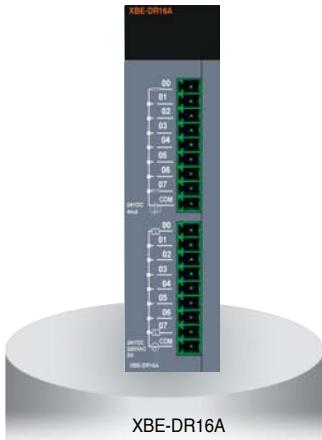


Specification	Model	DC Input (XBE-DR16A)
Input point		8 points
Insulation method		Photocoupler
Rated input voltage		DC 24V
Rated input current		4mA
Operation voltage range		DC 20.4 ~ 28.8V (Ripple rate < 5%)
On voltage/On current		DC 19V or more/3mA or more
Off voltage/Off current		DC 6V or less/1mA or less
Input resistance		5.6kΩ
Response time	Off → On On → Off	1/3/5/10/20/70/100ms (setting by CPU parameter) init value: 3ms
COMMON method		8 points/COM
Weight		81g

Relay output specification

Specification	Model	Relay Output (XBE-DR16A)
Output point		8 points
Insulation method		Relay insulation
Rated input voltage/Current		DC 24V 2A (resistive load)/AC 220V 2A ($\text{COS}\psi = 1$), 5A /COM
Min. load voltage/Current		DC 5V 1mA
Max. load voltage		AC 250V, DC 125V
Off leakage current		0.1mA (AC 220V, 60Hz)
Max. on/Off frequency		3,600 times/hr
Surge absorber		None
Service life	Mechanical	20million times or more
		Rated load voltage/Current 100,000 times or more
	Electrical	AC 200V/1.5A, AC 240V/1A ($\text{COS}\psi = 0.7$) 100,000 times or more
		AC 200V/1A, AC 240V/0.5 ($\text{COS}\psi = 0.35$) 100,000 times or more
Response time	Off → On	10ms or less
	On → Off	12ms or less
COMMON method		8 points/1COM
Internal current consumption		250mA
Operation indicator		Output On, LED On
External connection method		9-pin terminal block connector

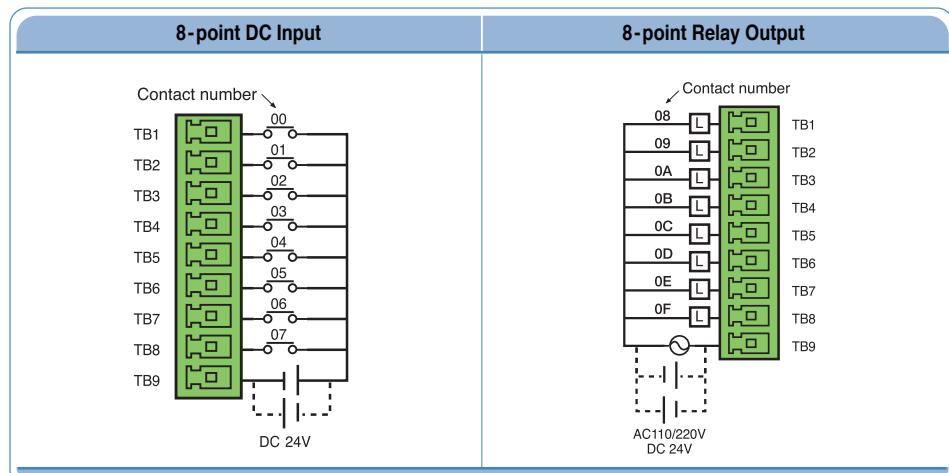Wiring
(XBE-DR16A)


DC Input specification

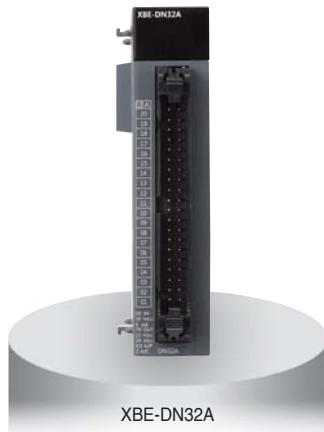


Specification	Model		DC input module XBE-DN32A
Input point			16 point
Insulation method			Photo coupler insulation
Rated input voltage			DC24V
Rated input current			About 4mA
Input Derating			DC20.4~28.8V (ripple rate < 5%)
Operation voltage range			Refer to Derating diagram
On voltage / On current			DC 19V or higher / 3 mA or higher
Off voltage / Off current			DC 6V or less / 1mA or less
Input resistance			About 5.6 kΩ
Response time	Off → On		1/3/5/10/20/70/100 ms (set by CPU parameter) Default:3 ms
	On → Off		
Insulation pressure			AC 560Vrms / 3 Cycle (altitude 2000m)
Insulation resistance			10 MΩ or more by Megohmmeter
Common method			16 point / COM
Proper cable size			0.3 mm²
Current consumption			60 mA (When all inputs and outputs are on)
Operation indicator			Input On, LED On
External connection method			40 pin connector
Weight			60g

Transistor specification

Specification	Model		Main unit XBE-DN32A
Output point			16 point
Insulation method			Photo coupler insulation
Rated voltage			DC12/24V
Rated current			About 4mA
Operation voltage range			DC10.2~26.4V
Max. load voltage			0.2A / 1 point, 2A / 1COM
Off leakage current			0.1mA or less
Max. load voltage			0.7A / 10ms or less
Max. voltage drop (On)			DC 0.4V or less
Surge absorber			TVS Diode
Response time	Off → On		1 ms or less
	On → Off		1 ms or less (Rated load, resistive load)
Common method			32 point / COM
Proper cable size			0.3 mm²
Current consumption			60mA (when all point On)
External power	Voltage		DC12/24V 10% (ripple voltage 4 Vp-p or less)
	Current		20mA or less (connecting DC24V)
Operation indicator			LED On when output On
External connection method			40 pin terminal block connector
Weight			60g

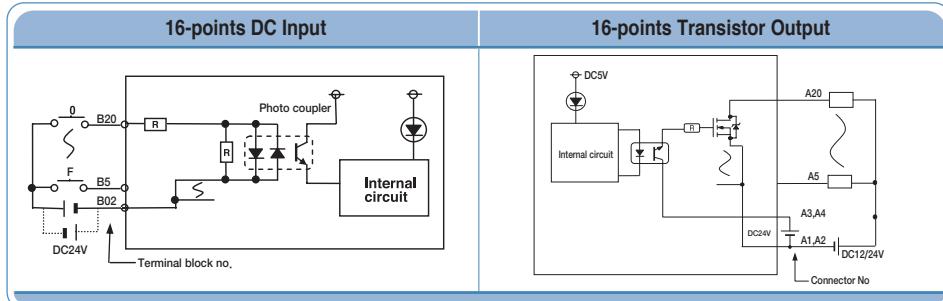Wiring
(XBE-DN32A)

Specification

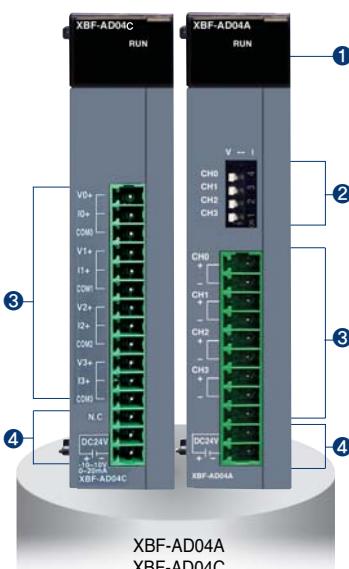


Item		XBF-AD04A		XBF-AD04C		XBF-AD08A	
Analog range	Item	Voltage	Current	Voltage	Current	Voltage	Current
	Range	DC 0~10V (input resistance : 1MΩ min.)	DC 4~20mA, DC 0~20mA (input resistance: 250Ω)	DC 1 ~ 5V DC 0 ~ 5V DC 0 ~ 10V DC -10 ~ 10V (Input resistance : 1MΩ min)	DC 4 ~ 20mA DC 0 ~ 20mA (Input resistance : 250MΩ)	DC 1~5V DC 0~5V DC 0~10V (Input resistance : 250MΩ)	DC 4~20mA, DC 0~20mA (input resistance: 250Ω)
Digital output	Type	12bit binary data		16bit binary data (Data : 14bit)		12bit binary data	
	Range	Unsigned value	0~4000	0 ~ 16000		0~4000	
		Signed value	-2000~2000	-8000~8000		-2000~2000	
	Precise value	0~1000	4000~2000 / 0~2000	100~5000 (1~5V) 0~5000 (0~5V) 0~10000 (0~5V) -10000~10000 (+10V)	4000~20000 (4~20mA) 0~20000 (~20mA)	100~500 (DC 1~5V) 0~500 (DC 0~5V) 0~1000 (DC 0~10V)	4000~2000 (DC 4~20mA) 0~2000 (DC 0~20mA)
Resolution	Percentile value	0~1000		0~10000		0~1000	
		2.5mV (1/4000)	5μA (1/4000)	1/16000		1.25mV (DC 1~5V, 0~5V) 2.5mV (DC 0~10V)	5μA (DC 4~20mA, 0~20mA)
				0.250mV (1~5V) 0.3125mV (0~5V) 0.625mV (0~10V) 1.250mV (±10V)	1.0μA (4~20mA) 1.25μA (0~20mA)		
Max. conversion speed		1.5ms / channel		1ms / channel		1.5ms / channel	
Max. absolute input		±15V	±25mA	DC ±15V	DC ±3mA	±15V	±25mA
Analog Input channels		4 channel/module		4 channel/module		8 channel/module	
Insulation method		Photocoupler insulation between I/O terminal and power supply		Photo-coupler insulation between input terminal and PLC power (No insulation between channels)		Photocoupler insulation between I/O terminal and power supply	
Connection terminal		11-point terminal block		15-point terminal block		11-point terminal block	
Occupied I/O points		Fixed type : 64 points					
Current consumption	DC 5V	120mA		110mA		105mA	
	DC 24V	62mA		100mA		85mA	

Names and Functions


No.	Name	Descriptions
①	RUN LED	▶ Indicates condition of module <ul style="list-style-type: none"> • LED On: Normal condition • LED On and Off: Flickering • LED Off: Power Off or module malfunction
②	Input selection S/W	▶ Voltage/Current selection switch <ul style="list-style-type: none"> • V: Voltage input selection • I: Current input selection
③	Terminal block	▶ External device connection
④	External power supply terminal	▶ External DC 24V input

Wiring

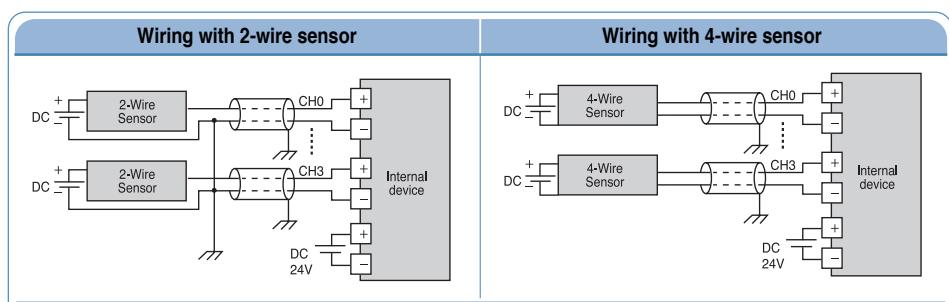

*Use 22AWG, 2 conductor, twist shielded cable when wiring between analog module and external device.

Specification

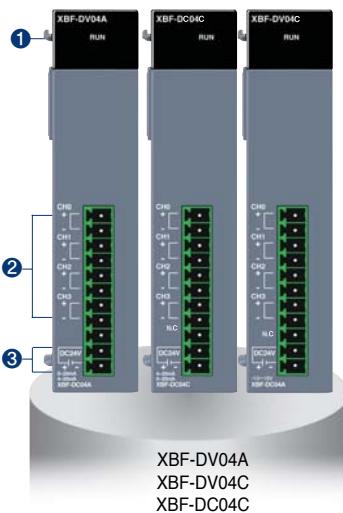


XBF-DV04A
XBF-DV04C
XBF-DC04C

Item	XBF-DV04A	XBF-DV04C	XBF-DC04C	XBF-DC04A
Analog range	DC 0 ~ 10 V (Load resistance $\geq 2k\Omega$)	DC 1 ~ 5V DC 0 ~ 5V DC 0 ~ 10V DC -10 ~ 10V (Input resistance : 1k Ω or more)	DC 4 ~ 20mA DC 0 ~ 20mA (Input resistance : 600M Ω or less)	4 ~ 20mA / 0 ~ 20mA (Load resistance $\leq 510\Omega$)
Analog range Selection	-	-	XG 5000 I/O parameter	
Digital data	Output range 0 ~ 10 V	-	-	4 ~ 20mA/0 ~ 20mA
	Unsigned value 0 ~ 4000	0 ~ 16000		0 ~ 4000
	Signed value - 2000 ~ 2000	- 8000 ~ 8000		- 2000 ~ 2000
	Precise value 0 ~ 1000	1000~5000 (1~5V) 0~5000 (0~5V) 0~10000 (0~10V) -1000~10000 ($\pm 10V$)	4000~20000 (4~20mA) 0~20000 (0~20mA)	400 ~ 2000/0 ~ 2000
	Percentile value 0~1000	0~10000		0~1000
	Data format	Data format of digital input is set by user program or I/O parameter (Setting for each channel is available.)		
Resolution	Resolution (1/4000) 2.5mV	1/1600 0.250m (1~5V) 0.3125m (0~5V) 0.625m (0~10V) 1.250m ($\pm 10V$)	Resolution (1/4000) 1ms/channel	Resolution (1/4000) 1ms/channel
Max. conversion speed	1ms/channel	1ms/channel	1ms/channel	1ms/channel
Max. absolute output	$\pm 15V$	-	-	$\pm 25mA$
Accuracy	$\pm 0.5\%$ or less	-	-	$\pm 0.5\%$ or less
Analog output channels	4 channel/module	4 channel/module	4 channel/module	4 channel/module
Insulation method	Photocoupler insulation between I/O terminal and power supply	Photo-coupler insulation between output terminal and PLC power (no insulation between channels)	Photocoupler insulation between I/O terminal and power supply	
Connection terminal	11-point terminal block			
Occupied I/O points	Fixed type: 64 points			
Current consumption	DC 5V DC 24V	110mA 70mA	75mA 170mA	110mA 120mA


Names and Functions

No.	Name	Descriptions
①	RUN LED	► Indicates condition of module • LED On: Normal condition • LED On and Off: Flickering • LED Off: Power Off or module malfunction
②	Terminal block	► External device connection
③	External power supply terminal	► External DC 24V input

Wiring

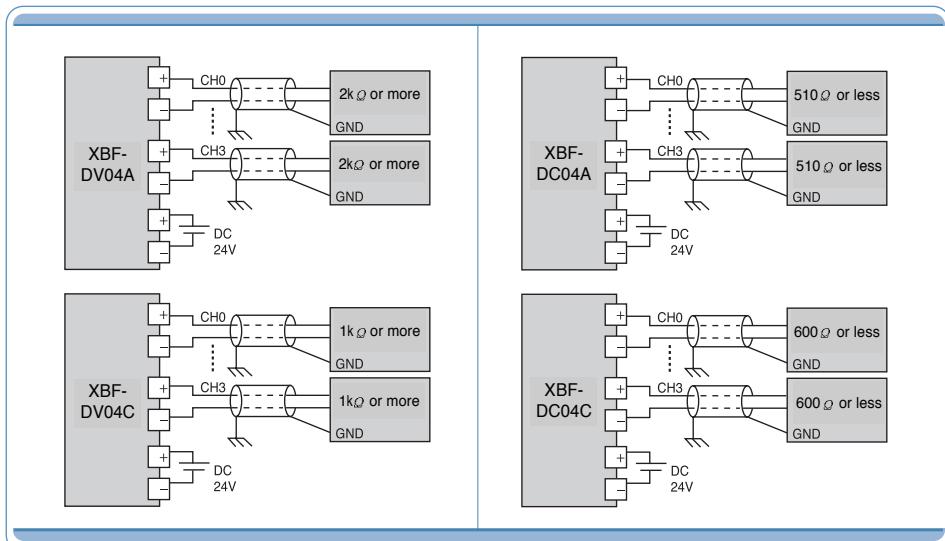

Specification

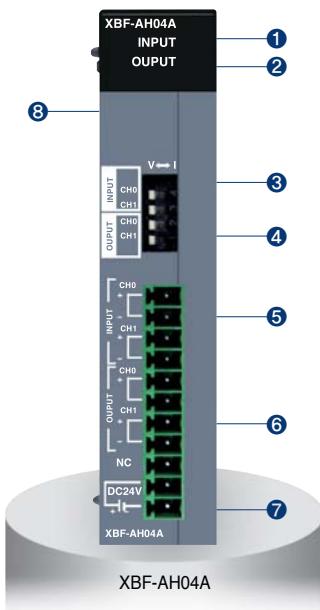


Item	XBF-AH04A	
	Input	Output
Analog channel	2 channels	2 channels
Analog range	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V (Input resistance: 1 MΩ min.) DC 4 ~ 20mA, DC 0 ~ 20mA (Input resistance 250 Ω)	DC 1 ~ 5V, DC 0 ~ 5V, DC 0 ~ 10V (Load resistance ≥ 2k Ω) DC 4 ~ 20mA, DC 0 ~ 20mA (Load resistance ≤ 510 Ω)
Analog range selection	XG 5000 I/O parameter and External switch	
Digital data	Unsigned value Signed value Precise value Percentile value	0 ~ 4000 -2000 ~ 2000 100 ~ 500 (DC 1 ~ 5V), 0 ~ 500 (DC 0 ~ 5V), 0 ~ 1000 (DC 0 ~ 10V) 400 ~ 2000 (DC 4 ~ 20mA), 0 ~ 2000 (DC 0 ~ 20mA) 0 ~ 1000
Resolution (1/4000)		1.25mV (DC 1~5V, 0~5V), 2.5mV (DC 0~10V) 5 μA (DC 4~20mA, 0~20mA)
Max. conversion speed		±15V, 25mA
Max. absolute output		1ms / Channel
Accuracy		±0.5% or less
Insulation method		Photocoupler insulation between I/O terminal and power supply
Connection terminal		11-point terminal block
Occupied I/O points		Fixed type: 64 points
Current consumption	DC 5V DC 24V	120mA 130mA

Names and Functions


No.	Name	Descriptions
①	INPUT LED	▶ Indicates input condition of module • LED On: Normal condition • LED On and Off: Flickering • LED Off: Power Off or module malfunction
②	OUTPUT LED	▶ Indicates output condition of module • LED On: Normal condition • LED On and Off: Flickering • LED Off: Power Off or module malfunction
③	Input selection S/W	▶ Voltage / Current selection switch for input
④	Output selection S/W	▶ Voltage / Current selection switch for output
⑤	Terminal block	▶ Terminal for external input device
⑥	Terminal block	▶ Terminal for external output device
⑦	External power supply terminal	▶ Terminal for external DC 24V input
⑧	Expansion connector	▶ Terminal for expansion

Wiring

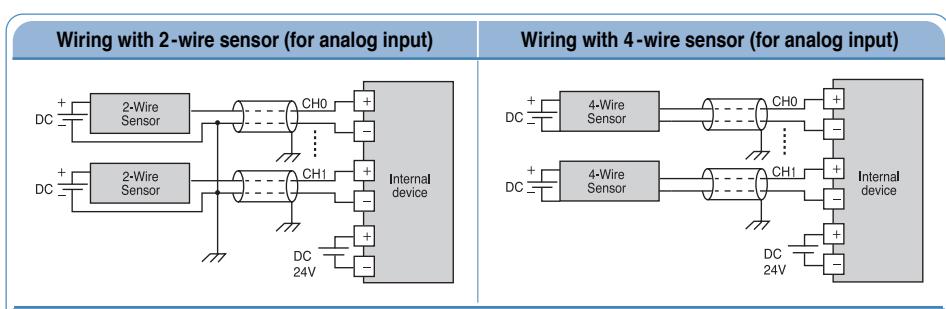

*Use 22AWG, 2 conductor, twist shielded cable when wiring between analog module and external device.

Specification

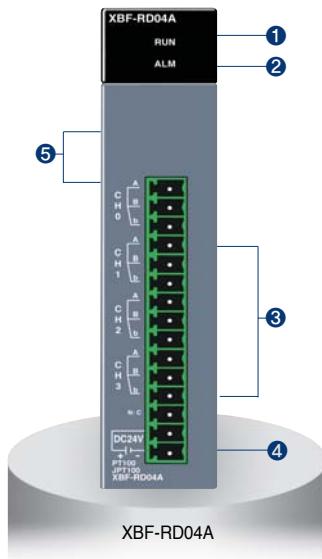


Item		XBF-RD04A
Number of channels		4
Sensor type	PT 100	JIS C1804-1997
	JPT 100	JIS C1604-1981, KS C1603-1991
Temperature range	PT 100	-200 ~ 600 °C
	JPT 100	-200 ~ 600 °C
	PT 100	-2000 ~ 6000
Digital output	JPT 100	-2000 ~ 6000
	Scaling	0 ~ 4000
	Accuracy	±0.3% or less
Conversion speed	25°C	±0.5% or less
	0 ~ 55°C	40ms / Ch
Wiring method		3-wire
Current consumption	DC 5V	100mA
	DC 24V	100mA


Names and Functions

No.	Name	Descriptions
①	RUN LED	▶ Displays the hardware operation status (Fatal fault) • On: Normal status • Flickering: Error (0.2s flickering) • Off: hardware error or power off
②	ALM LED	▶ Displays the status of the channels (Light fault) • Flickering: Line disconnection (1s flickering) • Off: Normal status
③	Terminal block	▶ 3-wire RTD sensors can be connected
④	External power terminal	▶ Supplies the external DC 24V
⑤	Expansion connector	▶ Connects the module with an expansion module

Wiring

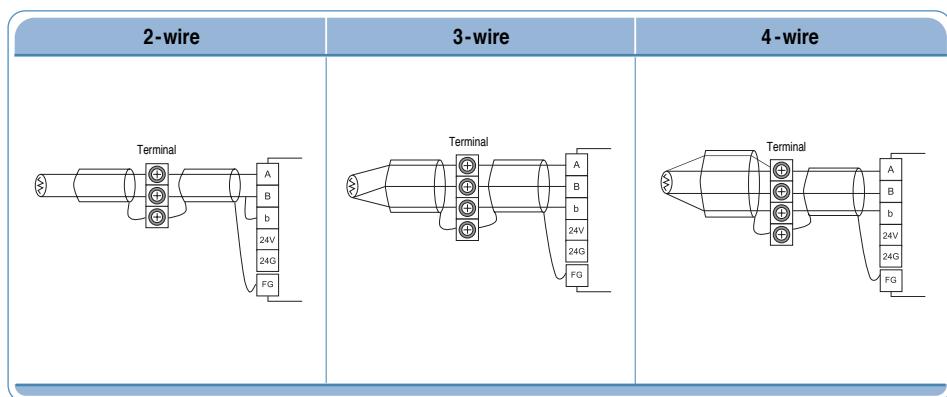

Specification

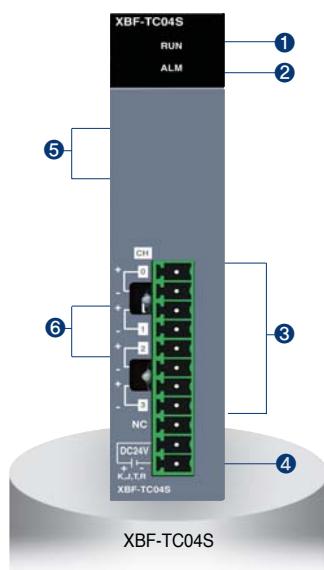


Item		XBF-TC04S
Number of channels		4
Input sensor type		Thermocouple K/J/T/R JIS C1602 -1995
Temperature input range	K	-200.0 °C ~ 1300.0 °C (-328.0 °F ~ 2372.0 °F)
	J	-200.0 °C ~ 1200.0 °C (-328.0 °F ~ 2192.0 °F)
	T	-200.0 °C ~ 400.0 °C (-328.0 °F ~ 752.0 °F)
	R	0.0 °C ~ 1700.0 °C (32.0 °F ~ 3092.0 °F)
Digital output	Temperature display unit	Display down to one decimal place K, J, T: 0.1 °C R: 0.5 °C
	Scaling display (Defined by user)	Unsigned scaling (0 ~ 65535) Signed scaling (-32768 ~ 32767)
	Accuracy	Normal temperature (25°C) ± 0.2% Temperature coefficient (0 ~ 55°C) ± 100 ppm / °C
Max. conversion speed		50ms / Channel
Warming-up time		15 minutes or more
Terminal		11-point terminal
I/O points occupied		64 points
Current consumption	DC 5V	100mA
	DC 24V	100mA


Names and Functions

No.	Name	Descriptions
①	RUN LED	▶ Displays the hardware operation status (Fatal fault) <ul style="list-style-type: none"> • On: Normal status • Flickering: Error (0.2s flickering) • Off: hardware error or power off
②	ALM LED	▶ Displays the status of the channels (Light fault) <ul style="list-style-type: none"> • Flickering: Line disconnection (1s flickering) • Off: Normal status
③	Terminal block	▶ Terminals to connect the thermo-couple sensor
④	External power terminal	▶ Terminals to supply the external DC 24V
⑥	RJC	▶ Device for Reference Junction Compensation

Wiring

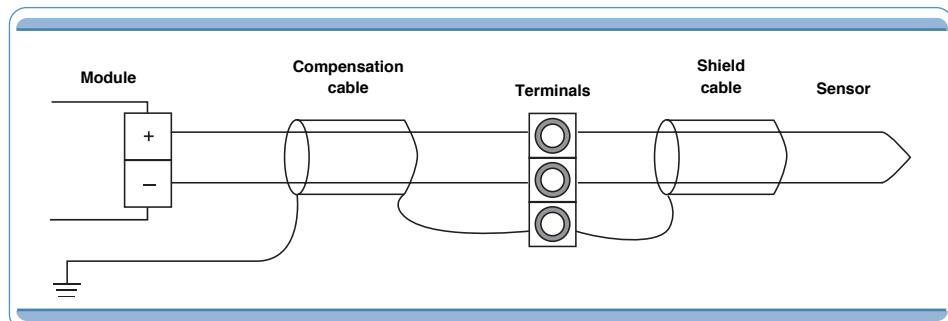


Specification

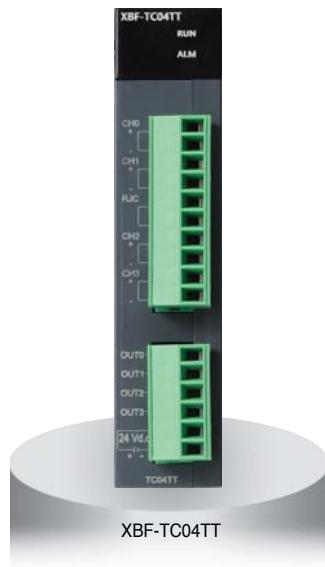


Item		XBF-TC04TT	
Control loop		4 loop	
Thermocouple type and input range	K	-200.0 ~ 1300.0 °C	
		0.0 ~ 500.0 °C	
	J	-200.0 ~ 1200.0 °C	
	T	0.0 ~ 500.0 °C	
Precision	Standard precision	±0.2% or less (25 °C, normal temperature, except -200~100 °C for the T type)	
	Temperature coefficient	±100ppm/°C(0.01%/°C)	
Cold junction compensation	Compensation method	Automatic compensation by RJC sensing	
	Compensation degree	±2.0 °C	
Sampling period		500ms/ 4 loop	
Control method		PID CONTROL, ON/OFF CONTROL	
Control parameter	Target value (SV)	Setting within range according to input type (temperature unit setting)	
	Proportional gain	0: ON/OFF CONTROL, REAL	
	Integral time	0: Except integral control, REAL	
	Derivative time	0: Except derivative control, REAL	
Transistor output	Output point	4	
	Rated load voltage	DC 24 V	
	Max. load current	0.1 A / Output point	
	Max. voltage drop when on	DC 1.2 V or less	
	Leakage current when off	0.1 mA or less	
	Response time	On => Off	1 ms or less
		Off => On	1 ms or less
	Control output cycle	0.5 ~ 120.0 sec (Setting unit: 0.5 sec.)	
Insulation	Between input channels	Photo relay	Withstanding voltage: 400V AC, 50/60Hz 1min, leakage current 10mA or less
	Input terminal-PLC power	Photo relay	Insulation resistor: 500V DC, 10 MΩ or above
	Output terminal-PLC power	Non-insulation	
	Between output channels		
Averaging function	Weighted average	0 ~ 99% (setting range)	
	Moving average	0 ~ 99 times (setting range)	
Warm-up		20 minutes or above	
Maximum rate of ambient temperature changing		0.5 °C/min (30 °C/hour) or less	
Access terminal		16 point terminal (10 point terminal 1ea, 6 point terminal 1ea)	
IO occupation point		Fixed: 64 points	
Max. no. of installation		XBM-DxxxS type: 7ea, XB(E)C-DxxxH type: 10ea, XB(E)C-DxxxSU: 7ea, XB(E)C-DxxxU: 10ea	
Power supply		5 V, DC 24 V	
Current consumed		Internal DC 5 V : 120 mA, External DC 24 V : 100 mA	

Specification

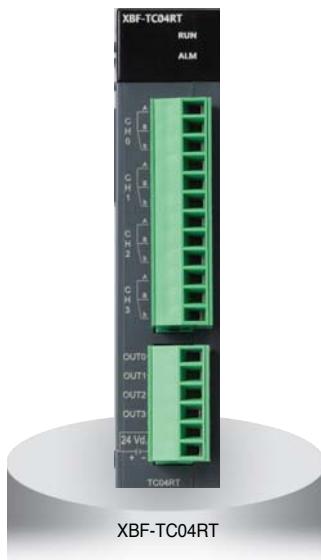

Item		XBF-TC04RT	
Control loop		4 loop	
RTD type and input range	Pt100	-200.0 ~ 850.0 °C	
	JPt100	-200.0 ~ 600.0 °C	
Precision	Standard precision	±0.2% or less (25 °C, normal temperature)	
	Temperature coefficient	±100ppm/ °C (0.01%/ °C)	
Sampling period		500ms/ 4 loop	
Control method		PID CONTROL, ON/OFF CONTROL	
Control parameter	Target value (SV)		Setting within range according to input type (temperature unit setting)
	Proportional gain		0: ON/OFF CONTROL, REAL
	Integral time		0: Except integral control, REAL
	Derivative time		0: Except derivative control, REAL
Transistor output	Output point		4
	Rated load voltage		DC 24 V
	Max. load current		0.1 A/Output point
	Max. voltage drop when on		DC 1.2 V or less
	Leakage current when off		0.1 mA or less
	Response time	On => Off	1 ms or less
		Off => On	1 ms or less
	Control output cycle		0.5 ~ 120.0 sec (Setting unit: 0.5 sec.)
	Time proportional resolution		Larger one of either 10 ms or 0.05% of the full-scale
Insulation	Between input channels		Withstanding voltage: 1500V AC, 50/60Hz 1min, leakage current 10mA or less
	Input terminal- PLC power		Photo relay Insulation resistor: 500V DC, 10 MΩ or above
	Output terminal- PLC power Between output channels		Non-insulation
Averaging function	Weighted average		0 ~ 99% (setting range)
	Moving average		0 ~ 99 times (setting range)
Access terminal		18 point terminal (12 point terminal 1ea, 6 point terminal 1ea)	
IO occupation point		Fixed: 64 points	
Max. no. of installation		XBM-DxxxS type: 7ea, XB(E)C-DxxxH type: 10ea, XB(E)C-DxxxSU: 7ea, XB(E)C-DxxxU: 10ea	
Power supply		5 V, DC 24 V	
Current consumed		Internal DC 5 V : 120 mA, External DC 24 V : 100 mA	


Specification

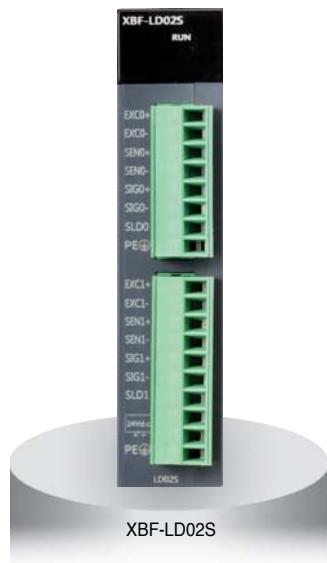

XBF-LD02S

Item	Specifications					
Input Channel	2 Channel (Insulation between Channels)					
Load Cell Input Voltage	5VDC ±5%, (8 per 350 Ω load cell channel)					
Load Cell Type	Four-wire or Six-wire					
Resolution	1/40000					
Analog Input Range	0.0~6.0 mV					
Load Cell Output Sensitivity	0.125 μV/(when the rated output of the load cell is 0.0 ~ 1.0 mV/ V)					
Input Accuracy	±0.01% or below (nonlinear accuracy, 25°C) Zero Drift: ±0.25°C, Gain Drift: ±15ppm//°C					
Sampling Cycle (per channel)	5 ms					
	Classification	Insulation Method	Insulation Voltage Resistance (Internal Test Specifications)	Insulation Resistance		
Insulation	Input terminal-Internal circuits	Isolator	AC 550 V 50/60 Hz 1 minute, Leakage 10 mA or below	DC500 V, 10 MΩ or above		
	Between input channels	Transformer				
	External power-Internal circuits	DC/DC Converter				
Warm-up time	30 minutes or above					
Input Connector	8 pins Connector(CH0)/10 pins Connector(CH1)					
IO Occupation Points:	Fixed type:64 points					
Max. no. of installation	XBM-DxxxS type: 7ea, XB(E)C-DxxxH type: 10ea, XB(E)C-DxxxSU: 7ea, XB(E)C-DxxxU: 10ea,					
Power Supply	5V, DC 24					
Consumption	Internal DC5V : 110 mA, External DC24V : 280 mA					

Specification

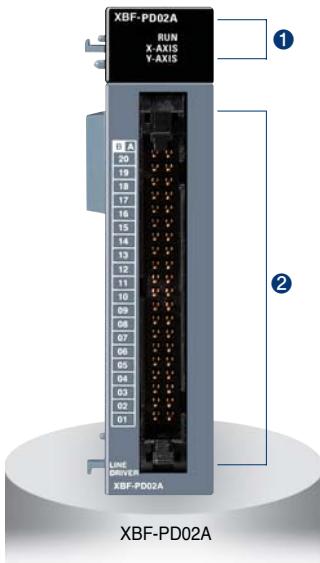


Item	XBF-PD02A												
No. of control axis	2 axis												
Pulse output type	Line drive												
Max. pulse output	2Mpps												
Max. connection length	10m												
Control mode	Position control, Speed control, Speed /Position switching control, Position /Speed switching control												
Interpolation	Linear interpolation, Circula interpolation												
Positioning data	150 operation data for each axis												
Configuration tool	Built-in function parameter of XG5000												
Back-up	Flash memory												
Positioning	<table border="1"> <tr> <td>Positioning method</td><td>Absolute/Incremental method</td></tr> <tr> <td>Unit</td><td>pulse</td></tr> <tr> <td>Positioning range</td><td>-2,147,483,648 ~ 2,147,483,648</td></tr> <tr> <td>Speed range</td><td>1 ~2,000,000 (pulse/sec)</td></tr> <tr> <td>Acceleration/Deceleration type</td><td>Trapezoidal acceleration/deceleration</td></tr> <tr> <td>Acceleration/Deceleration time</td><td>0~65,535ms, Asymmetric acceleration/deceleration</td></tr> </table>	Positioning method	Absolute/Incremental method	Unit	pulse	Positioning range	-2,147,483,648 ~ 2,147,483,648	Speed range	1 ~2,000,000 (pulse/sec)	Acceleration/Deceleration type	Trapezoidal acceleration/deceleration	Acceleration/Deceleration time	0~65,535ms, Asymmetric acceleration/deceleration
Positioning method	Absolute/Incremental method												
Unit	pulse												
Positioning range	-2,147,483,648 ~ 2,147,483,648												
Speed range	1 ~2,000,000 (pulse/sec)												
Acceleration/Deceleration type	Trapezoidal acceleration/deceleration												
Acceleration/Deceleration time	0~65,535ms, Asymmetric acceleration/deceleration												
Max. encoder input	200kpps (Line drive)												
Error/Operation	LED												
I/O occupied points	Fixed type: 64 points												
Connection terminal	40pin connector												
Current consumption (mA)	500												

Names and Functions


No.	Name	Descriptions
①	RUN LED	<p>1. RUN</p> <p>▶ Displays the hardware operation status</p> <ul style="list-style-type: none"> • On: Normal status • Off: Abnormal status <p>2. X_AXIS, Y_AXIS</p> <ul style="list-style-type: none"> • On: Operation • Flickering: Error
②	Terminal block	▶ Terminals to connect the MPG, external device and drive device.

Terminal

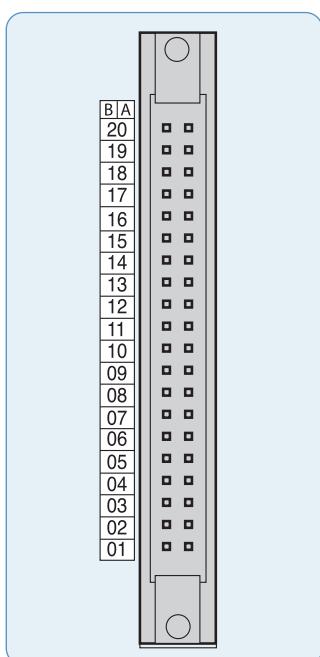

Pin number		Signal name	
X axis	Y axis		
	B20	MPG A +	Manual Pulse Generator/Encoder A+ input
	A20	MPG A -	Manual Pulse Generator/Encoder A- input
	B19	MPG B +	Manual Pulse Generator/Encoder B+ input
	A19	MPG B -	Manual Pulse Generator/Encoder B- input
A18	B18	FP +	Forward pulse +
A17	B17	FP -	Forward pulse -
A16	B16	RP +	Reverse pulse +
A15	B15	RP -	Reverse pulse -
A14	B14	OV +	High limit
A13	B13	OV -	Low limit
A12	B12	DOG	Near point
A11	B11	NC	-
A10	B10		
A09	B09	COM	Common
A08	B08	NC	-
A07	B07	INP	Inposition signal
A06	B06	INP COM	Inposition signal common
A05	B05	CLR	Deviation counter clear signal
A04	B04	CLR COM	Deviation counter clear signal common
A03	B03	HOME +5V	Zero signal(DC 5V)
A02	B02	HOME COM	Zero signal Common
A01	B01	NC	-

Specification

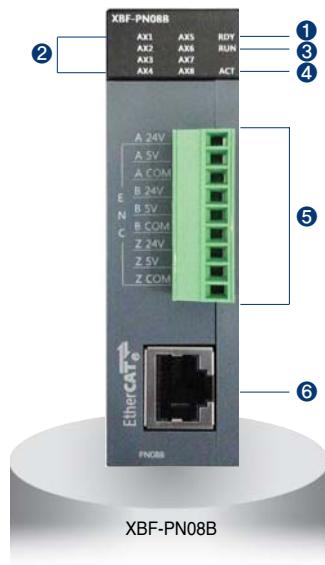

Item		XBF-PN08B			
No. of control axis		8			
Interpolation function		2~8 axes linear interpolation, 2 axes circular interpolation, 3 axes helical interpolation			
Control method		Position control, Speed control, Speed/Position control, Position/Speed control, Position/Torque Control, Feed control			
Control unit		Pulse, mm, inch, degree			
Positioning data		Each axis can have up to 400 operation data .(Operation step number : 1~400) Available to set with XG-PM or program			
XG-PM	Connection	RS-232C port of CPU module or USB			
	Setting data	Common, Basic, Extended, Servo parameter, Operation data, Cam data, Command information			
	Monitor	Operation information, Trace, Input terminal information, Error information			
Back-up		Save the parameter, operation data in MRAM ROM (No need of Battery)			
Positioning	Positioning method	Absolute method/Incremental method			
			Absolute	Incremental	Speed/Position, Position/Speed Switching control
	Position address range	mm	-214748364.8~214748364.7(μ m)	-214748364.8~214748364.7(μ m)	-214748364.8~214748364.7(μ m)
		Inch	-21474.83648~21474.83647	-21474.83648~21474.83647	-21474.83648~21474.83647
		degree	-21474.83648~21474.83647	-21474.83648~21474.83647	-21474.83648~21474.83647
		pulse	-2147483648~2147483647	-2147483648~2147483647	-2147483648~2147483647
	Speed range	mm	0.01~2000000.00(BE/min)		
		Inch	0.001~200000.000(Inch/min)		
		degree	0.001~200000.000(degree/min)		
		pulse	1~20,000,000(pulse/SEC)		
Acc./Dec. process	Trapezoid type, S-type				
	Acc./Dec. time	1~2,147,483,647ms selection is available from 4 types of acceleration/deceleration pattern			
Manual Operation		Jog Operation, MPG Operation, Inchng Operation			
Homing method		Refer to the method supported by the servo driver			
Speed change function		Speed change (Percent/Absolute value)			
Torque unit		Rated torque % designation			
Absolute position system		Available (when using absolute encoder type servo driver)			
External Encoder input	Channel	1 channel			
	Max. Input	200 kpps			
	Input form	Line drive input (RS-422A IEC specification), open collector output type encoder			
	Input type	CW/CCW, PULSE/DIR, Phase A/B			
	Connection connector	9-point connector			
Communication Period		1ms			
Max. transmission distance		100m			
Communication cable		Over CAT.5 STP (Shielded Twisted-pair) cable			
Error indication		Indicated by LED			
Communication status indication		Indicated by LED			
Consumable current		510mA			
Weight		115g			

Names and Functions

No.	Name	Descriptions
①	Module ready signal	On: Positioning module normal status Off: Power OFF or CPU module reset status Flicker: Positioning module abnormal status
②	Operation indicator LED (AX1 ~ AX8)	On: applicable axis is running Off: applicable axis is stop status Flicker: applicable axis is error status
③	Communication status indicator LED	On: communication with servo driver is connected Off: communication with servo driver is disconnected Flicker: Error occurs during communicating with servo driver
④	TRX status LED	On: Wiring with servo driver is done Off: Wiring with servo driver is not done Flicker: communicating with servo driver
⑤	Connector for encoder wiring	Connector to connect with encoder
⑥	RJ-45 connector	RJ-45 connector to connect with servo driver

Terminal

Pin arrangement	Pin No.	Signal name		Signal direction
A 24V	1	A 24V	Encoder A 24V input	Input
A 5V	2	A 5V	Encoder A 5V input	
A COM	3	A COM	Encoder A input COM	
B 24V	4	B 24V	Encoder B 24V input	
B 5V	5	B 5V	Encoder B 5V input	
B COM	6	B COM	Encoder B input COM	
Z 24V	7	Z 24V	Encoder Z 24V input	
Z 5V	8	Z 5V	Encoder Z 5V input	
Z COM	9	Z COM	Encoder Z input COM	

Specification




Item	Specification	
	XBF-HO02A	XGF-HD02A
Count input signal	Signal	A-phase, B-phase
	Input type	Voltage input (Open Collector) Differential input (Line Drive):
	Signal level	DC 5V/12V/24V RS-422A Line Drive/HTL LEVEL Line Drive
Maximum coefficient speed	200kpps	500kpps (HTL input : 250kpps)
Number of channels	2 Channels	
Coefficient range	Signed 32-bit (-2,147,483,648 ~ 2,147,483,647)	
Count mode	Linear Count (When 32-bit range exceeded, Carry /Borrow occurs, The count value stopped) Ring Count (Repeated count within setting range)	
Input pulse mode	1-phase input	1-phase input
	2-phase input	2-phase input
	CW/CCW	CW/CCW input
Up/down setting	1-phase input	Increasing/Decreasing operation setting by B-phase input Increasing/Decreasing operation setting by program
	2-phase input	Automatic setting by difference in phase
	CW/CCW	A-phase input: Increasing operation B-phase input: Decreasing operation
Multiplication function	1-phase input	1/2 multiplication
	2-phase input	1/2/4 multiplication
	CW/CCW	1-multiplication
Control input	Signal	Preset instruction input, Auxiliary mode instruction input
	Signal level	DC 5V/12V/24V (by terminal selection) input type
	Signal type	Voltage
External output	Output points	2-point/channel (for each channel): Terminal output available
	Type	Select single-compared (>, >=, =, <=, <) or section compared output (Included or excluded)
	Output type	Open collector output (Sink)
Operation status display	Input signal	A-phase input, B-phase input, Preset instruction input, Auxiliary mode instruction input
	Output signal	External output 0, External output 1
	Busy status	Module Ready
Count enable	To be set through program (Count available only in enable status)	
Preset function	To be set through terminal or program	
Auxiliary mode function	Count clear, Count latch, Section count(time setting value: 0~60000ms), Measurement of input frequency(for respective input phase), Measurement of counts per hour(time setting value: 0~60000ms) Count prohibited function	
Terminal	40 pin connector	
I/O occupied points	Fixed point: 64	
Current consumption(mA)	200	260
Weight	90g	

Names and Functions


No.	Name	Descriptions
①	Run LED (ØA, ØB, P, G, 00, 01)	► On: Relevant channel pulse inputting, Preset/Auxiliary function signal inputting, Outputting ► Off: No input of relevant channel pulse, No input of preset/Auxiliary function signal, No output of comparison
	Ready signal (RDY)	► On: HSC module normal ► Off: Power off or CPU module reset, HSC module error • Flicker: HSC module error
②	External wiring connector	Connector to connect with external I/O

Terminal (XBF-H002A)

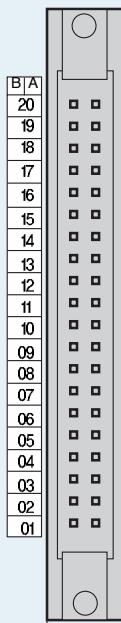


Pin arrangement		Signal name	
B ch1	A ch0		
20	20	A 24V	A phase pulse input 24V
19	19	A 12V	A phase pulse input 12V
18	18	A 5V	A phase pulse input 5V
17	17	A COM	A phase pulse input COM
16	16	B 24V	B phase pulse input 24V
15	15	B 12V	B phase pulse input 12V
14	14	B 5V	B phase pulse input 5V
13	13	B COM	B phase pulse input COM
12	12	P 24V	Preset input 24V
11	11	P 12V	Preset input 12V
10	10	P 5V	Preset input 5V
09	09	P COM	Preset input COM
08	08	G 24V	Auxiliary function input 24V
07	07	G 12V	Auxiliary function input 12V
06	06	G 5V	Auxiliary function input 5V
05	05	G COM	Auxiliary function input COM
04	04	OUT0	Comparison output 0
03	03	OUT1	Comparison output 1
02	02	24V	External power input 24V
01	01	24G	External power input GND

Terminal (XBF-HD02A)

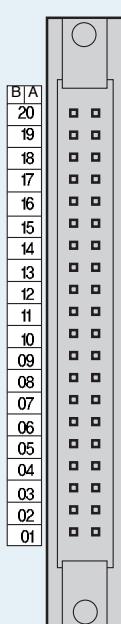

Pin arrangement		Signal name	
B ch1	A ch0		
20	20	A I +	A I phase differentiation input +
19	19	A I -	A I phase differentiation input -
18	18	A II +	A II phase differentiation input +
17	17	A II -	A II phase differentiation input -
16	16	B I +	B I phase differentiation input +
15	15	B I -	B I phase differentiation input -
14	14	B II +	B II phase differentiation input +
13	13	B II -	B II phase differentiation input -
12	12	P 24V	Preset input 24V
11	11	P 12V	Preset input 12V
10	10	P 5V	Preset input 5V
09	09	P COM	Preset input COM
08	08	G 24V	Auxiliary function input 24V
07	07	G 12V	Auxiliary function input 12V
06	06	G 5V	Auxiliary function input 5V
05	05	G COM	Auxiliary function input COM
04	04	OUT0	Comparison output 0
03	03	OUT1	Comparison output 1
02	02	24V	External power input 24V
01	01	24G	External power input GND

Ethernet (XBL-EMTA)

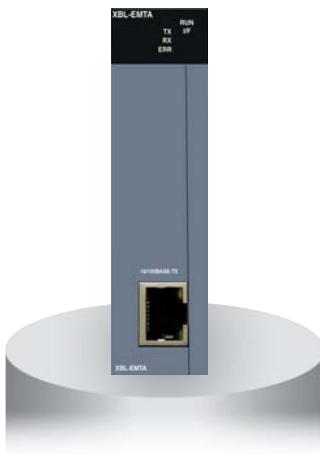

Item		XBL-EMTA
Communication spec.		10/100 Base-TX
Protocol		TCP/IP, UDP/IP
Service	With LS PLCs	High-speed link, P2P service
	With other devices	P2P service
Application		XGT Dedicated protocol Server/Client, Modbus/TCP Server/Client
HS link sending/Receiving data		200words/block (Max. 64blocks)
No. of channel Connectable to upper stage		6 channels
Service		Communication with PC (HMI) and external devices, High-speed communication among LSIS PLCs
Media		UTP/STP Category 5
Current consumption (mA)		300

RS-232C, RS-422 / 485



Item		Built-in RS-232C	XBL-C21A	Built-in RS-485	XBL-C41A
Interface		RS-232C 1ch	RS-232C 1ch	RS-485 1ch	RS-422 / 485 1ch
MODEM function		Remote communication via the external MODEM (XBL-C21A Only)			
Mode	Dedicated mode	1:1 or 1:N via the dedicated protocol			
	XG5000 mode	Program download, Upload and control via the remote control			
	P2P mode	Communication defined by the protocol using XG-PD XGT/Modbus master			
Operation mode	Server (slave)	XGT/Modbus server, User-defined communication			
	Client (master)	XGT/Modbus P2P Master, User-defined communication			
Data format	Start Bit	1			
	Data Bit	7 or 8			
	Stop Bit	1 or 2			
	Parity	Even / Odd / None			
	Setting	Setting by XG-PD parameter			
Synchronous		Asynchronous			
Speed (bps)		1,200/2,400/4,800/9,600/19,200/38,400/57,600/115,200 bps			
Station number		Setting by XG-PD, Max. 32 stations			
Distance		RS-232C: Max.15m (Expansion by MODEM), RS-422/485: Max 500m			
MODEM communication		-	Support	-	-
Network		1 : 1		1 : N	
Diagnostic		Via LED and XG-PD			
Max. expansion		Built-in	2 stages	Built-in	2 stages

RAPIEnet (XBL-EIMT)



Item		XBL- EIMT
Transmission standard	Transmission speed	100Mbps
	Transmission method	Base band
	Max. extension distance between nodes	100m
	Max. number of nodes	64
	Max. protocol size	1,516 bytes
	Access method to service zone	CSMA / CD
	Frame error check	CRC 32 = $X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
	Normal communication guarantee	Max. 1,200 (packet/sec)
Basic standard	Dimension (mm)	90(H) x 27(W) x 60(D)
	Current consumption(mA)	290
	Weight (g)	102

Ethernet/IP (XBL-EIPT)



Item		XBL- EIPT
Transmission standard	Transmission speed	100Mbps
	Transmission method	Base band
	Max. extension distance between nodes	100m
	Access method to service zone	CSMA/CD
	Frame error check	$CRC\ 32 = X^{32} + X^{26} + X^{23} + \dots + X^2 + X + 1$
Topology		Line, Star
The number of connections (Client/Server)	TCP	16 / 32
	CIP (IO communication)	32 / 64
Number of Max. services (P2P)		2
Number of Max. installations		2
Basic standard	Max. setting data size per block	500 bytes
	Aperiodic client	512 bytes
	Dimension (mm)	90(H) x 27(W) x 60(D)
Basic standard	Current consumption(mA)	290
	Weight (g)	102

Profibus-DP Module (XBL-PMEC, XBL-PSEA)



Item		XBL-PMEC	XBL-PSEA
Module Type		Slave	
Network Type		Profibus-DP	
Standard		EN501170/DIN19245	
Interface		RS-485 (Electric)	
Topology		Bus type	
Modulation Type		NRZ (Non Return to Zero)	
Protocol		Profibus DP-V0	
Max. Distance & Transmission Speed	Distance (m)	Send Speed (bps)	
	1,200	9.6k/19.2k/93.75k/187.5k	
	400	500k	
	200	1.5M	
	100	3M/6M/12M	
Max. number of stations per segment		32 (including master & repeater)	
Cable used		Electric-twist shielded pair cable	
Max. Communication size		Input : 122 Word Output : 122 Word	
Max. Communication size per block		Input : 64 Word Output : 64 Word	
Communication Transmission cycle		10/20/50/100/200/500ms, 1/5/10s	
Communication Receive cycle		Main unit scan × 2 + Data receive time + Communication module scan	
Max. number of units installed		2 units	
Communication Parameters to set		XG5000 (setting station and high-speed link parameter block)	
Internal-consumed current (mA)		300	250
Weight (g)		86 (including connector: 122)	

**DeviceNet Module
(XBL-DSEA)**


Item		XBL-DSEA
Transmission Specification		125/250/500
Transmission Speed (kbps)		125/250/500
Transmission Type		Poll, Bit strobe, COS, Cyclic
Communication distance (m)	Thick Cable	500 (125kbps)/250 (250kbps)/100 (500kbps)
	Thin Cable	100 (125/250/500kbps)
Terminal resistance (Ω)		121 (1%, 1/4W)
Max. drop length (m)	125 kbps	6 (Max. extended length 156)
	250 kbps	6 (Max. extended length 78)
	500 kbps	6 (Max. extended length 39)
Data Packet		0~8 Bytes
Message Access Control		CSMA/NBA
Network Structure		<ul style="list-style-type: none"> • Trunk/drop line • Power/Signal cable inside the identical network cable
Bus Type		• Poll type
Max. number of nodes		Up to 64 (including master) MAC IDs (MAC Identifier)
System Features		Insertion and removal of nod available in voltage On status
Operation Voltage		DC 24V
Diagnosis Function		Module: Checks duplicated station/ Checks CRC error SyCon: Detects defective station/Checks BusOff/Auto-scan function XG5000: Monitors High-speed link
Master/Slave Operation		Available only in slave
Parameter setting		Setting to High-speed link of XG5000 (RS-232C of CPU module or USB port)
XG5000 (High-speed link) Basic Specification	Data process unit	Word
	Send/Receive period	Select among 10ms, 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s and 10s - Default : 20ms
	Max. communication point	Send 2048points, Receive 2048 points, 256 bytes respectively
	Max. block number	64 (Setting range: 0~63)
	Max. point number per block	1024 points (64 Words)
	Max. modules installed	Up to 2
	Internal-consumed current (mA)	100mA
Weight (g)		110

**Rnet
(XBL-RMEA)**


Item		XBL-RMEA
Transmission Speed		1Mbps(Rnet I/F modules common)
Max. Tx distance		Max. 750m
Connection Cable		Twisted pair shielded cable
Maximum stations connected	Network	Master station 1[station no:0(fixed)] + Slave stations up to 31[station no:1~63], Note 1 - Only 1 master is available in the network.
Diagnostic function		XG5000 : High Speed Link Monitoring
Terminal resistance (Ω)		110 Ω (±5%), 1/2W
Master/Slave operation		Only available as Master
XG5000(HS Link) Specification	Data Processing unit	Byte
	Tx/Rx cycle	Selection among 20ms, 50ms, 100ms, 200ms(default), 500ms, 1s, 5s, 10s
	Max. Communication points.	3,780 Bytes (slave 31stations * 120Bytes/station)
	Max. Block number	64 (setting range : 0~63)
	Max. points by Block	120 Byte (60words)
	Auto scanning	Supported
	Max. module mounted	2 modules

CANopen Module
(XBL-CMEA, XBL-CSEA)


Item		XBL-CMEA	XBL-CSEA
Transmission Speed		10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps	
Num. of port		1	
Max. node		32	
PDO	TPDO	Total 32	64
	RPDO		64
Max. size of data per PDO		8Byte	
PDO transfer type		Synchronous acyclic (0), synchronous cyclic (1~240), RTR (252~253), time-event trigger(254~255)	
Support SDO		Client 127/Server 1	Server 1
SDO transfer type		Expedited, Normal	-
Access method		CSMA/BA (Carrier Sense Multiple Access/Bitwise Arbitration)	
Topology		BUS	
SYNC Service		Producer Cycle : 20~5000ms	Consumer
NMT. eode control		NMT master	NMT slave
Emergency		Save the last five per slave	Save up to last 10
NMT. error control		Heartbeat, Life guarding	Heartbeat
Network scan		O	-
Size (mm)		90 (H)X27 (W)X60 (D)	
Current consumption (mA)		211	202
Weight (g)		78	


Option modules



Option modules

XBO-AD02A	Voltage/Current, Input 2 chs
XBO-DA02A	Voltage/Current, Output 2 chs
XBO-AH02A	Voltage/Current, Input 1 ch
	Voltage/Current, Output 1 ch
XBO-TC02A	TC (Thermocouple), Input 2 chs
XBO-RTCA	RTC (Real Time Clock)
XBO-DC04A	DC 24V, Input 4 points
XBO-TN04A	Transistor (Sink), Output 4 point
XBO-RD01A	RTD (Resistance Temperature Detect, Input 1 ch)

Smart link

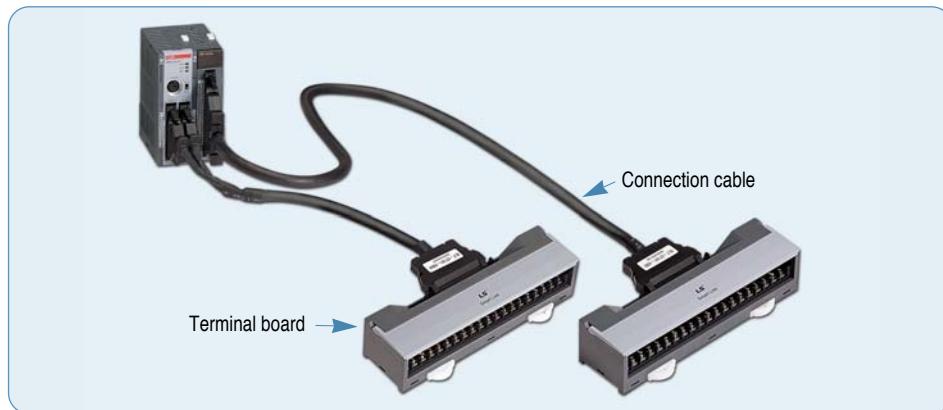


Connection cable	XBF-PD02A	XBF-HO02A	XBF-HD02A	XBE-DC32A	XBE-TN32A	XBE-TP32A	XBM-DN16S	XBM-DN32S	XBM-DN32H	XBM/XEM-DN32HP (H2)	XGB-UP
R40H/20HH-05S-XBM3	-	-	-	-	-	-	●	●	-	-	-
R40H/20HH-10S-XBM3	-	-	-	-	-	-	●	●	-	-	-
C40HH-05SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-10SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-15SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-20SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-30SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-05SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-10SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-15SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-20SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-30SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-05SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-10SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-15SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-20SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-30SB-XBE	-	-	-	-	●	-	-	-	-	-	-

Software

Programmable Logic Controller


XG5000 (Programming software)

- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-programming support
- Various monitoring and diagnosis functions
- Vista 2000, XP (Limited use in Windows 98, ME)

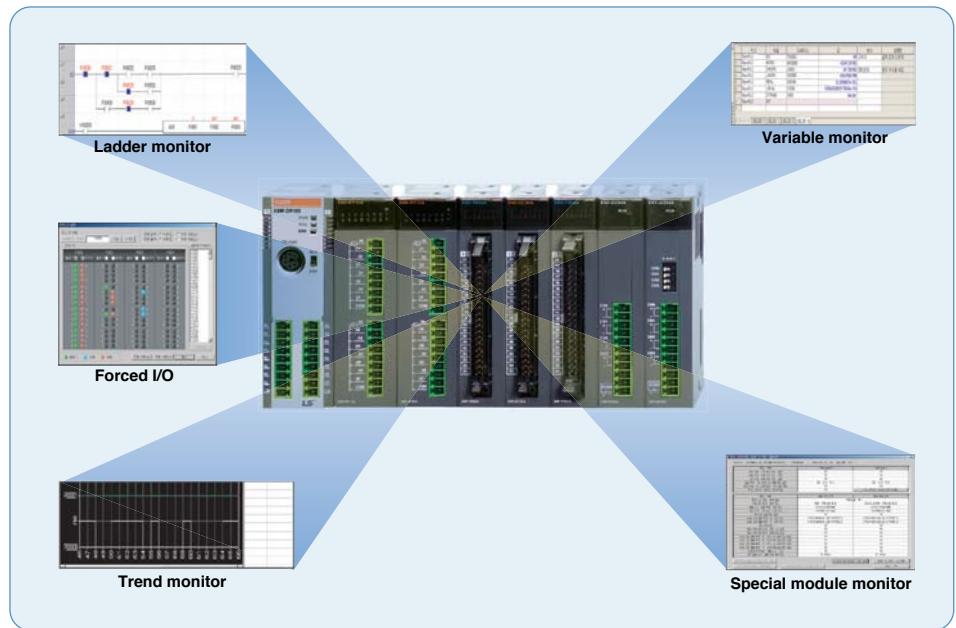

XG -PD (Network setting software)

- Convenient network setting
- Extended monitoring function for network system and communication modules
- Fast interface with CPU by effective network management
- Various built-in diagnosis, functions
(CPU condition, Link condition, Service condition, Frame monitoring)

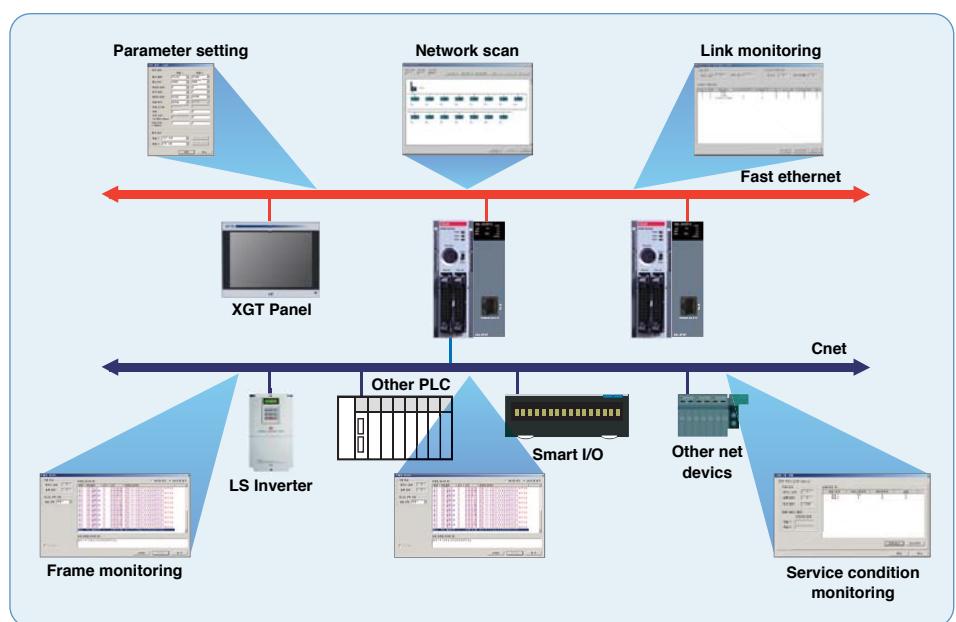

Main Specification

- Aluminum body frame, responsive touch screen.
- Easy-to-use Multi-touch, gesture, dual screen, portrait mode.
- Multi connected with 1Gbits 2ch.
- Ethernet between PC to PLC.
- Various interfaces : USB host /device, SD card, HDMI.
- High resolution : 1024 X 768
- IP66, UL type 4x, NEMA 4x standards



Item	iXP2-0800A/D	iXP2-1000A/D	iXP2-1200A/D	iXP2-1500A/D
Display type		TFT color LCD		
Screen size	8.4"	10.4"	12.1"	15"
	800×600 pixel	-	10240×7680 pixel	-
Color indication		32-bits true color (16.7M)		
Backlight		LED, Auto On/Off		
Backlight duration		50,000 hours		
Touch panel		Capacitive touch	60,000 hours	
Process		700 cd/m ² 1GHz, Dual-Core CPU550 cd/m ²		
Memory	Flash Operating RAM Backup RAM		1GByte 1GByte 1MByte	
Backup data		Date/Hour data, Logging/Alarm/Recipe data and nonvolatile device		
Battery duration		Approx. 3 years (Operating ambient temperature of 25°C/77 °F)		
Memory	Video out Sound out Ethernet USB host USB device Serial		1 × HDMI 1 × Line-Out 1 × 10/100Base-TX, 1 × 10/100/1000Base-TX 3 × USB 2.0 (Front × 1, Rear x 2) 1 × USB 2.0 ((Front, for download an upload project data)) 1 × RS-232C (D-SUB 9/Male type), 1 × RS-422/485 (Isolated, Terminal block)	
Certifications		IP66, Conform to the UL type 4x, NEMA 4x standard		
Protection standard			CE, UL (cUL), KC	
Dimension (mm)	240.0×180.0×59.7	270.5×212.5×59.7	313.0×239.0×59.7	395.0×294.0×65.5
Panel cut (mm)	228.5×158.5	259.0×201.0	301.5×227.5	383.5×282.5
Power		iXP2-xxxxA : AC100/240V, iXP2-xxxxD : DC24V		
Weight(Kg)	1.87	2.35	3.1	4.6

XGT Panel iXP Series

Programmable Logic Controller

Main Specification

- 1GHz 32bit RISC Embedded CPU
- 16,777,216 TFT color LCD
- 128MB display data and 1MB back-up memory
- Ethernet 1ch, RS-232C 2ch, RS-422/485 1ch
- USB host 3ch and device 1ch
- SD memory card interface

Main Functions

- PLC ladder monitoring (XGK/XBC PLC only)
- Web Server/Data Server
- Path through
- XP-Remote : Remote controlling and monitoring



Item	iXP50-TTA/DC	iXP70-TTA/DC iXP70-TTA/AC	iXP80-TTA/DC iXP80-TTA/AC	iXP90-TTA/DC iXP90-TTA/AC
Display type		TFT color LCD		
Screen size	21.3cm (8.4")	26.4cm (10.4")	30.7cm (12.1")	38.1cm (15")
Display Resolution	800×600 pixel(SVGA)	800×600 pixel(SVGA)	800×600 pixel(SVGA)	1,024×768 pixel(SVGA)
Color indication		16-bit and 24-bit Color (default: 16-bit Color)		
Indication degree	Left/Right: 80 deg. Up: 80 deg. Down: 60 deg.		Left/Right: 80 deg. Up: 60 deg. Down: 80 deg.	
Backlight		LED Type		
Backlight duration	70,000 hours		60,000 hours	
Brightness	500 cd/m ²	700 cd/m ²	550 cd/m ²	800 cd/m ²
Touch panel		4-Line type, analog		
Sound Output		Magnetic buzzer (85dB)		
Process		ARM Cortex-A8 Core (32bit RISC), 1GHz		
Memory	Flash 512MB(display 128MB) Operating RAM 256MB Backup RAM 1MB		1GB(display 128MB) 512MB	
Backup data		Date/Hour data, Logging/Alarm/Recipe data and nonvolatile device		
Battery duration		Approx. 3 years (Operating ambient temperature of 25°C)		
Ethernet		1 channel, 10/100BASE-TX		
USB Host		3 channels, USB 2.0 host (mouse, keyboard, printer* and USB memory driver is available)		1 channel, USB 2.0 slave (for download and upload project file)
RS-232C			1 channel	
RS-422/485			1 channel, RS-422/485 mode	
SD Card			1 Slot (SDHC)	
Human sensor	-	Detection range: side 1-1.5m, front 40-50cm Angle: high/low 100°, left/right 140° (detecting 5-20 micron infrared light)		
Audio output		LINE-OUT 1 channel		
Expansion module		For communication and I/O option module (available later)		
VM module	-	4 channels video input (available later)		
Multi-language		Up to 12 language simultaneously		
Animation		GIF format is available		
Recipe		available		
Data logging		available		
Script executor		available		
Certifications		CE, UL(cUL), KC		
Protection standard		IP65		
Dimension (mm)	240.5×180.0×54.4	270.5×212.5×60.0	313.0×239.0×56.0	395.0×294.0×60.0
Panel cut (mm)	228.5×158.5	259.0×201.0	301.5×227.5	383.5×282.5
Rated voltage	DC24V		DC12/24V(AC 100-240V)	
Power consumption (W)	30.8	42.3	42.3	42.3
Weight(Kg)	1.9	2.2	2.4	3.9

*SEWOO printer only

Main Specification

- TFT LCD-applied wide type
- LED Backlight adopted for enhanced contrast ratio and low-power
- PLC Ladder monitoring function: Only XGK/XBC supports*
- Web Server* / Data Server* / Path-Through Function*
- Remote Viewer Function*
- Screen editor : XP-Builder

* Functions that support only the TTA model



Item	eXP20-TTA/DC, CERTI	eXP20-TTA/DC	eXP30-TTA(B)/DC	eXP30-TTE/DC	eXP40-TTE/DC	eXP40-TTA(B)/DC	eXP40-TTA/DC, CERTI	eXP60-TTA(B)/DC	eXP60-TTA/DC, CERTI																				
Display type	TFT color LCD																												
Screen size	10.9cm (4.3inch)		14.2cm(5.6inch)		17.8cm(7inch)		25.9cm(10.2inch)																						
Display Resolution	480×272 pixel		640 x 480 pixel		600 x 800 pixel(WVAG)																								
Color indication	24-bit Color(16.7M)		16-bit Color(65,536 Color)		24-bit Color(65,535 Color)		16-bit Color(65,536)																						
Indication degree	Left/Right:60 deg. Upper:40 deg. Lower:60 deg.						Left/Right:55 deg. Upper:35 deg. Lower:55 deg.																						
Backlight	LED Type (Supports backlight auto-off function)																												
Backlight duration	30,000 hours		20,000 hours																										
Touch panel	4-Wire Resistive, analog																												
Audio output	Magnetic buzzer (85dB)																												
Process	i.MX283(454MHz)																												
Memory	Flash	128MB(Screen 64MB)																											
	Operation RAM	128MB																											
	Backup RAM	128KB																											
Backup data	Date/Hour data, Logging/Alarm/Recipe data and nonvolatile device																												
Battery duration	Approx. 3 years (Operating ambient temperature of 50°C)																												
RTC	Time error Approx. 3 sec/1day(Operating ambient temperature of 25°C)																												
Ethernet	1 channel, IEEE802.1a, 10Base-T/100Base-TX			-		1 channel, IEEE802.1a, 10Base-T/100Base-TX																							
USB Host	1 channel, USB 2.0 Host (mouse, keyboard, printer and USB memory driver is available)																												
USB Device	-		1 channel, USB 2.0 Device (for download and upload project)																										
RS-485, RS-232C	1channel, RS-232C (DSUB 9/Male Type)				2channels, RS-485, RS-232C (DSUB 9/Male Type)																								
RS-422/485	1channel, RS-422/485 (DSUB 9/Male Type)				1channel, RS-422/485 mode (Terminal Type)																								
Multi-language	Up to 12 language simultaneously																												
Animation	GIF format is available																												
Recipe	available																												
Data logging	available																												
Script executor	available																												
Certifications	CE, UL Type4X, KC	CE, UL(cUL), KC				CE, UL Type4X, KC	CE, UL(cUL), KC	CE, UL Type4X, KC																					
Protection standard	IP66	IP65				IP66	IP65	IP66																					
Dimension (mm)	128 ×102 ×32		300 ×200 ×68		208.0 ×154.0 ×44.4		276.0 ×218.0 ×44.4																						
Panel cut (mm)	119 ×93		156.0 ×123.5		192.0 ×138.0		260.0 ×202.0																						
Rated voltage	DC24V																												
Power consumption (W)	4.6W		7.2W		6.5W		10W																						
Weight(Kg)	0.3		0.42	0.39	0.62	0.63	1.08																						

* SEWOO printer only

XGT Panel XP Series

Programmable Logic Controller

Graphic type XP30/XP40/XP50/XP70/XP80/XP90

- High and vivid distinction with 65,536 colors
- High quality raster and vector symbols
- Various BMP JPG GIF graphic file support: BMP, JPG, GIF, WMF, etc
- Simple animation effects: animated GIF
- 10/100BASE-T Ethernet interface
- Convenient and easy screen editing
- Strengthened data management: Logging, Recipe, and Alarm
- Read function of a controller's state information: Monitoring and maintenance
- Multi-lingual display: up to 8 languages
- Offline and concurrent simulation with XG5000
- Easy to change the address of the graphic objects: Tag function with XGT Panel
- USB host for peripheral devices: USB Drive, Mouse, keyboard, printer, etc
- Sufficient memory for screen data: 10MB




CE **KC** **cUL** US LISTED

Model Type	XP30-BTE/DC	XP30-BTA/DC	XP30-TTE/DC	XP30-TTA/DC	XP40-TTE/DC	XP40-TTA/DC	XP50-TTA/DC	XP70-TTA/AC XP70-TTA/DC	XP80-TTA/AC XP80-TTA/DC	XP90-TTA/AC							
	Mono						Color										
Display Element	Mono Blue LCD			TFT Color LCD													
Screen Size	14cm [5.7"]			17.7cm [7"]		21cm [8.4"]	26cm [10.4"]	31cm [12.1"]	38cm [15"]								
Resolution	320×240			800×480		640×480	800×600	1024×768									
Color	8-column Gray Scale		256 colors	65,536 colors	65,536 colors												
Backlight	LED mode						CCFL(can be replaced), Auto On/Off										
	50,000 hours			60,000 hours	30,000 hours		50,000 hours		60,000 hours								
Contrast	Adjustable		Fixed														
Brightness	230cd/m ²		600cd/m ²	280cd/m ²	480cd/m ²	430cd/m ²	400cd/m ²	450cd/m ²									
Viewing Angle	Up/Down[Degree]	20/40	80/80	70/70	50/60	50/60	45/65	45/75	60/50								
	Left/Right[Degree]	45/45	80/80		65/65	65/65	65/65	65/65	75/75								
Touch Panel	4-wire system, analogue			Analog resistive		8-wire system, analogue											
Movement LED	Green: Normal RUN [Monitoring & drawing data download] Red: Error [Communication error & drawing data error]																
Memory	Screen Data	4MB	10MB	4MB	10MB	4MB	10MB	10MB	20MB								
	Backup Data	128KB	512KB	128KB	512KB	128KB	512KB										
Ethernet	-	1ch, 10/100Base-T	-	1ch, 10/100Base-T	-	1ch, 10/100Base-T											
USB Interface	USB Host X 1	USB Host X 2	USB Host X 1	USB Host X 2	USB Host X 1		USB Host X 2										
Serial	RS-232C	2ch(1 port for PC communication)															
	RS-422/485	1ch, 422/485 optional mode															
CF Card Interface	-	CF card [TAPE-1]X1	-	CF card [TAPE-1]X1	-	-	CF card [TAPE-1]X1										
AUX Interface	-	Optional	-	Optional	-	-	Optional										
Certification	CE, UL, KC																
Protection	IP65 [Front Water Proof Structure]																
Size[W×H×D]mm	181 x 140 x 56.5	181 x 140 x 66.5	181 x 140 x 56.5	181 x 140 x 66.5	203.5 x 153.5 x 41.5	240 x 174 x 73	317 x 243 x 73	395 x 294 x 73									
Panel Cut [W×H]mm	155.0 x 123.5				192 x 138	228.5 x 158.5	294.5 x 227.5	383.5 x 282.5									
Weight (kg)	0.62	0.75	0.62	0.75	2.2	2.4	1.4	2.2	2.4	3.9							
Power	Rated Voltage	DC 24V						AC100~220V, DC 24V		AC100~220V							
	Permitted Voltage	AC DC	-						MIN 85 VAC, MAX 264 VAC								
	Power Consumption(W)	AC DC	MIN 19.2 VDC, MAX 28.8 VDC						21.8	31.9							
			-						20.1	25.7							

Text type XP10

- Screen: 192×64 Graphic STN LCD
- System RAM: 1000 words
- Flash memory: Program/Parameter back up
- Communication: Half-duplex comm.
 - Baud rate: 1200~115200 bps
 - Master/slave setting available
 - RS-232C/RS-485 2 CH separate to use
- Power requirements - 24 V input or 5 V direct input by LS PLC
- Various function key - ESC, ALM, SET, ENT, F1~F4, Arrow keys
- Panel Editor - Easy programming and H/W setting

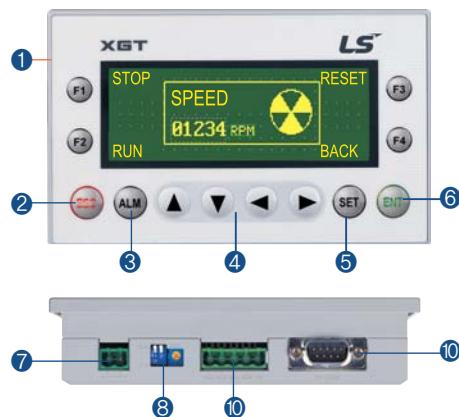

- ① Key to control PLC device and screen
- ② ESC key
- ③ Alarm history
- ④ Data input and Screen change
- ⑤ PLC data setting
- ⑥ Enter key
- ⑦ DC24V input terminal
- ⑧ RS-232C port to download a project
- ⑨ Brightness adjustment
- ⑩ RS-422 port

Item	Specifications	
	XP10BKA/DC	XP10BKB/DC
Input voltage	5VDC	DC 4.9 ~ 5.1 (RS-232C port)
	24VDC	DC 21.6 ~ 26.4 (DC Input connector)
	Consumption current	Less than 200mA
Display	LED back-light (192 x 64 Dots)	
Communication interface	RS-232C, RS-422/485	
Flash memory	256K bytes	
Language	Default: English, Can be switched to Korean/Chinese/Russian	
RTC	None	Supports
Download specification	115,200bps	
Keys	12 Keys (F1~F4, ESC, ALM, ▲, ▼, ▶, ▷, SET, ENT)	

Product list

Programmable Logic Controller

Product list

Item	Model	Specifications
Block type unit (U)	XBC/XEC-DN(P)32U	AC 110-220V, 16points DC24V input, 16points transistor sink(source) type output
	XBC/XEC-DR28U	AC 110-220V, 16points DC24V input, 12points relay output
	XBC/XEC-DN(P)32UP	AC 110-220V, 16points DC24V input, 16points transistor sink(source) type output, 4 axes built-in positioning
	XBC/XEC-DR28UP	AC 110-220V, 16points DC24V input, 12points relay output, 4 axes built-in positioning
	XBC/XEC-DN(P)32UA	AC 110-220V, DC24V input, 16points transistor sink(source) type output, 8 channel built-in analog
	XBC/XEC-DR28UA	AC 110-220V, DC24V input, 12points relay output, 8 channel built-in analog
	XBC/XEC-DN(P)32UDC	DC 24V, 16points DC24V input, 16points transistor sink(source) type output
	XBC/XEC-DR28U/DC	DC 24V, 16points DC24V input, 12points relay output
	XBC/XEC-DN(P)32UP/DC	DC 24V, 16points DC24V input, 16points transistor sink(source) type output, 4 axes built-in positioning
	XBC/XEC-DR28UP/DC	DC 24V, 16points DC24V input, 12points relay output, 4 axes built-in positioning
	XBC/XEC-DN(P)32UA/DC	DC 24V, DC24V input, 16points transistor sink(source) type output, 8 channel built-in analog
	XBC/XEC-DR28UA/DC	DC 24V, DC24V input, 12points relay output, 8 channel built-in analog
Block type unit (High performance)	XBC/XEC-DR32H	AC 100 - 240V, DC24 input 16 points, relay output 16 points
	XBC/XEC-DR64H	AC 100 - 240V, DC24 input 32 points, relay output 32 points
	XBC/XEC-DN32H	AC 100 - 240V, DC24 input 16 points, transistor output 16 points (Sink)
	XBC/XEC-DN64H	AC 100 - 240V, DC24 input 32 points, transistor output 32 points (Sink)
	XEC-DP32H	AC 100 - 240V, DC24 input 16 points, transistor output 16 points (Source)
	XEC-DP64H	AC 100 - 240V, DC24 input 32 points, transistor output 32 points (Source)
	XBC-DR32H/DC	DC 24V, DC24 input 16 points, relay output 16 points
	XBC-DR64H/DC	DC 24V, DC24 input 32 points, relay output 32 points
	XBC-DN32H/DC	DC 24V, DC24 input 16 points, transistor output 16 points (Sink)
	XBC-DN64H/DC	DC 24V, DC24 input 32 points, transistor output 32 points (Sink)
	XEC-DR32H/D1	DC 12/24V, DC12/24 input 16 points, relay output 16 points
	XEC-DR64H/D1	DC 12/24V, DC12/24 input 32 points, relay output 32 points
Block type unit (Standard)	XBC/XEC-DR20SU	AC 100 - 240, DC24V input 12 points, relay output 8 points
	XBC/XEC-DR30SU	AC 100 - 240, DC24V input 18 points, relay output 12 points
	XBC/XEC-DR40SU	AC 100 - 240, DC24V input 24 points, relay output 16 points
	XBC/XEC-DR60SU	AC 100 - 240, DC24V input 36 points, relay output 24 points
	XBC/XEC-DN20SU	AC 100 - 240, DC24V input 12 points, transistor output 8 points (Sink)
	XBC/XEC-DN30SU	AC 100 - 240, DC24V input 18 points, transistor output 12 points (Sink)
	XBC/XEC-DN40SU	AC 100 - 240, DC24V input 24 points, transistor output 16 points (Sink)
	XBC/XEC-DN60SU	AC 100 - 240, DC24V input 36 points, transistor output 24 points (Sink)
	XBC/XEC-DP20SU	AC 100 - 240, DC24V input 12 points, transistor output 8 points (Source)
	XBC/XEC-DP30SU	AC 100 - 240, DC24V input 18 points, transistor output 12 points (Source)
	XBC/XEC-DP40SU	AC 100 - 240, DC24V input 24 points, transistor output 16 points (Source)
	XBC/XEC-DP60SU	AC 100 - 240, DC24V input 36 points, transistor output 24 points (Source)
Block type unit (Economic)	XBC/XEC-DR10E	AC 100 - 240V, 6 points DC24V input, 4 point Relay ouput
	XBC/XEC-DR14E	AC 100 - 240V, 8 points DC24V input, 6 point Relay ouput
	XBC/XEC-DR20E	AC 100 - 240V, 12 points DC24V input, 8 point Relay ouput
	XBC/XEC-DR30E	AC 100 - 240V, 18 points DC24V input, 12 point Relay ouput
	XBC/XEC-DN10E	AC 100 - 240V, 6 points DC24V input, 4 point transistor output (Sink)
	XBC/XEC-DN14E	AC 100 - 240V, 8 points DC24V input, 6 point transistor output (Sink)
	XBC/XEC-DN20E	AC 100 - 240V, 12 points DC24V input, 8 point transistor output (Sink)
	XBC/XEC-DN30E	AC 100 - 240V, 18 points DC24V input, 12 point transistor output (Sink)
	XBC/XEC-DP10E	AC 100 - 240V, 6 points DC24V input, 4 point transistor output (Source)
	XBC/XEC-DP14E	AC 100 - 240V, 8 points DC24V input, 6 point transistor output (Source)
	XBC/XEC-DP20E	AC 100 - 240V, 12 points DC24V input, 8 point transistor output (Source)
	XBC/XEC-DP30E	AC 100 - 240V, 18 points DC24V input, 12 point transistor output (Source)

Product list


	Item	Model	Specifications
Modular type unit	XBM-DN32H	DC24V, 16 pts DC24V input, 16 pts TR output, 2 axes built-in positioning (APM)	
	XBM/XEM-DN32H2	DC24V, 16 pts DC24V input, 16 pts TR output, 2 axes built-in positioning (XPM)	
	XBM/XEM-DN32HP	DC24V, 16 pts DC24V input, 16 pts TR output, 6 axes built-in positioning (XPM)	
	XBM-DR16S	DC 24V, 8-point DC24V input, 8-point relay output	
	XBM-DN16S	DC 24V, 8-point DC24V input, 8-point TR output	
	XBM-DN32S	DC 24V, 16-point DC24V input, 16-point TR output	
Expansion I/O module	XBE-DC08A	8-point DC 24V input	
	XBE-DC16A	16-point DC 24V input	
	XBE-DC32A	32-point DC 24V input	
	XBE-RY08A	8-point relay output	
	XBE-RY16A	16-point relay output	
	XBE-TN08A	8-point Transistor (sink) output	
	XBE-TN16A	16-point Transistor (sink) output	
	XBE-TN32A	32-point Transistor (sink) output	
	XBE-TP08A	8-point Transistor (source) output	
	XBE-TP16A	16-point Transistor (source) output	
	XBE-TP32A	32-point Transistor (source) output	
	XBE-DR16A	8-point DC 24V input, 8-point relay output	
	XBE-DN32A	16-point DC24V input, 16point TR output	
Special module	XBF-AD04A	4-channel analog input (current/voltage)	
	XBF-AD04C	4-channel analog input (current / voltage, resolution : 1/16000)	
	XBF-AH04A	2-channel analog input (current/voltage)/2-channel analog output (current/voltage)	
	XBF-DV04A	4-channel analog output (voltage)	
	XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
	XBF-DC04A	4-channel analog output (current)	
	XBF-DC04C	4-channel analog input (current, resolution : 1/16000)	
	XBF-RD04A	4-channel RTD input	
	XBF-RD01A	1-channel RTD input	
	XBF-TC04S	4-channel Thermocouple input	
	XBF-TC04TT	Temperature controller, Thermocouple	
	XBF-TC04RT	Temperature controller, RTD	
	XBF-LD02S	Load Cell input module	
	XBF-PD02A	Line drive 2 axis	
	XBF-PN08B	EtherCAT Positioning module, 8axes (XBC/XEC "U" only)	
	XBF-PN04B	EtherCAT Positioning module, 4axes (XBC/XEC "U" only)	
Communication module	XBF-AD08A	8-channel analog input (Current/voltage)	
	XBF-HO02A	2-channel High-speed counter input (Open collector)	
	XBF-HD02A	2-channel High-speed counter input (Line drive)	
	XBL-C41A	Cnet (RS-422/485), 1ch	
	XBL-C21A	Cnet (RS- 232C), 1ch	
	XBL-EMTA	Fast Ethernet (100Mbps), 1ch	
	XBL-EIMT	RAPIEnet, 2 ch	
	XBL-EIPT	Ethernet/IP, 2 ch	
	XBL-EIMF	RAPIEnet I/F, Max. 2km (Fiber 2ch.), 100Mbps	
	XBL-EIMH	RAPIEnet I/F (Twisted pair 1ch, Fiber 2 ch.), 100Mbps	
	XBL-PMEC	Profibus-DP, Master, RS-485	
	XBL-PSEA	Profibus-DP, Slave, RS-485	
Loader cable	XBL-DSEA	DeviceNet, Slave	
	XBL-PSEA	Profibus-DP, Slave, RS-485	
	XBL-RMEA	Rnet, Master	
	XBL-CMEA	CANopen (10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps, Num of PDO : 32)	
	XBL-CSEA	CANopen (10, 20, 50, 100, 125, 250, 500, 800, 1000Kbps, Num of PDO : 64)	
	PMC-310S	Connection cable (PC to PLC), 9pin(PC)-6pin(PLC)	
	USB-301A	Connection cable (PC to PLC), USB	

Product list

Item	Model	Specifications
Memory module	XBO-M2MB	Memory
	XBO-AD02A	Voltage/Current, Input 2 ch
	XBO-DA02A	Voltage/Current, Output 2 ch
	XBO-AH02A	Voltage/Current, Input 1ch/Voltage/Current, Output 1ch
	XBO-TC02A	TC (Thermo couple), Input 2 ch
Option modules	XBO-RTCA	RTC (Real time clock), Battery
	XBO-DC04A	DC 24V, Input 4 points
	XBO-TN04A	TR (Sink), Output 4 points
	XBO-RD01A	RTD (Resistance temperature detector), Input 1ch


Connection cable	XBF-PD02A	XBF-HO02A	XBF-HD02A	XBE-DC32A	XBE-TN32A	XBE-TP32A	XBM-DN16S	XBM-DN32S	XBM-DN32H	XBM/XEM-DN32HP (H2)	XGB-UP
R40H/20HH-05S-XBM3	-	-	-	-	-	-	●	●	-	-	-
R40H/20HH-10S-XBM3	-	-	-	-	-	-	●	●	-	-	-
C40HH-05SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-10SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-15SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-20SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-30SB-XBI	●	●	●	●	●	●	-	-	●	●	●
C40HH-05SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-10SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-15SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-20SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-30SB-XBE	-	-	-	-	●	●	-	-	-	-	-
C40HH-05SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-10SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-15SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-20SB-XBE	-	-	-	-	●	-	-	-	-	-	-
C40HH-30SB-XBE	-	-	-	-	●	-	-	-	-	-	-

Download cable diagram

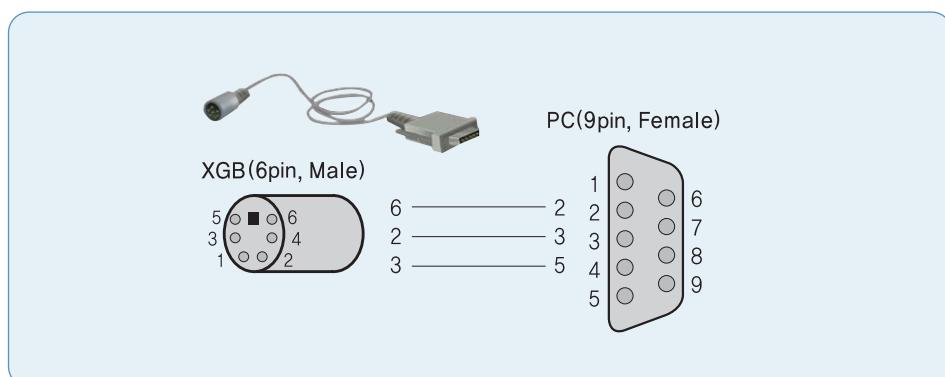


Block type unit


XBC/XEC-U (Standard)

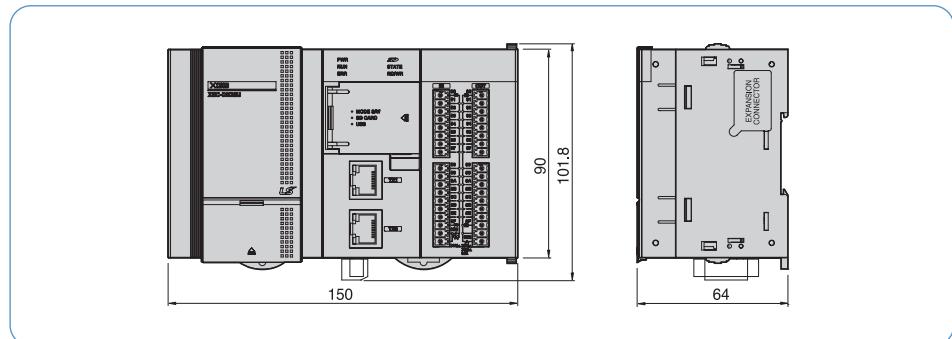



XBC/XEC-H

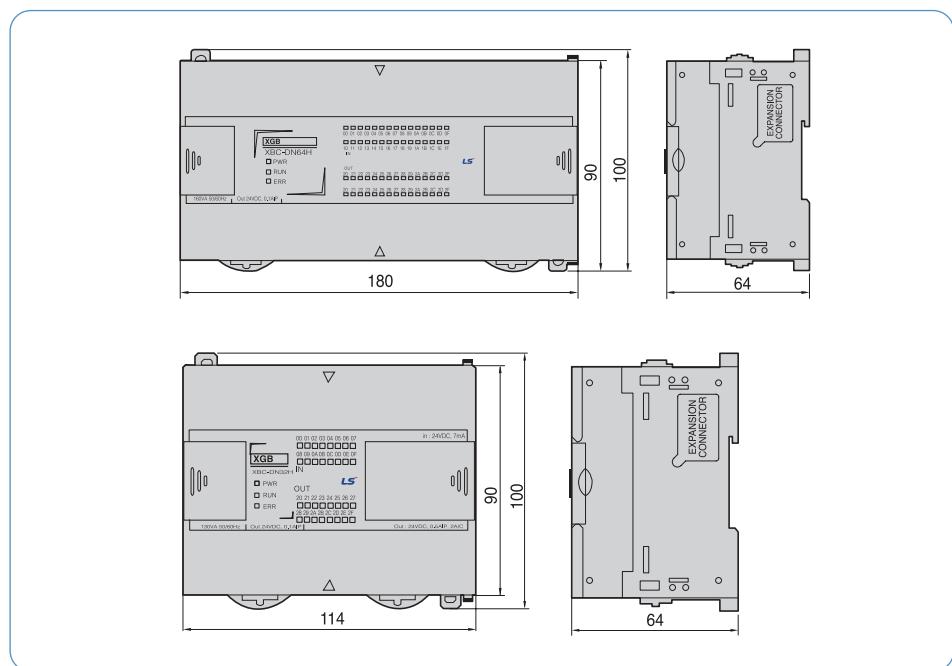

XBC/XEC-SU

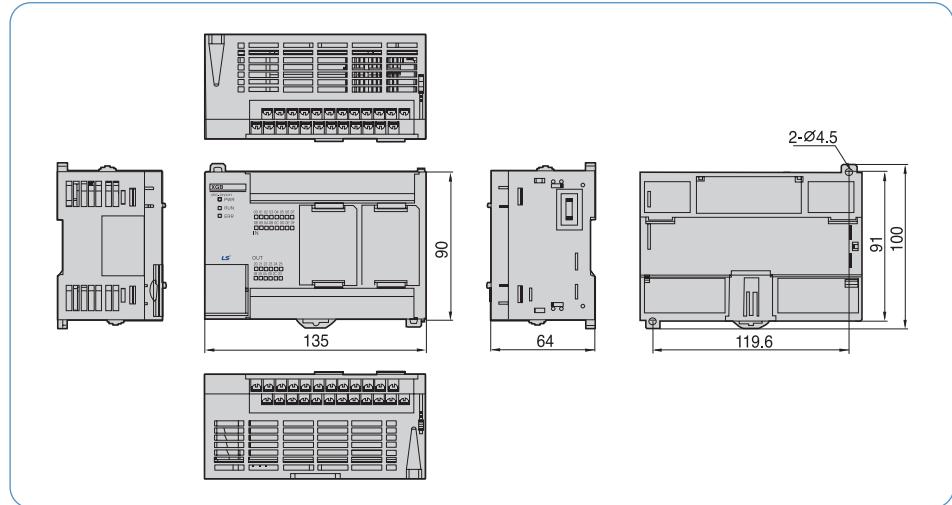



XBC/XEC-E

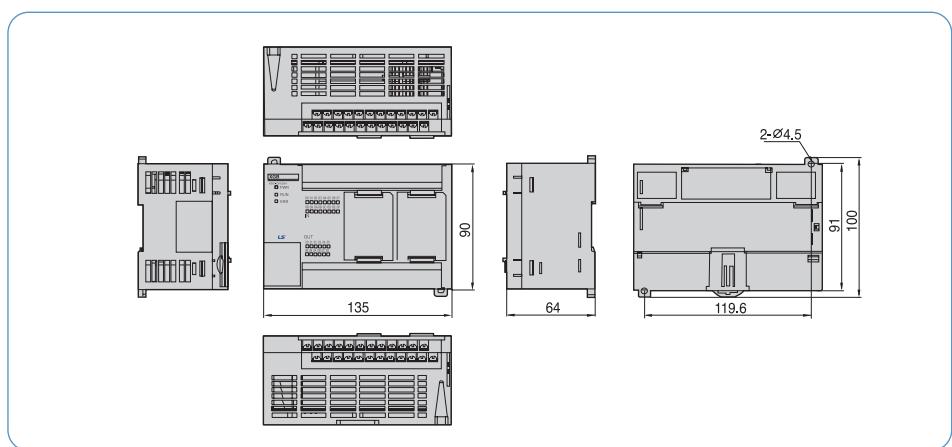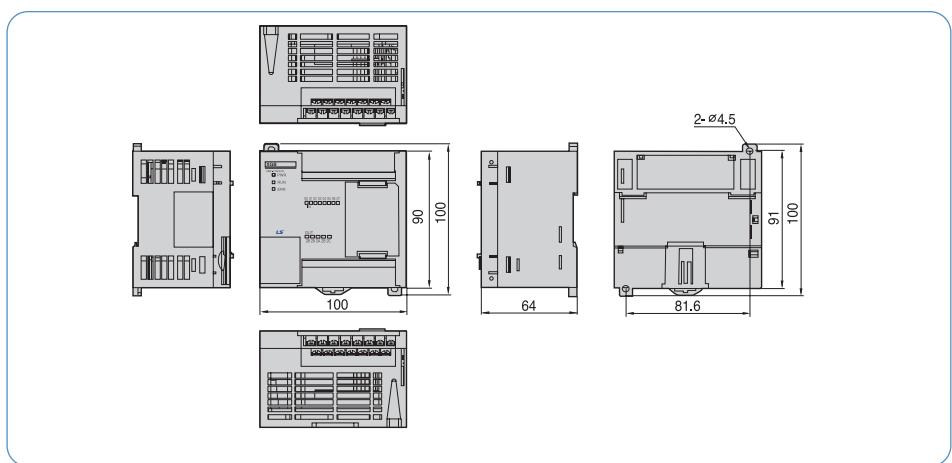

Modular type unit

XBM-S

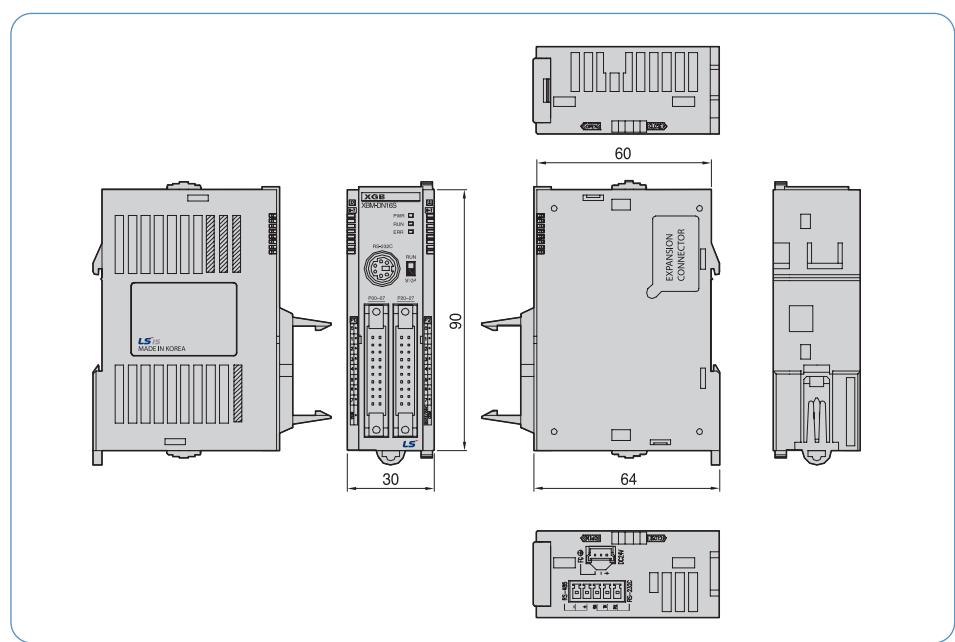

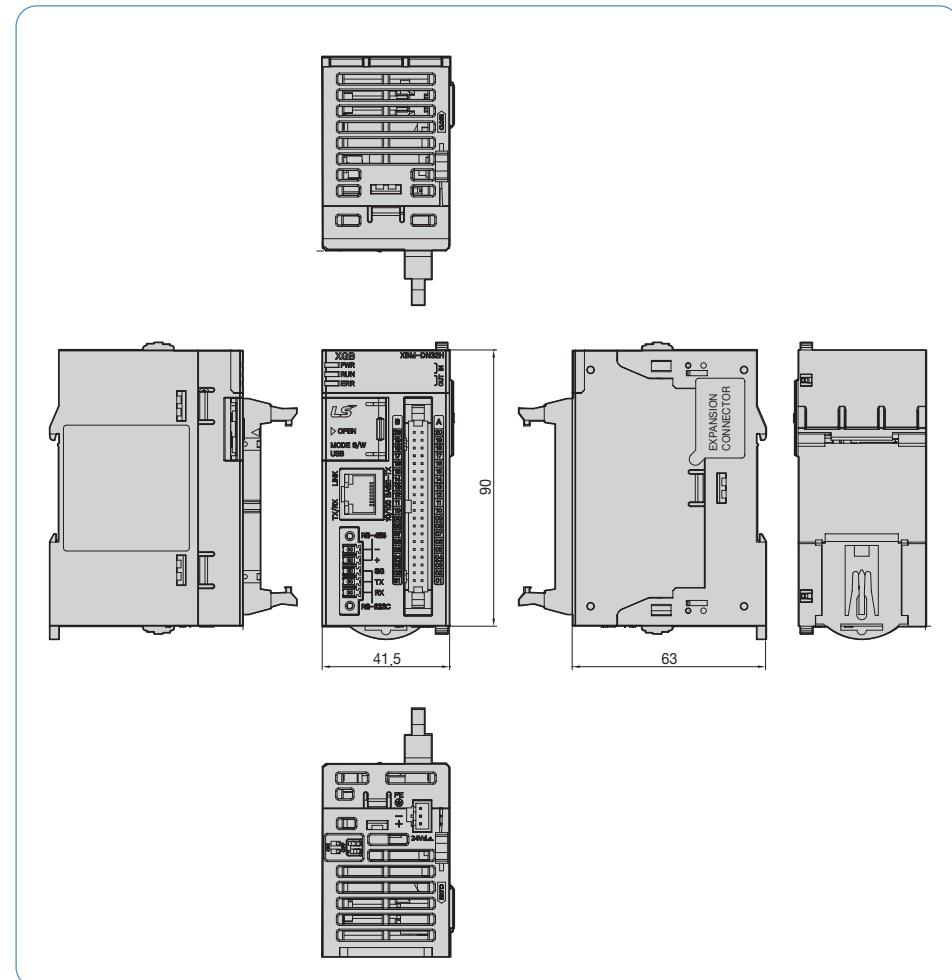Modular type unit**XBM-H, H2, HP**

Memo

Programmable Logic Controller

APPLICATION



Memo

A large, light gray rectangular area intended for writing a memo. It occupies most of the page below the header.

We open up a brighter future through
efficient and convenient energy solutions.



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



www.lsis.com

■ Head Quarter

LS-ro 127(Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea
Tel: (82-2)2034-4870/Fax : 82-2-2034-4648 E-mail : cshwang@lsis.com

Southeast Asia +82-2-2034-4888 cshwang@lsis.com (Charles Hwang)

Europe +82-2-2034-4676 sukyong@lsis.com (Brian Choi)

Turkey/Israel/CIS +82-2-2034-4879 dkimc@lsis.com (Daniel Kim)

Oceania +82-2-2034-4394 kacho@lsis.com (Kendra Cho)

North/Latin America +82-2-2034-4286 hkchung@lsis.com (Hank Raul Chung)

Southwest Asia/Africa +82-2-2034-4467 myleed@lsis.com (Henry Lee)

Middle East +971-4-886-5360 khchoi1@lsis.com (Lambert Choi)

■ Overseas Subsidiaries

• **LSIS(Dalian) Co., Ltd. (Dalian, Chin)**

Tel: 86-411-8730-7510 Fax: 86-411-8730-7560 E-Mail: jiheo@lsis.com

• **LSIS(Wuxi) Co., Ltd. (Wuxi, China)**

Tel: 86-510-8534-6666-8005 Fax: 86-510-8534-4078 E-Mail: sunhwank@lsis.com

• **LS VINA Industrial Systems Co., Ltd. (Hanoi, Vietnam)**

Tel: 84-4-6275-8055 Fax: 84-4-3882-0220 E-Mail: hjchoi@lsis.com

• **LSIS Middle East FZE (Dubai, U.A.E.)**

Tel: 971-4-886-5360 Fax: 971-4-886-5361 E-Mail: jungyong@lsis.com

• **LSIS Europe B.V. (Amsterdam, Netherlands)**

Tel: 31-20-654-1420 Fax: 31-20-654-1429 E-Mail: europartner@lsis.com

• **LSIS Japan Co., Ltd. (Tokyo, Japan)**

Tel: 81-3-6268-8241 Fax: 81-3-6268-8240 E-Mail: jschuna@lsis.com

• **LSIS USA Inc. (Chicago, U.S.A.)**

Tel: 1-800-891-2941 Fax: 1-847-383-6543 E-Mail: sales.us@lsis.com

■ Overseas Branches

• **LSIS Shanghai Office (China)**

Tel: 86-21-5237-9977 Fax: 86-21-5237-7189 E-Mail: ygeo@lsis.com

• **LSIS Beijing Office (China)**

Tel: 86-10-5761-3127 Fax: 86-10-5761-3128 E-Mail: sson@lsis.com

• **LSIS Guangzhou Office (China)**

Tel: 86-20-8326-6784 Fax: 86-20-8326-6287 E-Mail: sojetroh@lsis.com

• **LSIS Qingdao Office (China)**

Tel: 86-532-8501-6058 Fax: 86-532-8501-6057 E-Mail: sson@lsis.com

• **LSIS Chengdu Office (China)**

Tel: 86-28-8670-3200 Fax: 86-28-8670-3203 E-Mail: yangcf@lsis.com

• **LSIS ShenYang Office (China)**

Tel: 86-24-2321-9050 Fax: 86-24-8386-7210 E-Mail: yangcf@lsis.com

• **LSIS Jinan Office (China)**

Tel: 86-531-8699-7826 Fax: 86-531-8697-7628 E-Mail: yangcf@lsis.com

• **LSIS Co., Ltd. Tokyo Office (Japan)**

Tel: 81-3-6268-8241 Fax: 81-3-6268-8240 E-Mail: jschuna@lsis.com

• **LSIS Co., Ltd. Rep. Office (Vietnam)**

Tel: 84-8-3823-7890 E-Mail: sjbaik@lsis.com

• **LSIS Moscow Office (Russia)**

Tel: 7-499 682 6130 E-Mail: info@lsis-ru.com

• **LSIS Jakarta Office (Indonesia)**

Tel: 62-21-293-7614 E-Mail: dioh@lsis.com

• **LSIS Bangkok Office (Thailand)**

Tel: 66-2-053-9133 E-Mail: sjleet@lsis.com